


# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: 89103	NAME: Mahowald Chandelier
MATERIAL TYPE: Steel/Glass	FINISH: Antique Brass/Clear Crackle
SOCKET TYPE: E12	SOCKET QTY: 16
BULB WATTAGE: 25W	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 77.5LBS

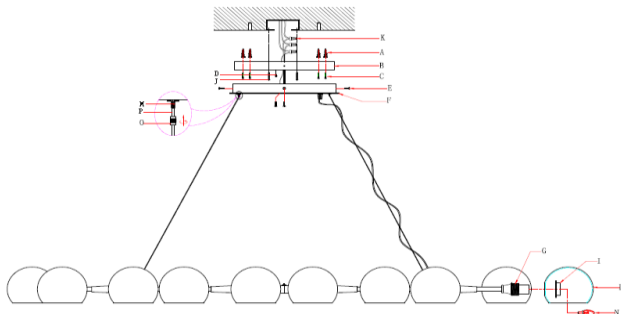

## PARTS INCLUDED:

A ANCHOR	4PCS	I SOCKET RING	16 PCS
B MOUNGTING PLATE	1 PC	N BULB(NOT INCLUDI	16 PCS
C STRENGTHEN SCREW	4PCS	L GLASS	16 PCS
E SET SCREW	4 PCS	M WIRE HOLDER TUE	4 PCS
F CANOPY	1 PC	O LOCK RING	1PC
G SOCKET	16 PCS	P AIRCRAFT WIRE	4 PCS

## HARDWARE INCLUDED:

K Plastic Wire Connector	Allen Wrench
J Mounting Screws	Green Ground Screw

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



## TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Ensure you have all parts Remove all packing contents and parts from the carton(s) carefully.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(b)from the canopy(f)by loosening canopy set screws€.
4. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
5. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (b) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
6. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
7. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
8. Gently tuck the wire connections neatly into the ceiling junction box.
9. To adjust the appropriate length of the aircraft wire (p), loosen the lock ring(o) first then push down the wire holder tubing (m). After the length has been appropriately adjusted, screw the lock ring(o) onto the wire holder tubing(m) till tight.
10. Place the mounting plate(b) on the ceiling j-box and mark 4 spots on the ceiling with a pencil to drill holes. Make sure the holes are aligned with holes on the mounting plate(b).
11. Drill 4 holes on the spots then insert plastic anchors (a) into drilled holes for fastening the fixture and fasten it loosely to check the alignment.
12. Attach the mounting plate (b) to the ceiling outlet box using the enclosed set screws (e) and tighten screws with a screwdriver.
13. Fasten the mounting plate(b) by affixing strengthen screws (c) into plastic wall anchors (a) securely. Make sure the anchor(a) and strengthen screws(c) is tightened enough.
14. Remove the socket ring(i), attach the glass(l) on the fixture and then secure with the socket ring(i).
15. Insert 16 type b 25w bulb (not included) into the sockets. Do not exceed specified wattage.
16. Restore power to the junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS