

LED Product Information and Warnings

Important

- **Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**
- **Consult a qualified, licensed electrician to ensure correct branch circuit conductor.**
- Please read all included assembly instructions and warnings carefully before installation. Contact Customer Service if you have any questions or concerns. Before installation, please confirm that the fixture is compatible with your supply voltage and dimming system, if present.
- LEDs are highly sensitive electronic devices, and must be treated with care. Do not open any factory sealed compartments, and avoid touching the LEDs with your hands or any object.
- Although all our fixtures are equipped with protective devices, LED fixtures are vulnerable to power surges and supply variations. Do not install LED fixtures on the same circuit as any motors, appliances, or HVAC systems.
- Do not remove or bypass any LED Driver or Transformer that is provided with the fixture, and do not replace or substitute with another power supply.
- Remote LED Driver or Transformer installation must be done by a licensed electrician and in accordance with local codes. Remote installations should be in an accessible location, as close to the fixture as possible.
- Fixtures must be wired in parallel on independent leads; do not "daisy chain" multiple fixtures together or wire them in series.
- All factory-made splices and connections must remain intact. LED circuits are carefully designed and built, and improper connections may damage the fixture.
- The ends of coaxial pendant cords have been precisely stripped and split at the factory and must not be field cut. Excess cord or cable should be neatly coiled and reserved in the fixture canopy.
- Any mounting hardware is provided for your convenience and should be used with discretion. Always use the appropriate hardware for the mounting surface.

October 20, 2016

Assembly Instructions

2654


INSTRUCTIONS D'INSTALLATION

Light Guide Ring Series - 3-Light LED Pendant

Important

- Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.
- Consult a qualified, licensed electrician to ensure correct branch circuit conductor.
Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats.

1. Shut off power to the outlet box (A).
2. Attach the mounting plate (B) to the outlet box (A) using the outlet box screws (C).
3. Determine the height at which the fixture (D) is to be hung. Feed the fixture wires through the appropriate number of stem sections (E) for the desired length and screw them together and into the fixture.
4. Screw in bottom stem section (F) into the fixture.
5. Feed the fixture wires through the canopy (G) and screw the canopy onto the stem (E).
6. Make appropriate electrical connections using wire nuts:
 - a) Connect the fixture's positive wire (red) to the LED driver's live output wire (red). Connect the fixture's neutral wire (black) to the LED driver's neutral output wire (black).
 - b) Connect the LED driver's (H) live wire (black) to the live outlet box wire.
 - c) Connect the LED driver's (H) neutral wire (white) to the neutral outlet box wire.
 - d) Connect the fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate (B) using green screw (included).
 - e) Carefully place connections in outlet box (A).
7. Install the canopy (G) to the mounting plate (B) using the finials (J).
8. Remove plastic film from light guide disks (K).
9. Restore power to the fixture.

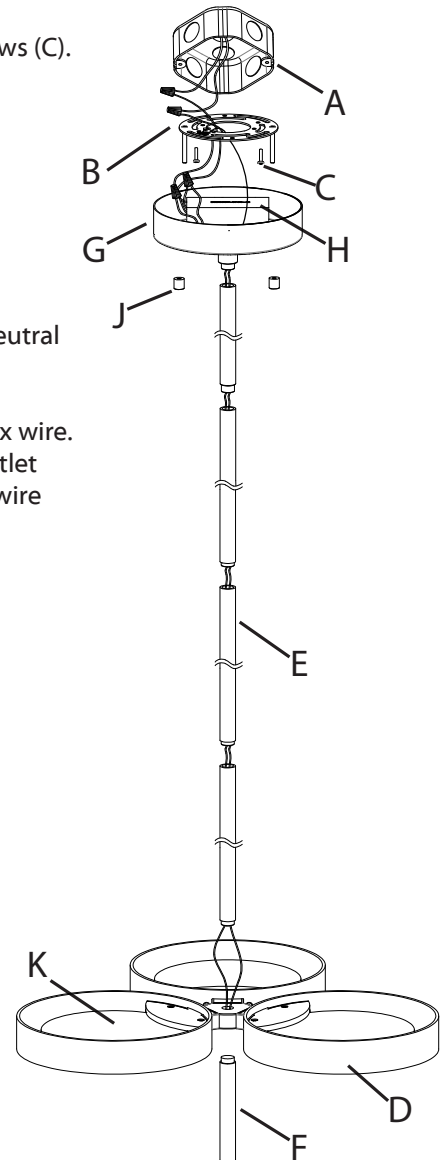

Note

- Do not scratch light guide disks or light output will be affected.
- This fixture is dimmable with Electronic Low Voltage (Trailing-Edge), Incandescent (Leading-Edge), and 0-10V type dimmers only.

Care Instructions

- **Dusting:** Use a clean, dry cloth.
- **Cleaning:** To protect the finish, avoid any harsh abrasives or chemicals.