

**BATH COLLECTION** 



These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

This product is dimmable with a low-voltage electronic dimmer.

This product can be mounted vertically or horizontally.

**CAUTION:** Do not use chemical cleaning products on LEDs. To clean, wipe gently with a clean, dry cloth.

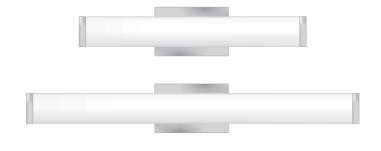


#### **CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

# Install the Backplate

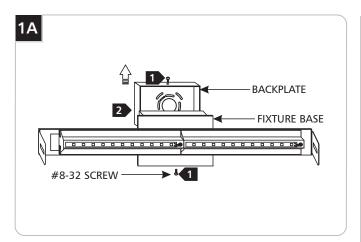


- Remove the two #8-32 screws on the backplate with a Phillips head screwdriver.
- 2 Remove the backplate from the fixture base.

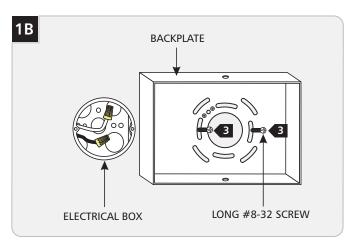


Mount the backplate to the electrical box with two long #8-32 screws.

## **Connect the Power**

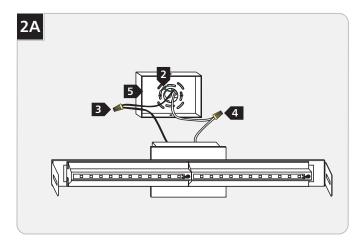


- 1 Turn the power to the electrical box off.
- 2 Make sure that the backplate is grounded in accordance with local electrical codes.
- Connect the black fixture wire(s) to the hot power line wire with a wire nut.
- Connect the white fixture wire(s) to the neutral power line wire with a wire nut.
- **5** Properly place all wires into the backplate.

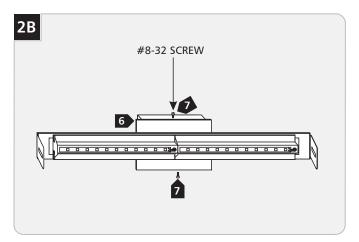

- 6 Place the fixture base onto the backplate and align the holes.
- **7** Replace and tighten the #8-32 screws.

## **Install the Shade**

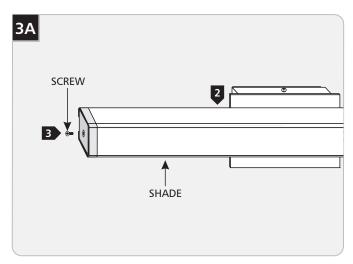

- 2 Carefully slide the shade onto the fixture base.
- Install the screws to the ends of the shade to hold the shade in place.

### **SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077 847.410.4400

#### www.techlighting.com

© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company