
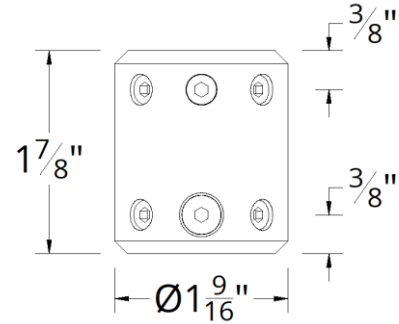


# Downrods & Downrod Couplers

XF, XF-I

MODERN FORMS  
SMART FANS

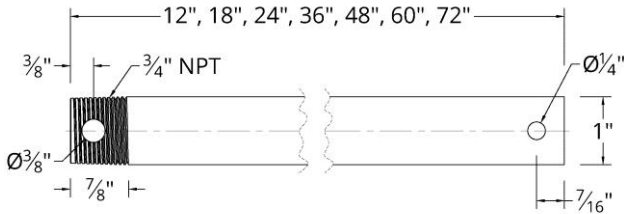

## PRODUCT DESCRIPTION

All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security, and allow for adjustments in the field. Downrod couplers can be used to connect two downrods together. Our downrods and downrod couplers are weather-resistant and are available in all finishes.

## SPECIFICATIONS

- Construction:** Weather-resistant galvanized steel
- Downrod Dimensions:** 1" O.D., 0.75" I.D.
- Coupler Dimensions:** 1" I.D.
- Downrod Lengths:** 12", 18", 24", 36", 48", 60" and 72"

## DOWNROD FEATURES

- Available in all fan finishes
- Downrods can be field cut
- Suitable for Wet Location

## DOWNROD COUPLER FEATURES

- Available in all fan finishes
- Includes hardware
- Suitable for Wet Location

## ORDER NUMBER

Model	Finish
<b>XF-12</b> 12in	<b>AS</b> Automotive Silver <b>KO</b> Koa <sup>†</sup>
<b>XF-18</b> 18in	<b>BA</b> Brushed Aluminum <b>MB</b> Matte Black
<b>XF-24</b> 24in	<b>BZ</b> Bronze <b>MW</b> Matte White
<b>XF-36</b> 36in	<b>CFI</b> Carbon Fiber* <b>OB</b> Oil Rubbed Bronze
<b>XF-48</b> 48 in	<b>DW</b> Dark Walnut <b>SS</b> Stainless Steel
<b>XF-60</b> 60 in	<b>GB</b> Gloss Black <b>TT</b> Titanium Silver
<b>XF-72</b> 72 in	<b>GH</b> Graphite
<b>XF-I</b>	<b>GW</b> Gloss White

Examples: Downrod - **XF-12-BZ**, Downrod Coupler - **XF-I-BZ**

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire.

\* Carbon Fiber downrods available in 12", 18", 24" and 36"

† Koa downrods available in 12", 18", 24", 36" and 48"

modernforms.com  
Phone (866) 810.6615  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760