


ASSEMBLY INSTRUCTIONS

Option 1: Canopy Mounted Driver

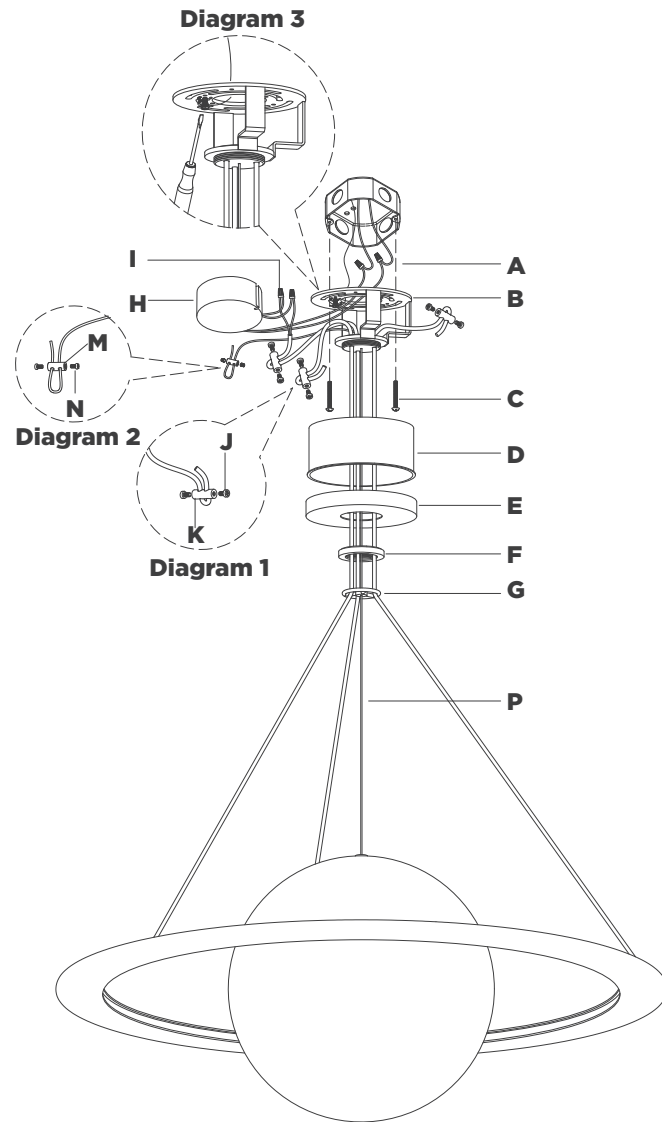

Cosmos 28" Ring and Orb Chandelier

Item # BBL5167

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (E) and driver housing (D) from tall mounting plate (B) by removing collar ring (F).
3. Install tall mounting plate (B) to the junction box and secure with mounting screws (C).
4. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
5. Feed hanging cables through metal ring (G), collar ring (F), canopy (E) and driver housing (D).
6. Route three hanging cables through holes on tall mounting plate (B) bracket. Loosen set screw (J) on cable lock (K) and install to end of hanging cables. Insert other end of cables through the cable lock and adjust to desired length. Once complete re-secure set screw (J). Repeat steps with the remaining wires (see diagram 1).
7. After fixture height is achieved shorten wires by using a pair of cutters, leaving enough wire to connect to driver (H).

ASSEMBLY INSTRUCTIONS

Option 1: Canopy Mounted Driver

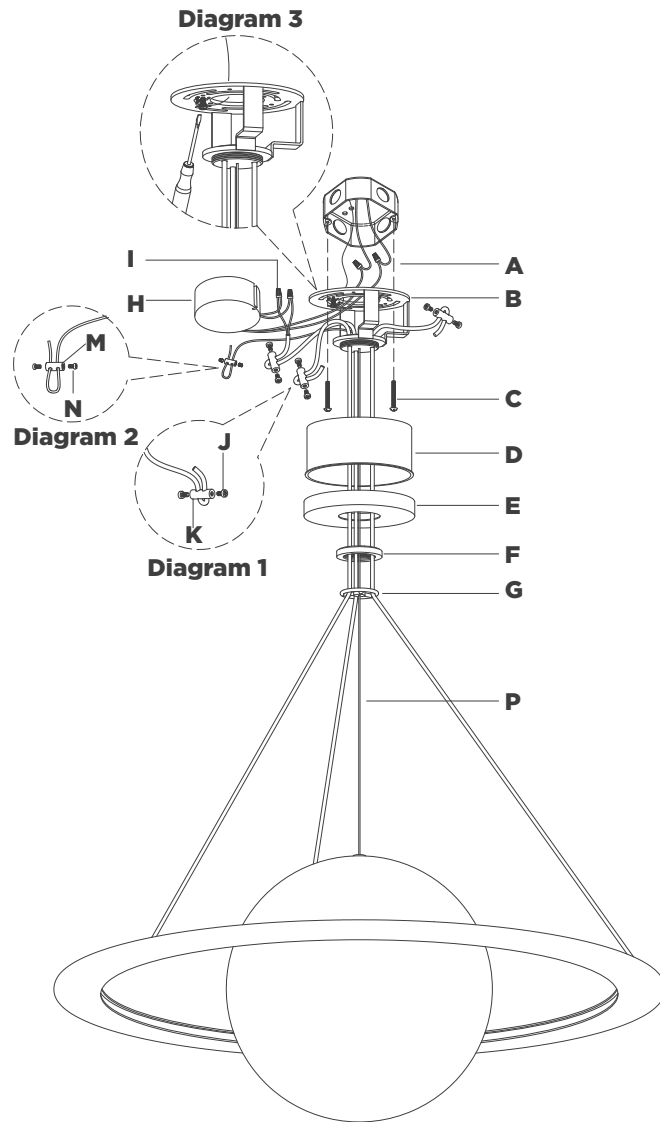

Cosmos 28" Ring and Orb Chandelier

Item # BBL5167

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

8. Feed hanging cable **(P)** through metal ring **(G)**, collar ring **(F)**, canopy **(E)** and driver housing **(D)**.
9. Route hanging cable **(P)** through center hole on tall mounting plate **(B)** bracket. Loosen set screw **(N)** on cable lock **(M)** and install to end of hanging cable. Insert other end of cables through the cable lock and adjust to desired length. Once complete re-secure set screw **(N)** (see diagram 2).

10. Remove outer housing of wire by making a neat cut all the way around, about 6 mm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.

NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.

11. Separate wires (marked "+" & "-") and strip insulation on each 5/8".
12. Connect driver **(H)** output neutral wire (black) to the fixture neutral wire (marked "-") using wire nut **(I)**.
13. Connect driver **(H)** output hot wire (red) to the fixture hot wire (marked "+") using wire nut **(I)**.


CAUTION: Do not reverse the hot and neutral connections.

14. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 3). Tighten.

NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

Option 1: Canopy Mounted Driver

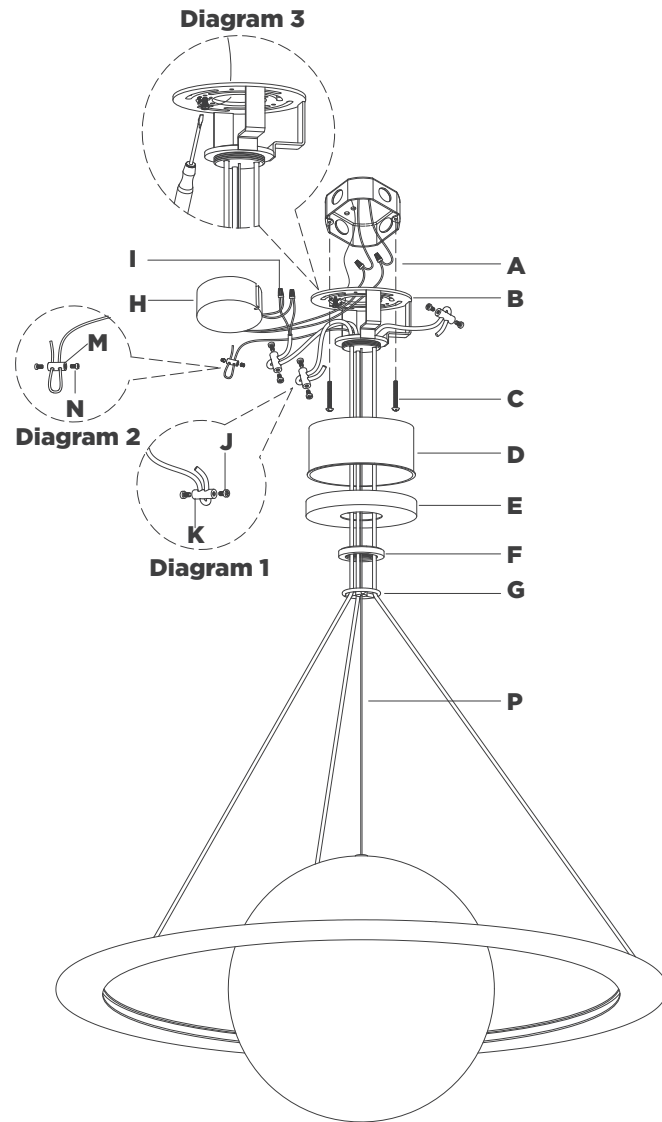

Cosmos 28" Ring and Orb Chandelier

Item # BBL5167

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

15. Connect driver **(H)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
16. Connect driver **(H)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.


CAUTION: Do not reverse the hot and neutral connections.

17. Make sure all wire connections are tight, then carefully tuck into the junction box.
18. Insert driver **(H)** into the middle of tall mounting plate **(B)** bracket.
19. Install driver housing **(D)** and canopy **(E)** to mounting plate **(B)** and secure with collar ring **(F)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS

Option 2: Ceiling Mounted Driver

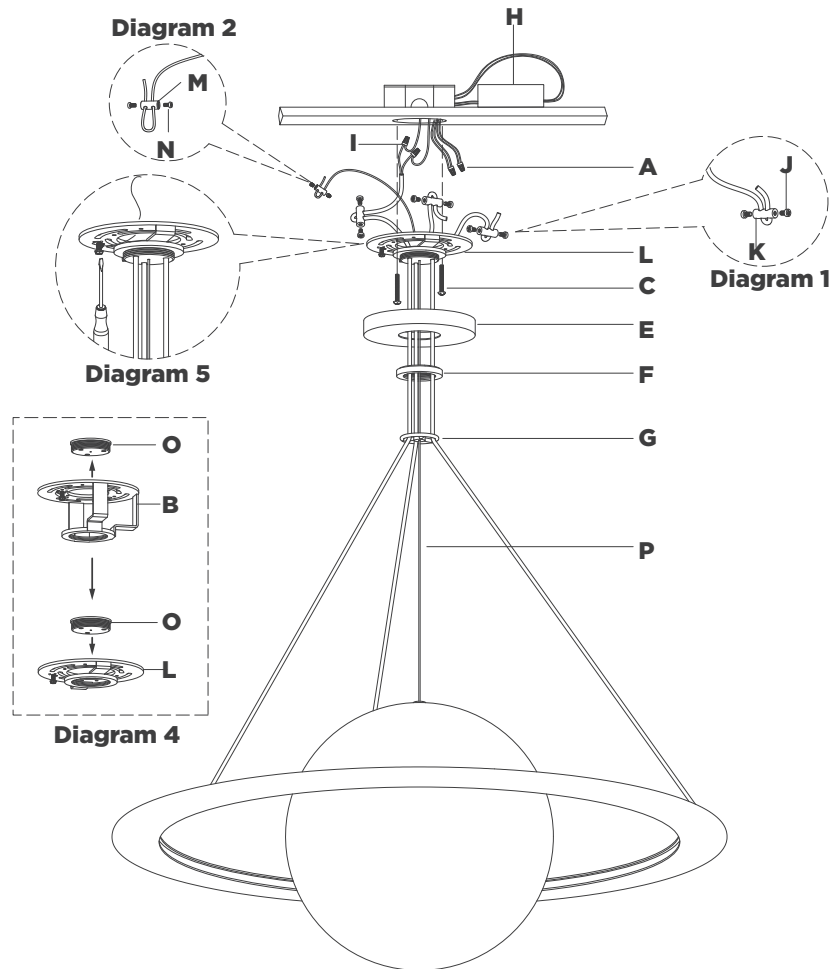

Cosmos 28" Ring and Orb Chandelier

Item # BBL5167

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Place driver **(H)** into ceiling and route all wires through one of the knockouts in the junction box.
3. Remove canopy **(E)** and driver housing **(D)** from mounting plate **(B)** by removing collar ring **(F)**.
4. Remove collar **(O)** from tall mounting plate **(B)**, then thread collar **(O)** to short mounting plate **(L)** (see diagram 4).
NOTE: Driver housing **(D)** and tall mounting plate **(B)** will be not be used for ceiling mounted assembly. Keep part and store for future use.
5. Install short mounting plate **(L)** to the junction box and secure with mounting screws **(C)**.
6. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
7. Feed hanging cables through metal ring **(G)**, collar ring **(F)** and canopy **(E)**.

Option 2: Ceiling Mounted Driver

ASSEMBLY INSTRUCTIONS

Option 2: Ceiling Mounted Driver

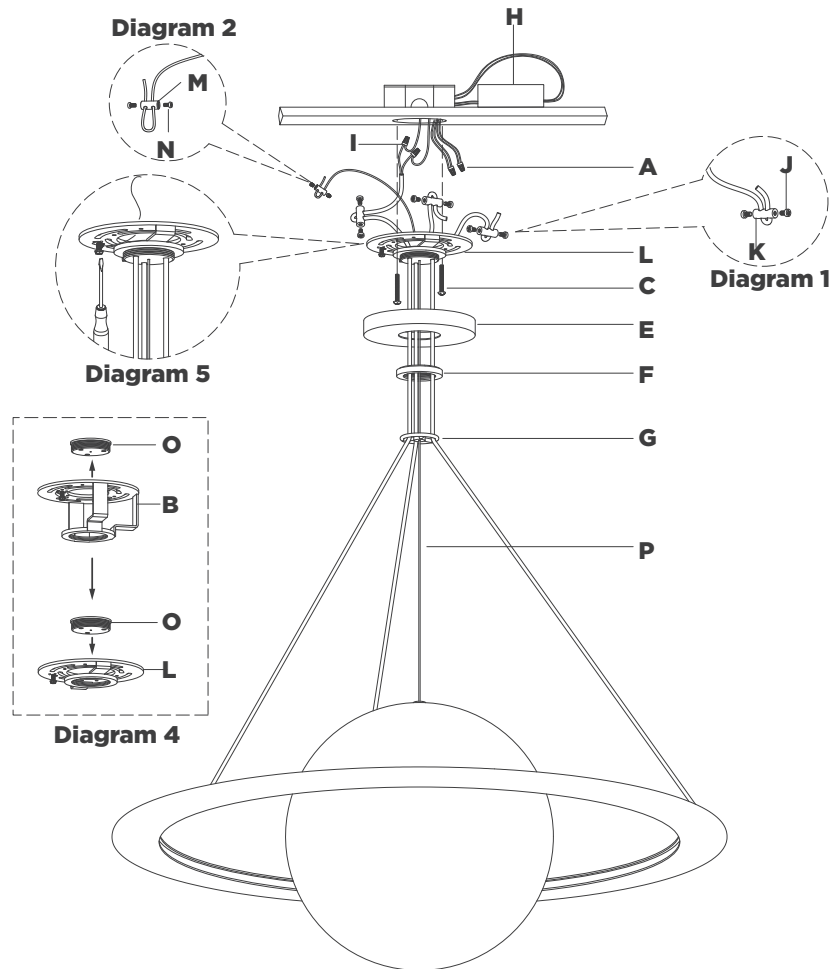

<<LongDesc>>

Item # BBL5167

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

14. Connect driver **(H)** output neutral wire (black) to the fixture neutral wire (marked “-”) using wire nut **(I)**.
15. Connect driver **(H)** output hot wire (red) to the fixture hot wire (marked “+”) using wire nut **(I)**.

CAUTION: Do not reverse the hot and neutral connections.

16. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 4). Tighten.

NOTE: It is imperative that the fixture is grounded.

17. Connect driver **(H)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
18. Connect driver **(H)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

19. Make sure all wire connections are tight, then carefully tuck into the junction box.

CAUTION: Do not reverse the hot and neutral connections.

20. Install canopy **(E)** to short mounting plate **(L)** and secure with collar ring **(F)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.