


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

| | |
|---------------------------------|--------------------------|
| ITEM NO.: 89661 | NAME: Sierra Chandelier |
| MATERIAL TYPE: Alabaster | FINISH: English Bronze |
| SOCKET TYPE: E12 | SOCKET QTY: 9 |
| BULB WATTAGE: 8W LED BULBS ONLY | |
| VOLTAGE: 110-120 V | ITEM NET WEIGHT: 35.5LBS |

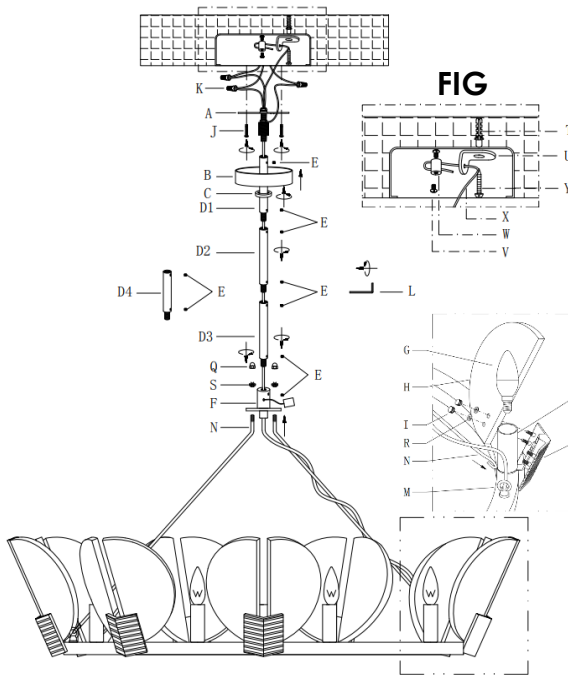

PARTS INCLUDED:

| | | | |
|-------------------------|---------|-------------------|---------|
| (A) Mounting Plate | Qty: 1 | (R) Washer | Qty: 36 |
| (B) Canopy | Qty: 1 | (N) Hanging Hook | Qty: 3 |
| (C) Collar Loop | Qty: 1 | (M) Metal Loop | Qty: 3 |
| (D1,D2,D3,D4) Rod | Qty: 4 | (O) Metal Plate | Qty: 9 |
| (E) Hex Screw | Qty: 9 | (P) Socket | Qty: 9 |
| (F) Lamp Body | Qty: 1 | (Q) Domed Cap Nut | Qty: 3 |
| (G) Bulb - Not Included | Qty: 9 | (S) Hexagon Nut | Qty: 3 |
| (H) Alabaster Slice | Qty: 18 | (X) Steel Rope | Qty: 1 |
| (I) Knurled Nut | Qty: 36 | | |

HARDWARE INCLUDED:

| | |
|----------------------------|------------------|
| (K) Plastic Wire Connector | (L) Allen Wrench |
| (J) Mounting Screw | (T) Anchor |
| Green Ground Screw | (U) Bracket |
| (W) Coupling | (V) Set Screw |
| (Y) Strengthened Screw | |

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Ensure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Connect lamp body (F) and canopy (B) with rod (D1, D2, D3, D4), when you connect the rods, loosen the small hex screws (E) first, then tighten it with Allen wrench (L). After all rods are connected. Be sure all the hex screws (E) are tight enough. Note: if you want the fixture to be semi-flush mount, you only need connect lamp body (F) and canopy (B) with rod (D4).
4. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare wire is the grounded wire.
5. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (K) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (A) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
6. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (K) and wrap the connection with electrical tape. Be sure no strands are exposed.
7. Connect the hot fixture wire to the hot junction box wire. Fasten together with a plastic wire connector (K) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
8. Drill 1 hole inside the junction box and fasten the bracket (u) to wall with strengthen screw (Y) on drilled hole as fig 1. If attach to cement ceiling, use anchor (T) first then screw strengthened screw (Y) into the anchor (T). If attach to wood ceiling, thread strengthened screw (y) directly into ceiling. Pass the steel cord (X) through the hole of bracket (U) and pass the steel cord (X) through the 2 holes of coupling (W), then fix with 2 pcs set screws (V) in the coupling (W) as fig.1. Be sure to tighten these 2 set screws (V) attached in the coupling (W).
9. Gently tuck the wire connections neatly into the junction box.
10. Attach the mounting plate (A) to the outlet box by using the mounting screws (J) and tighten screws with a screwdriver.
11. Push collar loop (C) in canopy (B) and tighten onto nipple in mounting plate (A) by turning in a clockwise direction.
12. Insert the threaded side of the hanging hook (N) into the metal plate of the lamp body (F) and fix the hanging hook (N) with hexagon nut (S) and domed cap nut (Q). Repeat the same operation on the other two pieces of hanging hooks (N), then attach the bottom of the hanging hook (N) to the metal loop (M) respectively.
13. Attach the alabaster slice (H) on the threaded pipe of the metal plate (O) and tighten it with washer (R) and knurled nut (I). Repeat the same operation on the other alabaster slices (H).
14. Insert 9 type b 8w led (only) bulb (not included) into the socket (P). Do not exceed specified wattage.
15. Restore power to the junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS