

# PALECEK®

601 PARR BOULEVARD | RICHMOND | CA 94801

## WALL SCONCE INSTALLATION INSTRUCTIONS

### Lima Chandelier

284179

#### PROFESSIONAL INSTALLATION REQUIRED

**CAUTION: BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**

#### Important Safety Instructions:

- These instructions are provided for your safety. It is important that they are read carefully before use to ensure safe operation of the product.
- Installation by a licensed professional electrician required.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- This fixture has been rated for up to four (4) **40 watt max E26 medium base bulb** (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY.
- **Save these instructions.**

#### WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **Check the cable properly for any loose or damaged connections.**
- **When the unit is no longer functioning, do not attempt to fix it by yourself. Only a qualified technician is allowed to disassemble and repair.**
- **If the external flexible cable cord of this luminaire is damaged it shall be exclusively replaced by a qualified electrician in order to avoid hazard.**


## Pre-Assembly:

- Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended
- Lay the product out on the floor. If there is no carpet, cover the floor with a soft cloth so as not to scratch the finish of the light or the floor.

**TOOLS REQUIRED (not included):** Ladder, Phillips Head Screwdrivers, and Wire Cutter/Stripper & Electrical Tape.


### Parts List:

- A) Plastic wire connector (3)
- B) Mounting Bracket (1)
- C) Mounting Screws (4)
- D) Canopy
- E) Canopy holder with threaded tube (1)
- F) Lock ring (1)
- G) Q-Link (1)
- H) Connecting Rods (18", 12", 6", 3.75")
- I) Chandelier Fixture (1)
- J) Socket (4)
- K) Bottom Bowl (1)

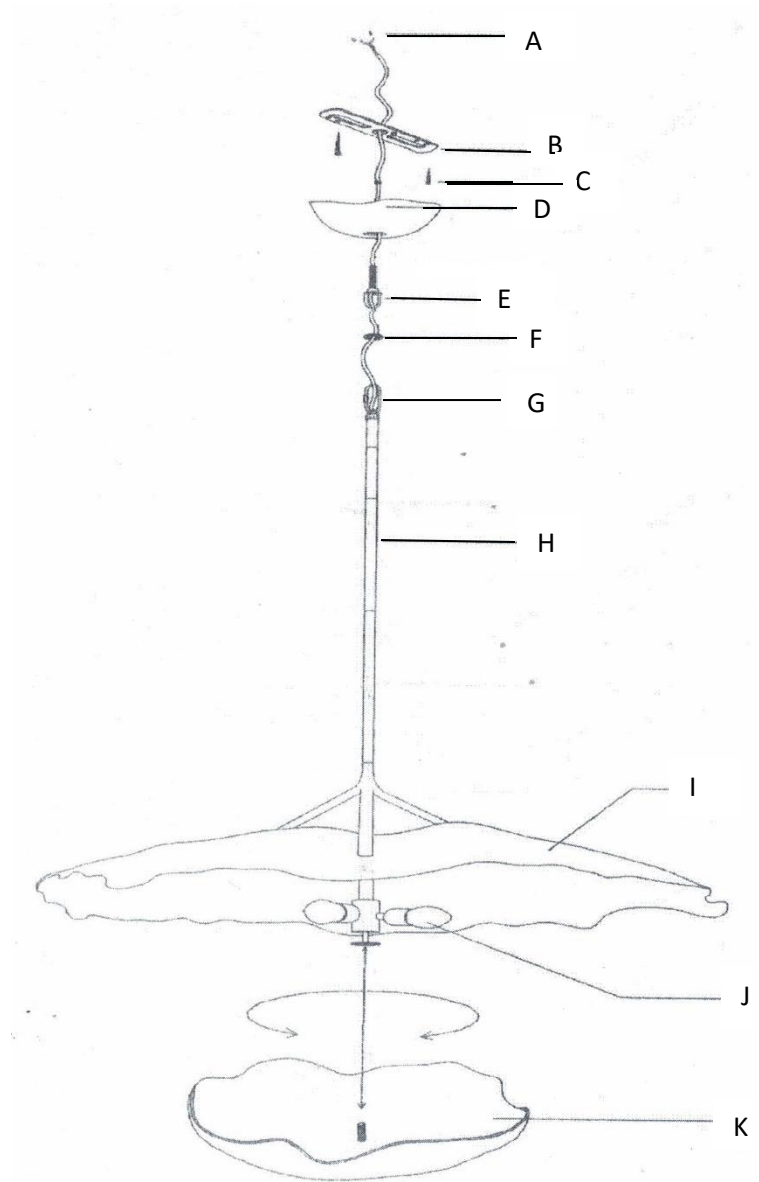

## Installation Instructions:

1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.**
2. Assemble the Connecting Rods (H) according to your desired height of your chandelier, and then fix it onto the Chandelier Fixture (I).
3. Gently pull existing wires out from the ceiling junction box and allow them to hang. The hot or live wire is black and the neutral wire is white. Check to see if there is a ground wire that is either green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about ½ inch of insulation from each wire. Carefully inspect the fixture's wires. If you have any doubts and cannot identify the power-supply wires with confidence, then we recommend that you ask an electrician and that you not continue with the installation.
4. Attach the Mounting Bracket (B) to the ceiling outlet box using the enclosed Mounting Screws (C) and tighten with screwdriver. Attach the Canopy holder with threaded tube (E) through the hole of the Canopy (D) and the center hole of Mounting Bracket (B). Thread the wires through the center hole on the Canopy holder with threaded tube (E).
5. Establish electrical connections:
  - a) Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION ON BOX WIRE (usually white or ribbed insulation). Fasten each together with a Plastic wire connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
  - b) Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black or smooth insulation). Fasten each together with a Plastic wire connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
6. After all connections are made, tuck all wiring into the ceiling junction box. Cover the junction box with the Canopy (D), then lock with the Lock Ring (F). Attach the Q-Link (G) to the Canopy holder (E), then insert the Connecting Rods (H) with the Chandelier Fixture (I) to the Q-Link (G).
7. If needed detach the Bottom Bowl (K) from the fixture junction box by turning the bowl clockwise. Insert Four (4) **40 watt max E26 medium base bulb** (not included) into the socket. Put back the Bottom bowl (K) onto the fixture junction box by turning the Bowl counter clockwise. **DO NOT EXCEED THE RECOMMENDED WATTAGE.**
8. Restore power to ceiling outlet junction box and test fixture.
9. Installation is complete.

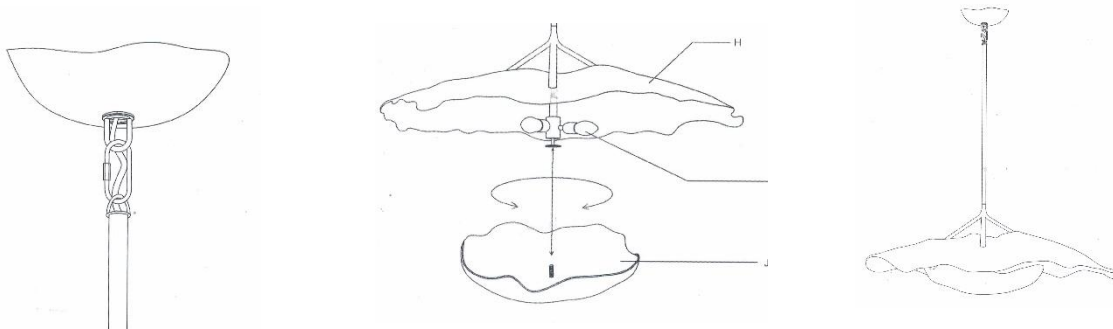

## Care Instructions:

- Do not use abrasive cleaning solution as it may cause damage to the fixture's finish.
- Wipe clean with a soft, dry cloth or static duster.