

# ASSEMBLY INSTRUCTIONS


## ITEM DESCRIPTION:

ITEM NO.: 89101	NAME: Millie Chandelier
MATERIAL TYPE: Glass	FINISH: Clear Seedy
SOCKET TYPE: E26x3/E12x4	SOCKET QTY: 7
BULB WATTAGE: 60W or/CFL 16W or/LED 13W	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 63LBS



## TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Ensure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(a)from the canopy(b)by turning collar loop (c) in
4. Pull the electrical cord of "j box" through the exit hole of the mounting plat.
5. Attached the steel rope(o) to the junction box on the ceiling by the bracket(r), and secure with the strengthen screws(q) as fig. 1. (If the ceiling is wall, you need drill a hole and insert the anchor (s) to the wall first; then repeat above step 6.) Be sure to tighten two screws attached on the coupling(p).
6. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
7. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw(h) into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
8. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
9. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (j) and tighten screws with a screwdriver.
12. Push collar loop (c) in canopy (b) and thread onto nipple in mounting plate (a) by turning in a clockwise.
13. Connect the canopy(b)and collar loop(c) with chain(d) through the loop(e)
14. Connect the lamp body(g)and loop(e) with chains(f)
15. Insert 4 type b 60w bulb (or cfl 12w or led 10w, not included) into the bottom sockets(u) and 3 type a 60w bulb (not included) into the top socket(m). Do not exceed specified wattage.
16. Attached the glass small (l) and glass big(h) to the fixture and secure with glass screw(h). Note: starting at the bottom of the glass.
17. Restore power to the junction box and test fixture.

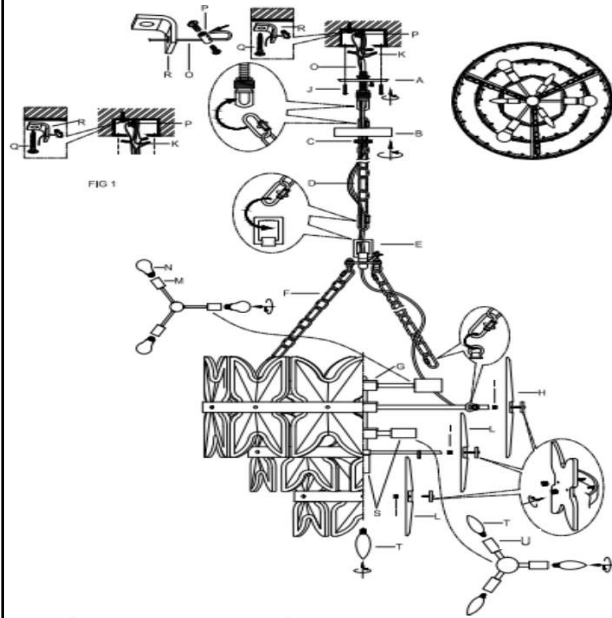

## PARTS INCLUDED:

A) MOUNTING PLATE	1 PC	L) TURN-KNOBS	GLA 15 PCS
B) CANOPY	1 PC	M) E26 SOCKETS	3 PCS
C) COLLAR LOOP	1 PC	N) BULB A (NOT INCL	3 PCS
D1,D2,D3,D4) CHAIN	1 PC	O) STEEL ROPE	1 PC
E) LOOP	1 PC	P) COUPLING	1 PC
F) CHAINS	3 PCS	Q) STRENGTHEN SCf	1 PC
G) LAMP BODY	1 PC	R) BRACKET	1 PC
H) GLASS(BIG)	12 PCS	U) E12 SOCKETS	4 PCS
I) GLASS SCREWS	54 PCS		

## HARDWARE INCLUDED:

K) Plastic Wire Connector	Allen Wrench
J) Mounting Screws	Green Ground Screw

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS