

# ASSEMBLY INSTRUCTIONS


## ITEM DESCRIPTION:

ITEM NO.: 89330	NAME: Troon Chandelier
MATERIAL TYPE: Steel/Glass	FINISH: Antique Brass/Opal Swirl
SOCKET TYPE: E12	SOCKET QTY: 12
BULB WATTAGE: 40W/10W CFL/9W LED	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 25.5LBS



## TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Please be sure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(a) from the canopy(b) by loose 2pcs screw cap (i)
4. Screw the rod(c3) to the main body(d) and tighten the hexangular screw in the side desired hole by Allen wrench(n) and screw the rod (c1) and (c2). Repeat the same operation on the rods on another side.
5. As fig 1, unscrew the screw ring (h) off the socket assembly(g), insert type g 25w bulb (or suitable cfl 7w/led 5w ,not included) in the socket, then attach the glass sphere(e) to the socket properly, then screw the screw ring (h) to secure the glass sphere till tight. Repeat the above operation the remaining 2pcs small glass sphere(e1), 6pcs med glass sphere(e2) and 3pcs large glass sphere(e3) pls note install the glass sphere size large, medium, and small based on the stickers on the label on the socket assembly(g)
6. Screw crystal ball(f) on the main body(e) till tight. Repeat the same operation on the remaining 12pcs crystal ball.
7. Insert the rod(c1) to the canopy(b) and tighten it by using metal washer(k) and screw nut(j). Pass through the cord as drawing show. Repeat operation on another side.
8. Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
9. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green) or bare wire). Fasten each together with a plastic wire connector (l) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw it is imperative that the outlet box in your home be properly grounded.
10. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (l) and wrap the connection with electrical tape. Be sure no strands are exposed.
11. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (l) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
12. Gently truck the wire connections neatly into the ceiling junction box.
13. Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (m) and tighten screws with a screwdriver.
14. If attach to cement ceiling, use anchor(o) first then screw strengthened screws(p) into the anchor.
15. If attach to wood ceiling, thread strengthened screw(p) directly into ceiling.
16. Push mounting plate(a) in canopy (b) and thread 2pcs screw cap(i) till tight. Be sure all the hexangular screws were tight enough.
17. Restore power to the junction box and test fixture.

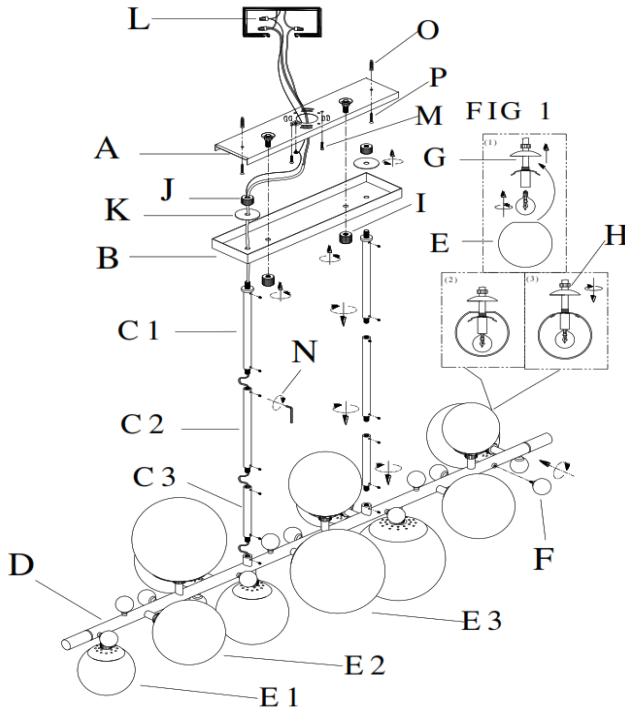

## PARTS INCLUDED:

A MOUNTING PLATE	1 PC	G SOCKET ASSEMBL	12 PCS
B CANOPY	1 PC	H SCREW RING	12 PCS
C RODS	6 PCS	U SCREW CAP	2 PCS
D BODY	1 PC	J SCREW NUT	2 PCS
E GLASS SPHERE	12 PCS	K METAL WASHER	2 PCS
F CRYSTAL BALL	13 PCS		

## HARDWARE INCLUDED:

L Plastic Wire Connector	2 Pcs	N Allen Wrench	1 Pc
M Mounting Screws	2 Pc	Green Ground Screw	1 Pc
P Strengthened Screw	2 Pc	O Anchor	

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS