

# Palma Wall

TW1091 | 1.0

## GENERATION LIGHTING WALL

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


**SAVE THESE INSTRUCTIONS!**

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

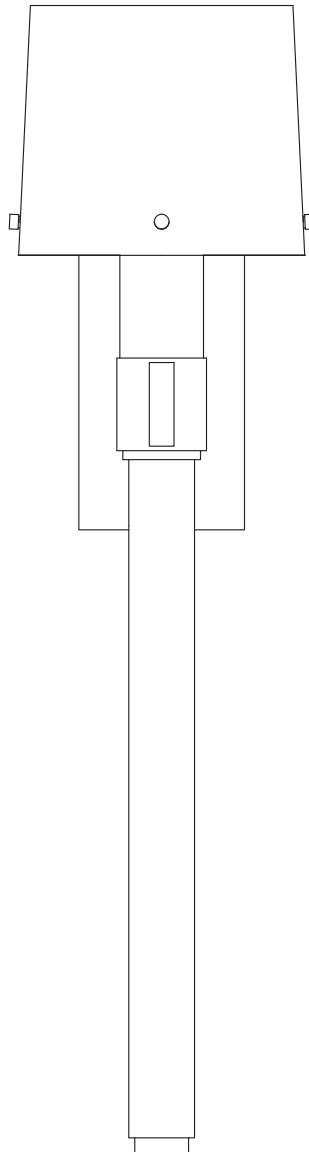

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

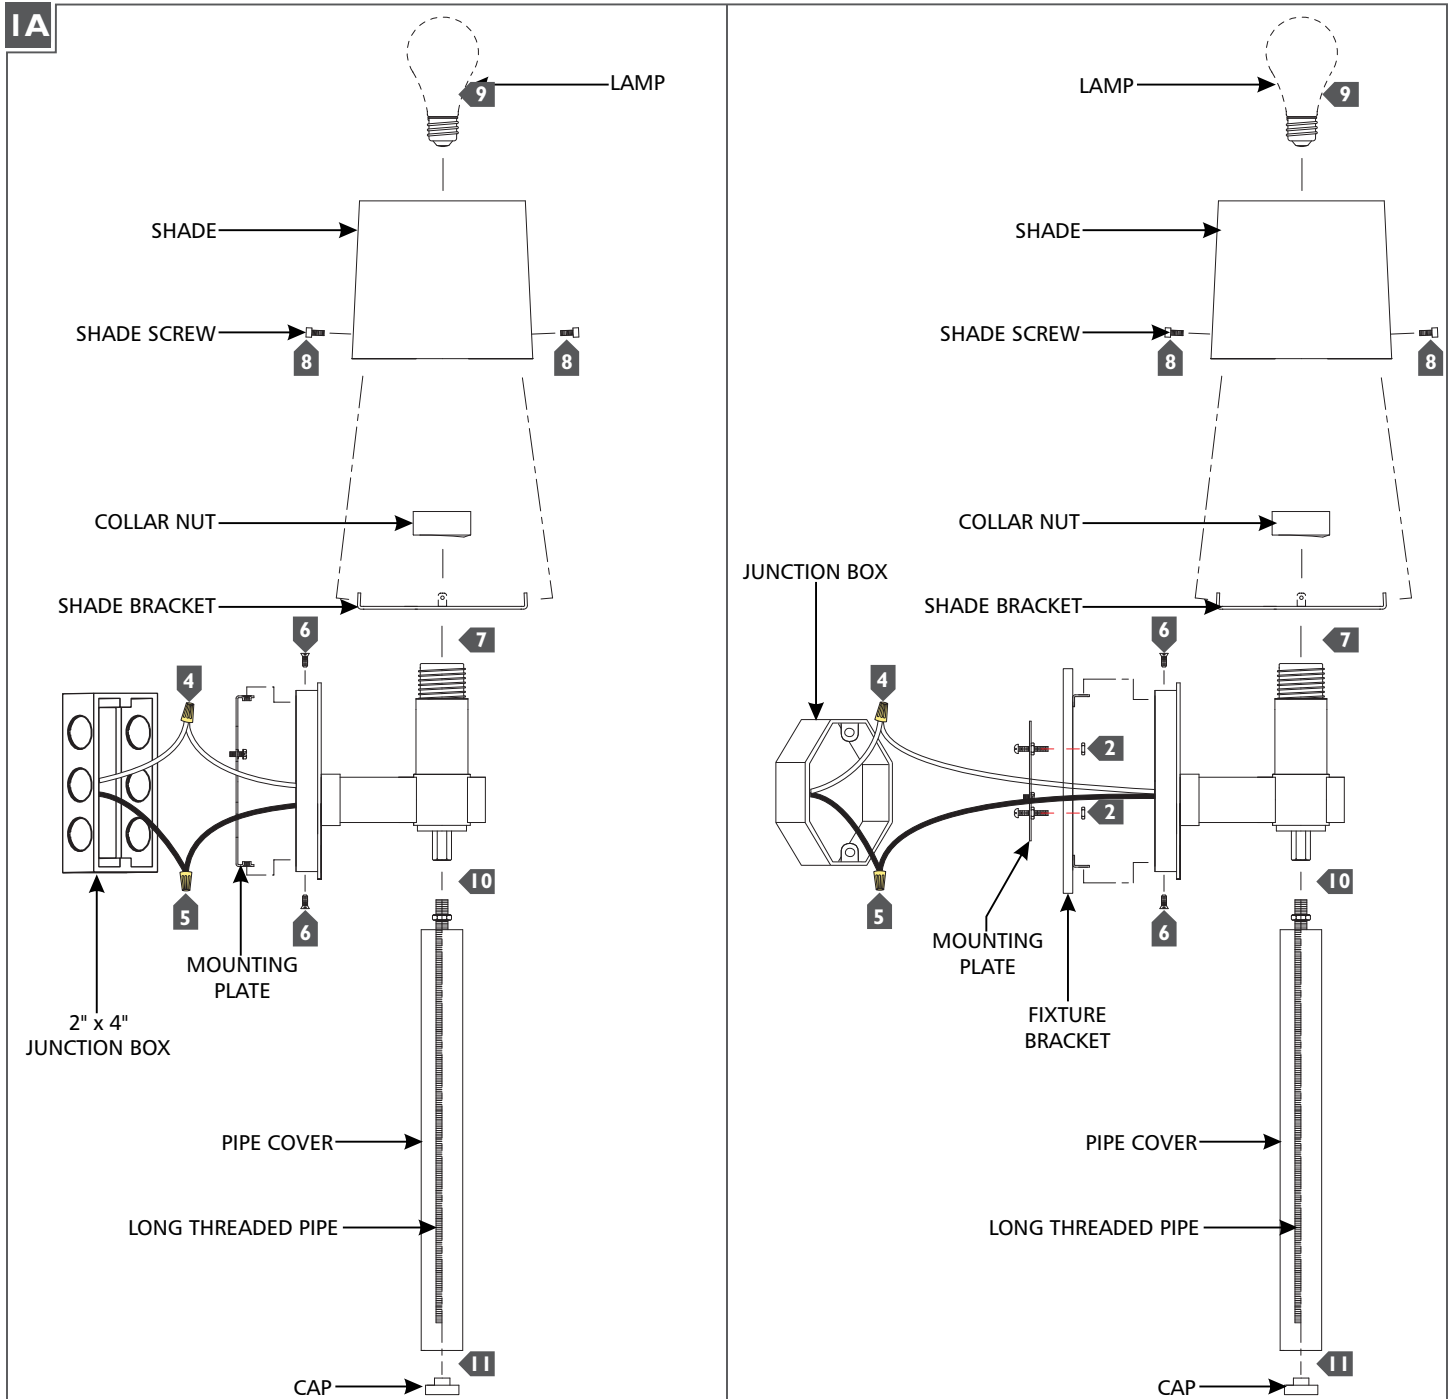

- I** Secure the mounting plate to the junction box.
- 2** **For Standard Junction Box Only:** Place the fixture bracket onto the mounting studs and secure in place using the hex nuts.
- 3** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate/fixture bracket, and secure it in place using the fixture screws.
- 7** Install the shade bracket onto the socket and secure it in place by screwing the shade collar nut onto the socket.
- 8** Install the shade by aligning the holes on the shade with the holes on the bracket, then secure in place using the shade screws.
- 9** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 10** Screw the long threaded pipe to the bottom of the fixture.
- 11** Place the pipe cover over the pipe and secure it in place by screwing the cap tightly onto the bottom of the fixture.