


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: 89481	NAME: Maser Chandelier
MATERIAL TYPE: Steel/Glass	FINISH: Antique Brass/Frosted Swirl
SOCKET TYPE: Integrated LED	SOCKET QTY: 18
BULB WATTAGE: 18W LED/3000K	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 18.5LBS

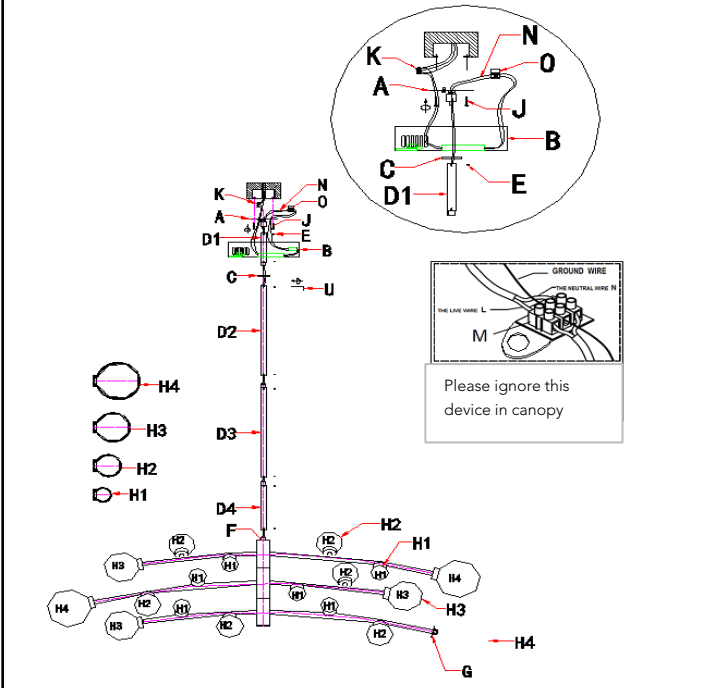

PARTS INCLUDED:

A MOUNTING PLATE	1PC	H1 GLASS SHADE 1	3 PCS
B CANOPY	1PC	H 2 GLASS SHADE 2	3 PCS
C COLLAR LOOP	1 PC	H3 GLASS SHADE 3	6 PCS
D1-4 RODS	8 PC	H4 GLASS SHADE 4	6 PCS
E HEX SCREWS	2 PCS	O 2-WIRE TERMINAL	1 PC
F LAMP BODY	1PC	N POWER CABLE	1 PC
G MODULE	18 PCS		

HARDWARE INCLUDED:

K Plastic Wire Connector	U Allen Wrench
J Mounting Screws	S Wrench
Green Ground Screw	

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Remove all packing contents and parts from the carton(s) carefully. Ensure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Screw the rod(d4) to lamp body(f) till tight, repeat the same operation on the rod(d1), rod(d2) and rod(d3) when you connect the small hex screws(e) in the side hole first then tighten with Allen wrench(u) after all rods are connected. Be sure all the hexangular screws are tight enough.
4. Put the canopy (b) into the rod (d1) to connect to the mounting plate (a).
5. Pull the electrical cord of "j-box" through the exit hole of the mounting plate(a).
6. Please pay special attention that you do not need to connect the wire connect device(m). It is used for the wire connection for euro-market.
7. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. the bare silver wire is the grounded wire.
8. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
9. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
10. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
11. Connect the lamp input power cable(n) (usually black and white wire, according to the principle of connecting the black wire to the + pole and the white wire to the -pole) to the 2-wire terminal (o), and then cover the 2-wire terminal (o) cap.
12. Gently tuck the wire connections neatly into the junction box.
13. Attach the mounting plate (a) to the ceiling outlet box using the enclosed mounting screws (j) and tighten screws(j) with a screwdriver.
14. Push collar loop(c) in canopy (b) and thread onto the nipple in mounting plate (a) by turning in a clockwise direction.
15. Attach the glass (h1), the glass (h2), the glass(h3), and the glass (h4) on the socket(g) in turn and repeat the same operations on the other glass.
16. For non-user replaceable light sources: the light source contained in this luminaire shall only be replace by the manufacturer or his service agent or a similar qualified person.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS