

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:


ITEM NO.: 49269 NAME: Tarbell Semi-Flush

MATERIAL TYPE: Steel FINISH: Polished Nickel

SOCKET TYPE: E12 SOCKET QTY: 3

BULB WATTAGE: 40W or/CFL 10W or/LED 9W

VOLTAGE: 110-120 V ITEM NET WEIGHT: 8LBS

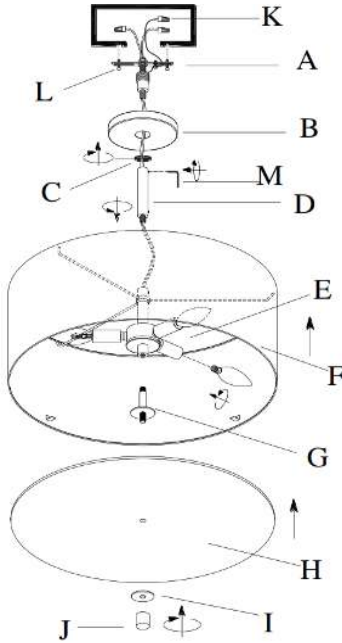

## PARTS INCLUDED:

(A) Mounting Plate	Qty: 1	(F) Metal Shade	Qty: 1
(B) Canopy	Qty: 1	(G) Pipe	Qty: 1
(C) Collar Loop	Qty: 1	(H) Diffuser	Qty: 1
(D) Rod	Qty: 1	(I) Washer	Qty: 1
(E) Socket Assembly	Qty: 1	(J) Finial	Qty: 1

## HARDWARE INCLUDED:

(K) Plastic Wire Connectc	2 Pc	(M) Allen Wrench	1 Pc
(J) Mounting Screws	2 Pcs		

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



## TO ASSEMBLE:

- Carefully remove all packing contents from the carton(s) and packaging.
- Ensure you have all parts indicated before you begin assembly.
- Shut off the main electrical supply from the main fuse box/circuit breaker.
- Remove the mounting plate(a)from the canopy(b)by turning collar loop (c) in a counterclockwise direction.
- Screw the rod(d) to the top of metal shade (f) and tighten the hexangular screw in the side desire hole by Allen wrench(m).
- Thread the pipe(g) to the bottom of socket assembly (e) till tight.
- Lift the acrylic diffuser(h) in the bottom rim of metal shade properly, and cover the washer(i), and then tight the finial(j) to secure it.
- Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
- Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green) or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
- Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
- Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
- Gently tuck the wire connections neatly into the ceiling junction box.
- Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (l) and tighten screws with a screwdriver.
- Push collar loop in canopy (b) and thread onto nipple in mounting plate (a) by turning in a clockwise
- Screw rod (d) to canopy (b), using hexangular screw and Allen wrench(m) be sure all the hexangular screws are tight enough.
- Insert 3 type b 40w bulbs (or suitable /cfl 10w or/led 9w bulbs, not included) in the sockets.do not exceed specified wattage. Restore power to the junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS

