

tala®

US 

Installation Guide

BOWER PENDANT LIGHT

Thoughtful lighting, responsibly designed in London.

Thank you for making the switch to Tala.
Discover the full Tala family at us.tala.co.uk

BEFORE STARTING

We advise the fitting of our ceiling rose and pendant to be performed by a qualified electrician. Please read through these instructions before commencing work, and keep them for future reference. Please take extreme care when carrying out these instructions.

IMPORTANT

This light fitting must be connected to the supply earth. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility. This light fitting is suitable for indoor use only. This fitting operates on 120V mains voltage. Please visit our website to see our recommended dimmers.


WARNING

Always switch off electricity supply at the mains during installation and maintenance. We recommend that the fuse is withdrawn or the circuit breaker is switched off whilst work is in progress. Do not just turn off at the wall switch. All fittings must be installed in accordance with current NFPA 70, National Electrical Code (NEC).

RECOMMENDED EQUIPMENT

- Screwdriver
- Wire strippers
- Insulation tape

Further equipment may be required for fixing to your ceiling

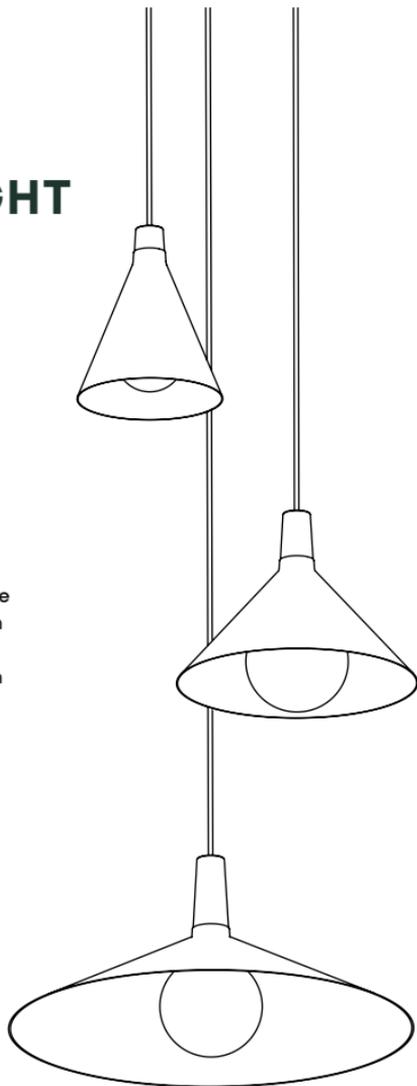

FOR INDOOR USE ONLY

SKU - BWR-PD-LRG-AA-XX-01-US

SKU - BWR-PD-MED-AA-XX-01-US

SKU - BWR-PD-SML-AA-XX-01-US




110 - 120V



Intertek
5018709

Pendant Light Components


- (A) x1 Ceiling Rose with Cable and Pendant
- (B) x1 Ceiling Bracket
- (C) x1 Shade
- (D) x2 Bolts M4
- (E) Screws and Rawl plugs

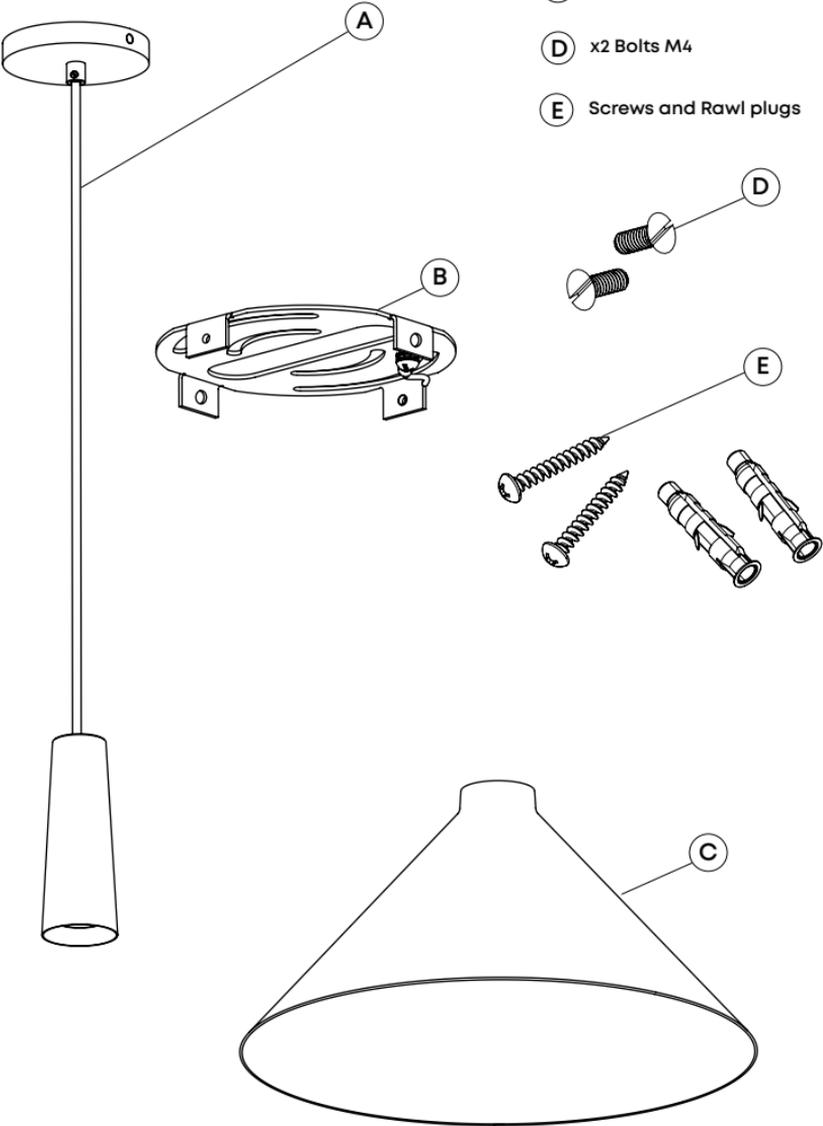

STEP 1


Remove the junction box from the end of the cable, retain this for the later steps.

Loosen the grub screw ① and remove the cable ②.

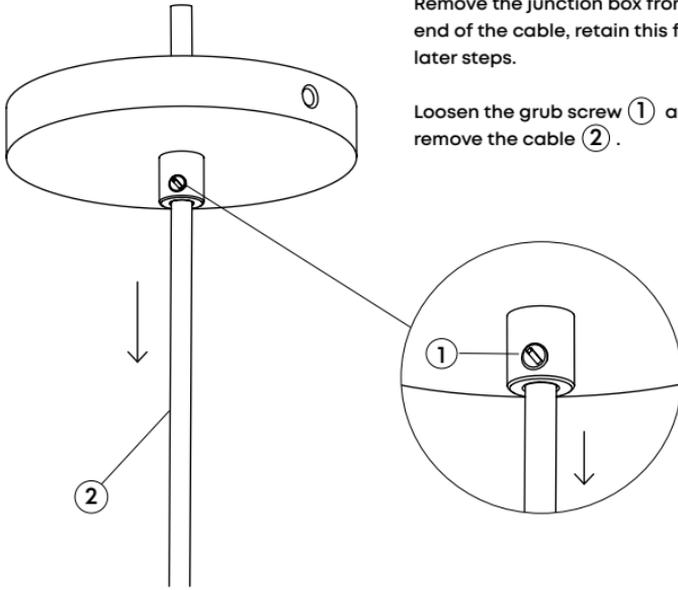


STEP 2

Slide the Shade ③ along the cable to sit securely on the pendant.

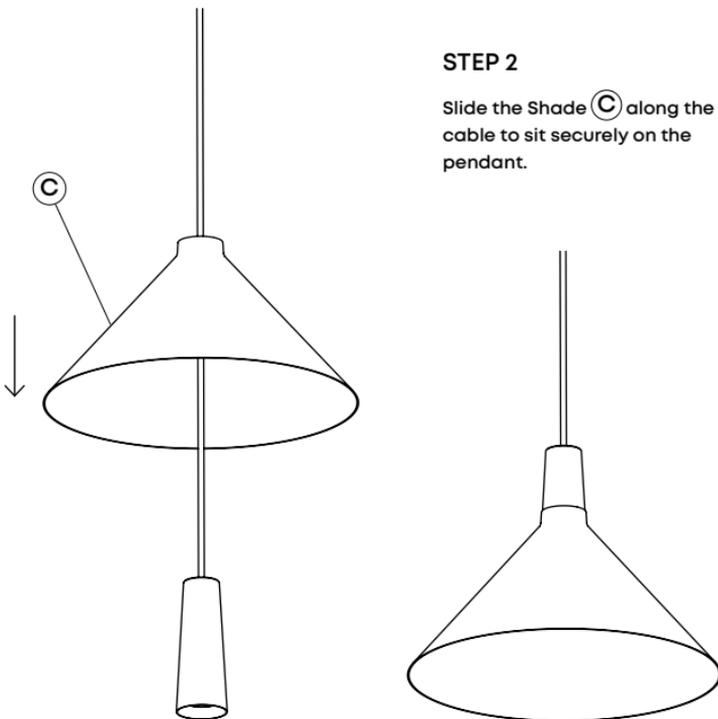


Mains supply

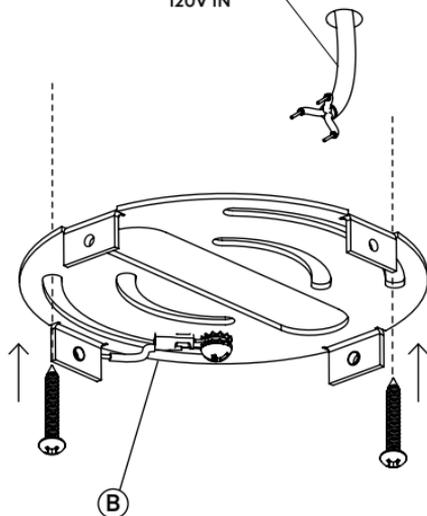

STEP 3

Attach **(B)** to the ceiling using screws and plugs.

Always choose screws and plugs that are appropriate for the ceiling.

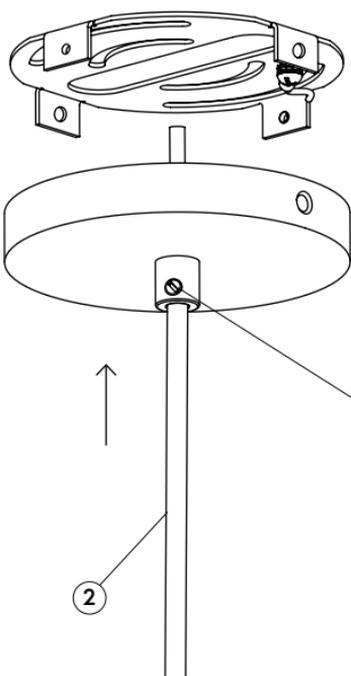

STEP 4

Return the cable **(2)** through the ceiling rose. Adjust to your desired length and trim if necessary.


Using a flat head screw driver, tighten grub screw **(1)**. This will secure the cable in place. Maintain all double insulation.

STEP 5

First identify your household wiring using current NFPA 70, National Electrical Code (NEC).


Attach the pendant wiring to your household supply as shown.

Use an appropriate junction box.

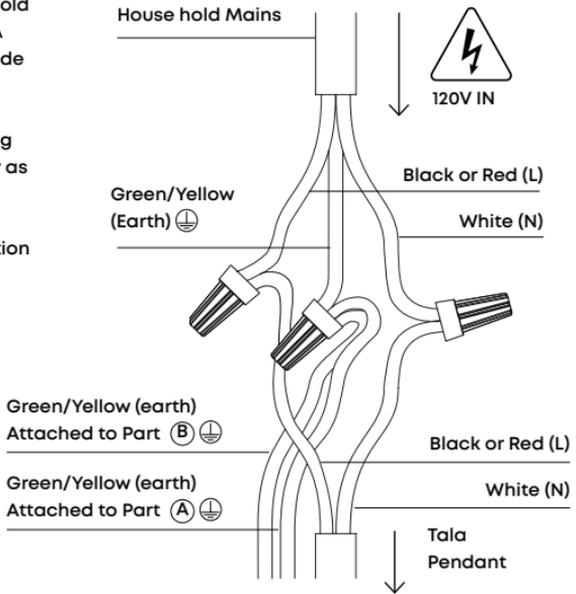


STEP 6

Fasten (A) onto (B) using the bolts provided (D).

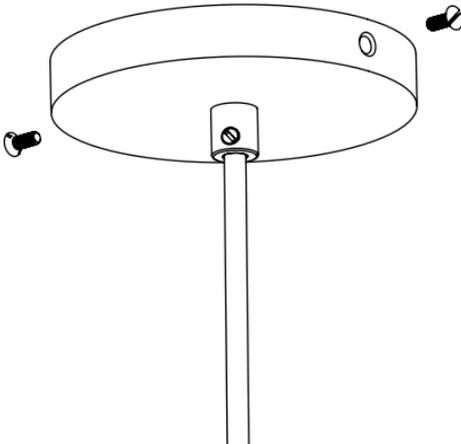

STEP 7

Insert your bulb into the lampholder and rotate clockwise until tight. Take care not to over tighten to avoid breakage.

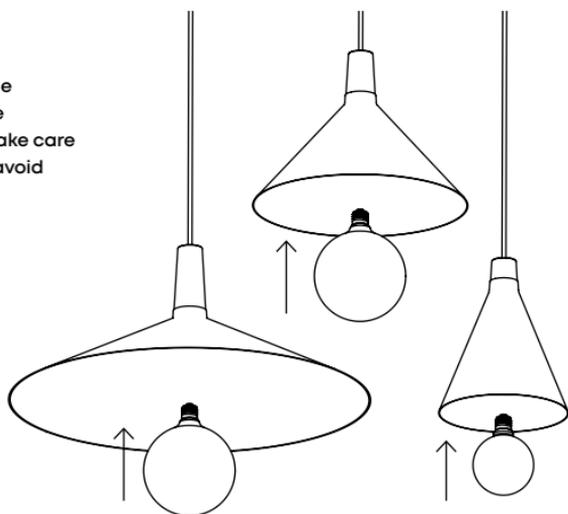

WARRANTY AND AFTER-CARE

This product has a two-year warranty. If there appears to be a functional defect with the product during this time, please contact our team at customerservice@tala.co.uk.

Please note, the flexible cable attached to this luminaire cannot be replaced; if the cable is damaged, recycle the luminaire and seek a replacement.

Join the Community

Instagram: @tala | Facebook: talaHQ | Pinterest: TalaLED | Tag: lighttoliveby

Tala Energy Ltd. 25B Vyner Street, London E2 9DG | hello@tala.co.uk

Tala North America, Inc. 909 Rose Avenue, Suite 660 North Bethesda, MD 20852,
United States | www.tala.co.uk