

- BN Bright Nickel GV Galvanized
- DB Dark Bronze

MP Maple MG Mahogany

Nickel

Silver

Black

NK

SV

ΒK

Dimensions

# Specifications

- 153mm x 18mm AC motor with reverse switch on fan body
- Stamped and spun steel construction
- 50" span, plywood blades
- Optional LED Light: 17W, 90 CRI, 3000K, 1600 lumens (dimmable) behind an opal glass diffuser; adds 3.5" to length of fan; CA Title 24, JA8-2019 compliant
- For flat ceilings only
- Designed by Ron Rezek
- ETL listed for dry and damp locations
- Weight: 16 lbs (7.3 kgs)

## Performance Data LOWEST SPEED RPM: 70

552 17W LED

CFM: 1,471 Watts: 11.13 CFM/W: 132

HIGHEST SPEED

**RPM:** 190 **CFM:** 4,719 **Watts:** 59.64 **CFM/W:** 79

# Energy Guide Data

002 Fan & Light - 3 Wire

**004** Fan & Light - 2 Wire**005** Wall/Remote Combo

003 Handheld Remote

Average Energy Use 38 Watts


Average Airflow 3,196 CFM

Yearly Energy Cost \$11

Average Efficiency 85 CFM/Watt

Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

The Modern Fan Co. tel 541-482-8545 toll free 888-588-3267 email info@modernfan.com website modernfan.com

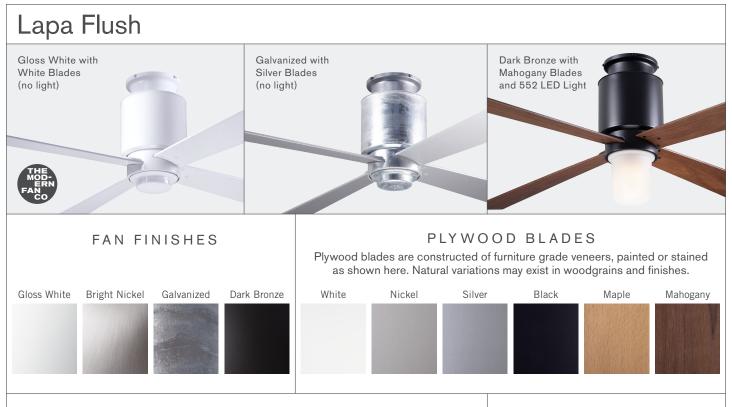

## LAPA FLUSH FAN CONTROLS

Selection of a control option is made at time of order and incorporated into the fan item number (except #FC-009A and #FC-009B which are sold as accessory items).

		L
2		L
1	)	

### #FC-001 Fan Speed Only Control

(no light) For a single AC fan, providing four speeds. Not intended for a fan with light. Note: Not compatible with remote control.



#### **#FC-003-LED** Handheld Remote RF Control

Designed for independent operation a single AC fan or AC fan with LED light, providing three speeds and full range dimming (or "on/off" switching), using only one circuit (two wires). Includes RF handset, receiver, battery and comes with a wall mounting bracket for handset.



### #FC-005-LED Wall/Remote Combo RF Control-2 Wire

Designed for independent operation of a single AC fan or AC fan with LED light, providing three speeds and full range dimming (or "on/ off" switching), using only one circuit (two wires). Includes RF handset, RF wall control (with master power switch), switch plate and receiver.





### Fan & Light Control–3 Wire For a single AC fan with LED light,

#FC-002

providing four speeds and dimming function. Requires three wires from switch location to fan. *Note: Not compatible with remote control.* 

#### **#FC-004-LED** Fan & Light RF Control–2 Wire

Designed for independent operation of a single AC fan or AC fan with LED light, providing three speeds and full range dimming (or "on/off" switching), using only one circuit (two wires). Includes RF wall control (with master power switch), switch plate and receiver.

#### #FC-009A / #FC-009B Multi-fan Speed Controls for AC Fans (no lights)

Sold as an accessory item, providing three speeds for multiple AC fans on a single switch leg. FC-009A for 2-3 fans FC-009B for 3-6 fans

Note: Not compatible with remote control. Control of fan lights must be accounted for separately with owner provided control on separate switch leg.

# MOUNTING

The Lapa Flush installs with a flat mounting plate (included) for attachment to an appropriately rated junction box.

The Lapa Flush is intended for flat, low ceilings (approximately 8'0"). For higher ceilings and/or for sloped ceilings, please select from one of our down rod suspended models.

The Modern Fan Co. tel 541-482-8545 toll free 888-588-3267 email info@modernfan.com website modernfan.com