

H417701 JENNA PENDANT

ASSEMBLY AND MOUNTING INSTRUCTIONS

GENERAL

- WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOUILD BE COMPLETED BY A LICENSED ELECTRICAN
- FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.

- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

INSTALLATION

SIEP 1.	and mounting plate until you desired hanging height is met.	STEP 6.	Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could
STEP 2.	Tie an overhand knot to secure wire in place above the		cause a dangerous short circuit.
	nipple, and trim off excess wire to min 6" beyond the knot.		FAILURE TO CONNECT THE APPROPRIATE WIRES
	Strip each wire end 5/8"		CORRECTLY COULD RESULT IN SEROIUS INJURY OR
STEP 3.	Attach the mounting plate to the outlet box using the		DEATH!
	mounting screws.	STEP 7.	Carefully place wires into Outlet Box.
STEP 4.	Fasten bare ground wire to ground wire from the wall outlet	STEP 8.	Place the canopy with the fixture over the outlet box and
	box (usually green or copper color) or connect ground wire		fasten it by the screw collar.
	to green screw on the mounting plate.	STEP 9.	Install the lamp. The fixture is rated for 60 watt G40 lamp.
STEP 5.	Connect the neutral (white) fixture wire coming from the		DO NOT EXCEED RECOMMENDED WATTAGE!
	fixture base to neutral (usually white) outlet wire. Fasten	STEP 10.	Attach the glass to the socket then secure with ball nuts.
	both wires together with a plastic wire nut and tightly wrap	STEP 11.	Restore power to the circuit at breaker or fuse box

DIMMING

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

the wire nut with electrical tape.

provided by your local electrical distributor, home center, or hardware


CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.





ASSEMBLY AND MOUNTING DIAGRAM

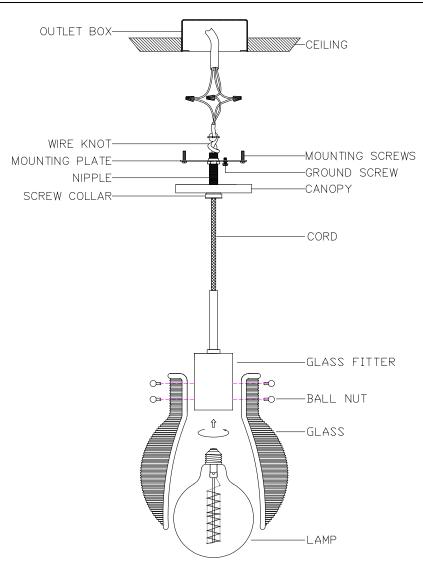

WIRE NUT/TAPING DIAGRAM

