

The uniquely modern Revel outdoor bollard features a sleek metal surface that is laser-cut with horizontal slots which allow the LED light to shine through an inner white diffuser. The subtle, ambient glow enhances wayfinding on paths or in landscape applications.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	125.2
WATTS	18.9
VOLTAGE	Universal 120V, 277V, with integral transient 2.5kV surge protection
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 60,000 Hours
WARRANTY*	5 Years
WEIGHT	10.1 lbs.

* Visit techlighting.com for specific warranty limitations and details.
 **Bollard base not suitable for branch circuit through wiring.




REVEL BOLLARD
shown in bronze



REVEL BOLLARD
shown in charcoal

ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
7000BRVL	830 80 CRI, 3000K 840 80 CRI, 4000K	42 42"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE

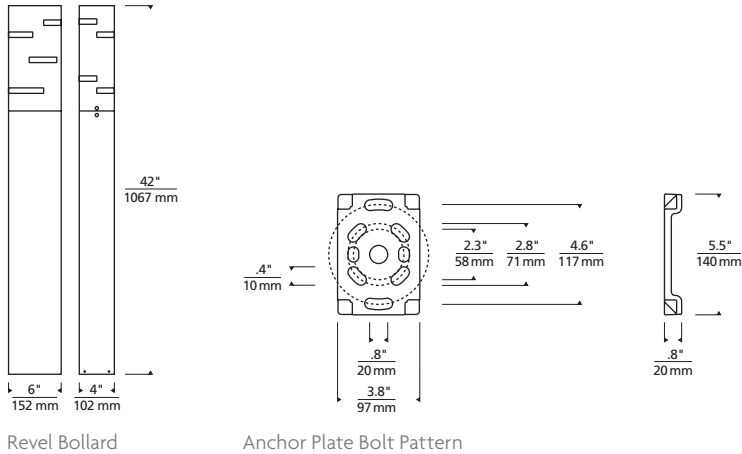


PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

REVEL BOLLARD

- Total Lumen Output: 125.2
- Total Power: 18.9
- Luminaire Efficacy: 6.6
- Color Temp: 4000K
- CRI: 80+
- BUG Rating: B0-U2-G0

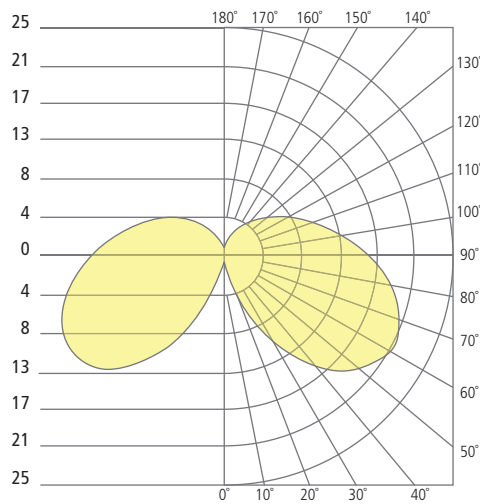

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
