

Clean, modern design and outstanding light performance distinguish Taag high output LED wall packs. Designed for outdoor security and general illumination, Taag 10 wall pack delivers over 8800 lumens of light performance in commercial and residential applications for which powerful illumination is required.

Outstanding protection against the elements:

- Powder coat finishes
- Impact-resistant, UV stabilized frosted acrylic lensing

Taag 10 delivers over 8800 lumens for maximum illumination and security with Type III or Type IV light distribution

SPECIFICATIONS

| | |
|-----------------------|---|
| DELIVERED LUMENS | 8889 |
| WATTS | 77 |
| VOLTAGE | Universal 120V, 277V, with integral transient 2.5kV surge protection |
| DIMMING | 0-10 |
| LIGHT DISTRIBUTION | Type III, Type IV |
| MOUNTING OPTIONS | Wall |
| PERFORMANCE OPTIONS | Photocontrol / In-Line Fuse / Surge Protector |
| CCT | 3000K or 4000K |
| CRI | 80+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B2-U1-G2 |
| DARK SKY | Compliant |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL |
| CALIFORNIA TITLE 24 | Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | Yes |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Powder Coat |
| LED LIFETIME | L70; >60,000 Hours |
| WARRANTY* | 5 Years |
| WEIGHT | 12.5 lbs. |



TAAG 10
shown in bronze




TAAG 10
shown in charcoal

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

| PRODUCT | CRI/CCT | LENGTH | LENS | FINISH | VOLTAGE | DISTRIBUTION | OPTIONS |
|-----------------|--|---------------|----------------|--------------------------------------|----------------------|--|--|
| 7000WTAG | 830 80 CRI, 3000K 840 80 CRI, 4000K | 10 10" | C CLEAR | Z BRONZE H CHARCOAL | UNV 120V-277V | 3 TYPE 3 DISTRIBUTION 4 TYPE 4 DISTRIBUTION | NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION IN-LINE FUSE & SURGE PROTECTION BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION |

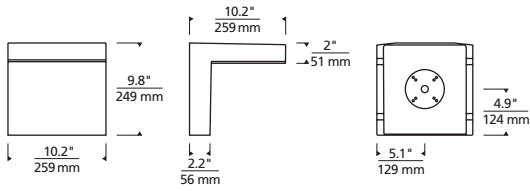

Taag 10

PHOTOMETRICS*



*For latest photometrics, please visit www.techlighting.com/OUTDOOR

TAAG 10 TYPE 3 DISTRIBUTION

| | |
|---------------------|----------|
| Total Lumen Output: | 8889 |
| Total Power: | 77 |
| Luminaire Efficacy: | 115 |
| Color Temp: | 4000K |
| CRI: | 80+ |
| BUG Rating: | B2-U1-G2 |

TAAG 10 TYPE 4 DISTRIBUTION

| | |
|---------------------|----------|
| Total Lumen Output: | 8873 |
| Total Power: | 76 |
| Luminaire Efficacy: | 117 |
| Color Temp: | 4000K |
| CRI: | 80+ |
| BUG Rating: | B2-U1-G2 |

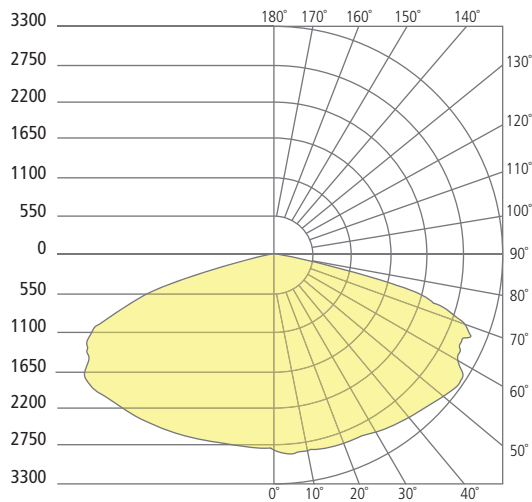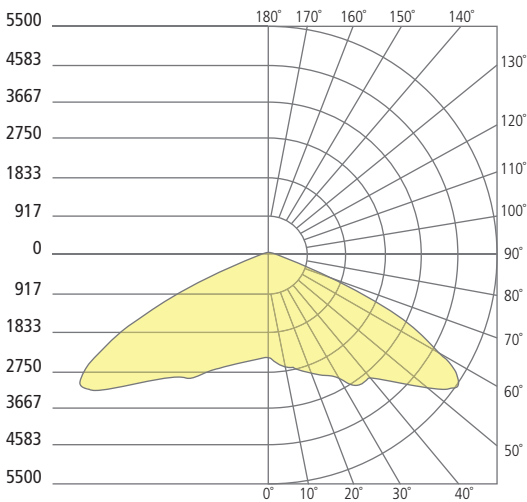

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

TECH LIGHTING

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400