

STAGGER WALL

MDOWS528B270B; MDOWS527B270B; MDOWS526B270B; MDOWS525B270B

General Product Information

 <p>ETL US LISTED Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>OUTDOOR</p>	 <p>WET LOCATION SAFE</p>
 <p>DIMMABLE</p>	 <p>INTEGRATED LED NO BULBS REQUIRED</p>	 <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>
 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>Product Warranty</p>	 <p>FCC Statement</p>	

Tools Required

 <p>PHILLIPS-HEAD SCREWDRIVER</p>	 <p>WIRE CUTTER</p>	 <p>ALLEN WRENCH</p>	 <p>ELECTRIC DRILL</p>
 <p>CAULK GUN</p>			

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. LED
- B. Mounting Plate
- C. Mounting Screws and Anchors
- D. Fixture Wires
- E. Ground Wire
- F. Driver
- G. #8-32 Screws
- H. Wire Nuts
- I. Fixture Base
- J. Cord Exit Hole

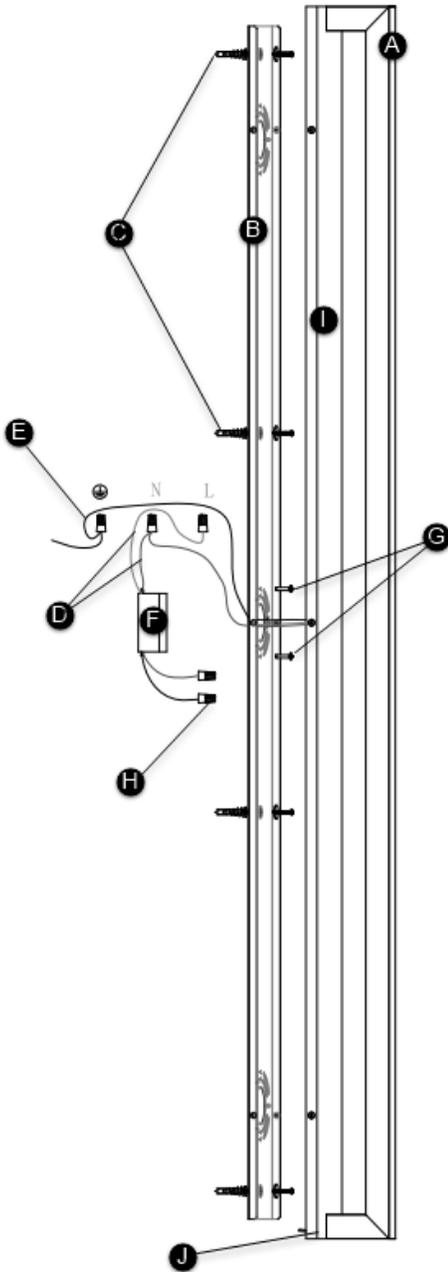

INSTRUCTIONS

1. Connect the fixture to a suitable ground in accordance with local electrical codes.
2. Connect the white input driver wire to the neutral power line with a wire nut.
3. Connect the black input driver wire to the hot power line with a wire nut.
4. Properly place the driver/wire nut connections into the junction box and install the mounting plate to the junction box with the two provided #8-32 screws.
5. Feed the fixture wires through the fixture base, then secure the lower arm to the fixture base with the Allen screw using the provided Allen wrench.
6. Feed the fixture wires through the mounting plate.
7. Drill an appropriately sized hole and install the anchor into the wall.
8. Place the mounting plate on the wall over the anchor and secure it in place with the anchor screws.
9. Connect the negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
10. Connect the positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
11. Properly place the wire nut connections into the junction box, install the mounting plate with the provided mounting screws.
12. Place the arm on the wall where the junction box is located.
13. Make sure the arm is leveled and mark the top of the arm location.

14. Install the fixture base onto the mounting plate and secure it in place with the Allen screws using the provided Allen wrench. Secure the upper arm to the insert with the Allen screw using the provided Allen wrench.
15. For wet locations, caulk around the base of the fixture as well as the cord exit hole with a waterproof construction sealant.