
ASSEMBLY INSTRUCTIONS

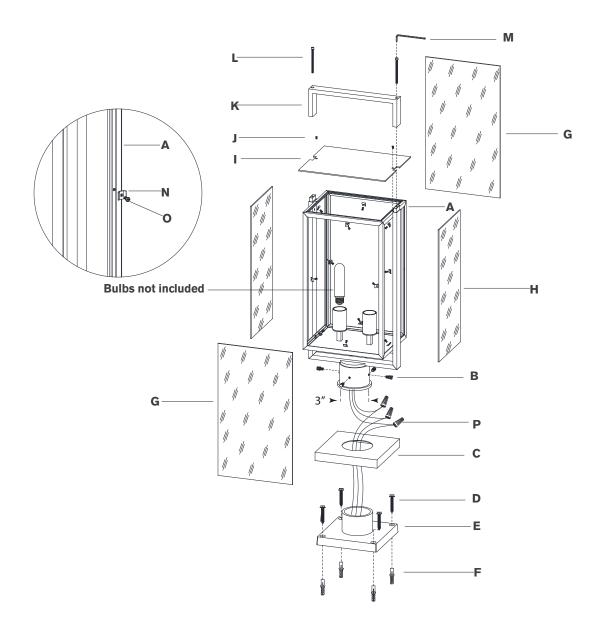

Halle Medium Post Lantern

Item # S 7191

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Drill
Hammer Pencil


- 1. Carefully remove all parts from the box. Place on a clean, soft surface.
- 2. Using the post **(E)** as a guide, line up with the wall and mark anchor positions.
- 3. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(F)** into the holes using hammer.
- 4. Install post (E) to wall and secure wood screws (D) to anchors (F).
- 5. Remove bracket **(K)** from fixture **(A)** by unscrewing screws **(L)** using provided allen wrench **(M)**.
- 6. Remove metal plate (I) from fixture (A) by unscrewing set screws (J).
- 7. Remove metal bars **(N)** from fixture **(J)** by removing screws **(O)**. Then install glass panels **(G)** & **(H)** to fixture **(A)** and secure with metal tabs **(N)** and screws **(O)**.
- 8. Install light bulbs into the sockets.
- 9. Install metal plate (I) to fixture (A) and secure with set screws (J).
- 10. Install bracket **(K)** to fixture **(A)** and secure with secures **(L)** using provided allen wrench **(M)**.
- Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (P).
 - **NOTE:** It is imperative that the fixture is grounded.
- 12. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(P)**.







ASSEMBLY INSTRUCTIONS

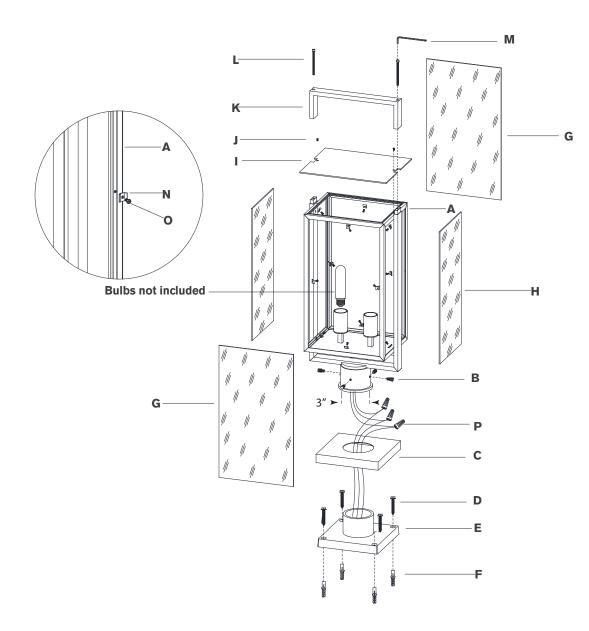

Halle Medium Post Lantern

Item # S 7191

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

13. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(P)**.

CAUTION: Do not reverse the hot and neutral connections.

- 14. Make sure all wire connections are tight, then carefully tuck into the fixture base.
- 15. Install fixture to post (E) and secure with screws (B).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.



