
ASSEMBLY INSTRUCTIONS



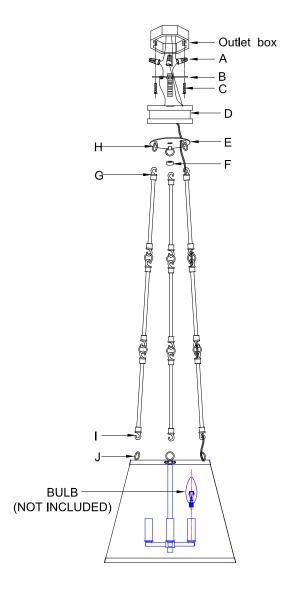

Item # AH5210

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Install the crossbar (B) to outlet box by using mounting screws (C) provided.
- 2. Pull the cord & ground wire carefully up into the outlet box.
- 3. Separate the two cords carefully and identify the Hot & Neutral wire.
- 4. Attach the ground wire from the fixture (Green or bare copper) to ground wire from outlet box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- Connect the Hot wire from the fixture (Black) to the hot wire from outlet box.
 Fasten them together with the wire nut (A)
- 6. Repeat this procedure for the White neutral wire from the light fixture to the wire from outlet box.
 - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS
 OTHERWISE SAFETY WILL BE COMPROMISED
- 7. Tuck these wire connections neatly into canopy (D) to secure.
- 8. Put metal plate (E) into canopy (D), and secure them onto the threaded nipple with finial (F).
- 9. Attach the hook (G) to the loop (H). Attach the hook (I) to the loop (J).
- 10. Install the light bulbs (not included) into sockets.
- 11. Installation is complete, turn on power at fuse or circuit breaker.



