

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:




ITEM NO.: 89478 NAME: Maradonna Pendant

MATERIAL TYPE: Steel/Alabaster FINISH: English Bronze/White

SOCKET TYPE: Integrated LED SOCKET QTY: 8

BULB WATTAGE: 3W LED/3000K

VOLTAGE: 110-120 V ITEM NET WEIGHT: 35.5LBS

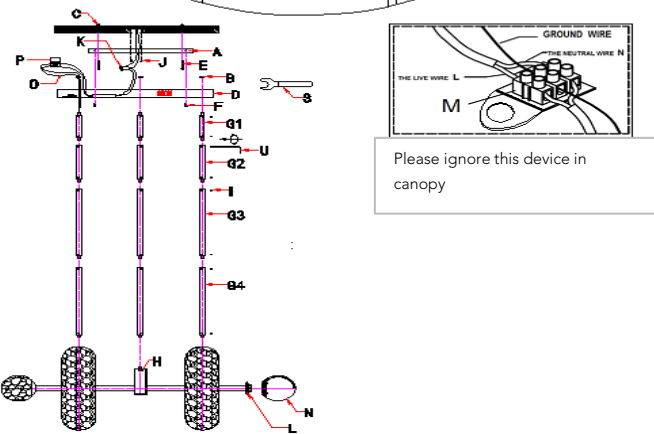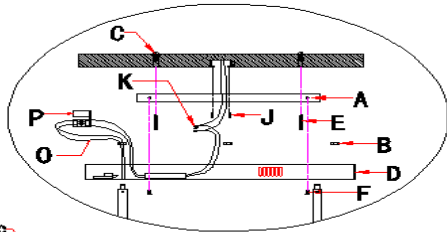

Please ignore this device in canopy

PARTS INCLUDED:

A MOUNTING PLATE	Qty: 1	I HEX SCREWS	24 PCS
B NUTS	Qty: 1	L MODULE	4 PCS
D CANOPY	Qty: 1	N ALABASTER	4 PCS
F SET SCREWS	Qty: 1	O POWER CABLE	1 PC
G RODS	Qty: 1	P 2-WIRE TERMINAL	1 PC
H LAMP BODY	1 PC	Q METAL SHEET	1PC

HARDWARE INCLUDED:

K Plastic Wire Connector	2 Pc	U Allen Wrench	1 Pc
J Mounting Screws	2 Pcs	C Anchor	2 Pc
Green Ground Screw	1 Pc	E Strengthened Screw	3 Pc

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

TO ASSEMBLE:

1. Remove all packing contents and parts from the carton(s) carefully. Ensure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Position fixture in desired location on ceiling. The mounting plate has (2) holes for screw mounting. Mark these spots on the ceiling with a pencil to drill holes. Drill 2 holes on marks and insert anchors(c) into drilled holes.
4. Insert the rod(g4) to lamp body(h) then tighten clockwise direction, repeat operation on the rods g1-3, when you connect the rods, loosen the small hex screws(i) in the side hole first, then tighten with Allen wrench(u) after all rods are connected. Ensure all the hexangular screws are tight enough.
5. Pull the electrical cord from the "j- box" through the mounting plate(a).
6. Please pay special attention that you do not need to connect the wire connect device(m). It is used for the wire connection for euro-market.
7. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare silver wire is the grounded wire.
8. Attach the ground wire from the fixture to the ground j-box wire from the outlet. Fasten together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
9. Connect the neutral fixture wire to the neutral junction box wire. Fasten together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
10. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
11. Gently tuck the wire connections neatly into the junction box.
12. Attach the mounting plate (a) to the ceiling outlet box using the mounting screws (j) and tighten mounting screws(j) with a screwdriver. Then secure mounting plate (a) on the ceiling by inserting 2pcs strengthened screws(e) into the anchor(c) and then tighten strengthened screws (e) with a screwdriver.
13. Put the metal sheet (q) and canopy(d) into the rod (g1) in turn and tighten the hex screw (i) with a wrench (s). Repeat operations (7) on another side.
14. Attach canopy (d) onto the mounting plate (a) with 2 set screws (f) and tighten.
15. Attach the alabaster (n), on the module(l) by turning in a clockwise direction.
16. Restore power to the junction box and test fixture.
17. For non-user replaceable light sources: the light source contained in this luminaire shall only be replace by the manufacturer or his service agent or a similar qualified person.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS