


ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:

ITEM NO.: 89479	NAME: Gustavo Chandleier
MATERIAL TYPE: Steel/Linen	FINISH: Chattered AB/White
SOCKET TYPE: E12	SOCKET QTY: 10
BULB WATTAGE: 60W/16W CFL/13W LED	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 19.62LBS

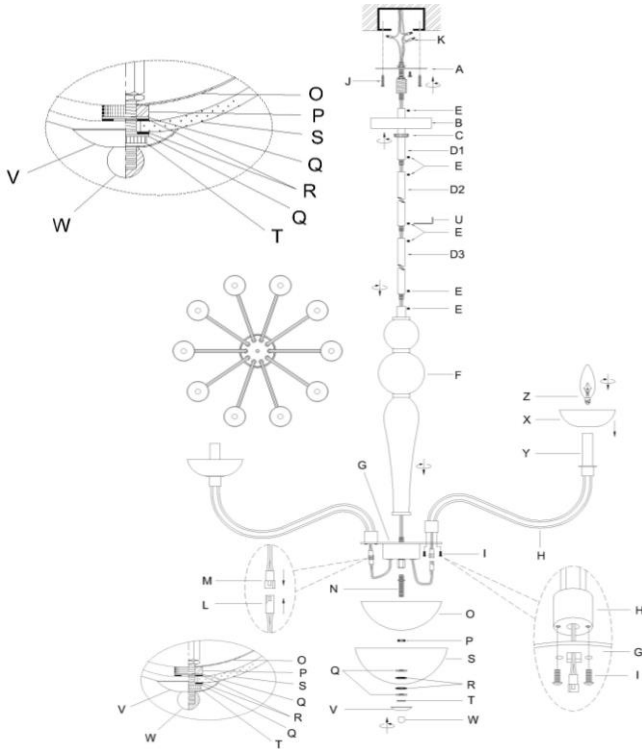

TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Please be sure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Put the central glass column(f) on lamp body(g) and secure in a clockwise direction till tight.
4. Then connect central glass column(f) and canopy(b) with rod (d1, d2, d3), when you connect the rods, loosen the small hex screws(e) first then tighten with Allen wrench(u) after all rods are connected. Be sure all the hexagonal screws are tight enough.
5. Remove the mounting plate(a)from the canopy(b)by turning collar loop (c) in a counterclockwise direction.
6. Carefully inspect the fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. The bare wire is the grounded wire.
7. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
8. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
9. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
10. Gently tuck the wire connections(k) neatly into the ceiling junction box.
11. Attach the mounting plate (a) to the outlet box using the mounting screws(j) and tighten screws(j) with a screwdriver.
12. Push collars loop up to canopy (b) and tighten onto nipple in mounting plate (a) by turning in a clockwise to secure canopy.
13. Pass through the wire into the hole of the lamp body(g)and insert the glass arm(h) into the lamp body(g), then secure the glass arm(h) with two screws(i). Tighten screws(i) with a screwdriver. Repeat the same operation for the other glass arms.
14. Connect each wire from glass arm to lamp body by connect female plug(m) from glass arm to the male plug(l) from lamp body.
15. Screw the threaded nipple(n) on the lamp body(g) till tight, then attached the metal bowl(o) to the threaded nipple(n) and secure by screw nut 1(p).
16. Put the metal washer(q), plastic washer(r), bottom glass bowl(s), plastic washer(r), metal washer(q) and screw nut 2(t) into the threaded nipple(n) in turn, then secure glass bowl(s) by screw nut 2(t).
17. Attached metal plate(v) on the threaded nipple(n) and fix by finial(w).
18. Attach the glass bowl(x) onto the glass arm(h).
19. Insert 10 type b 60w bulb (or/cfl 13w or/led 8w, not included) into the sockets(g),do not exceed specified wattage.
20. Restore power to the junction box and test fixture.

PARTS INCLUDED:

A MOUNTING PLATE	1 PC	O METAL BOWL	1 PC
B CANOPY	1 PC	P SCREW NUT 1	1 PC
C COLLAR LOOP	1 PC	Q METAL WASHER	2 PCS
D1,D2,D3 ROD	3 PCS	R PLASTIC WASHER	2 PCS
E HEX SCREWS	7 PCS	S BOTTOME GLASS E	1 PC
F GLASS COLUMN	1 PC	T SCREW NUT 2	1 PC
G LAMP BODY	1 PC	V METAL PLATE	1 PC
H GLASS ARM	10 PCS	W FINIAL	1 PC
I SCREW	20 PCS	X GLASS BOWL	10 PCS
L MALE PLUG	10 PCS	Y SOCKETS	10 PCS
M FEMALE PLUG	10 PCS	Z BULB(NOT INCLUDİ	10 PCS
N THREADED NIPPLE	1 PC		

HARDWARE INCLUDED:

J Plastic Wire Connector	L Allen Wrench
K Mounting Screws	Green Ground Screw

TO INSTALL YOU WILL NEED:

- 2 people recommended
 - Phillips Screwdriver
- We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS