

PANDORA
WS25336

WALL

PROJECT

DESCRIPTION

Dual square profile linear aluminum arms with rectangular wall mount. Inset opal polymeric diffusers. Finely textured plate or powder-coated finish. Wall emitting lights with rotational adjustment.



WS25336-BK
Black



WS25336-WH
White



WS25336-BN
Brushed Nickel




WS25336-GD
Gold

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	W36" x H4-5/8" x E3-7/8"
Light Source	LED with DC Driver
Wattage	27W
Total Lumens	2290lm
Delivered Lumens	BK-650lm*; BN-1150lm*; GD-950lm*; WH-1330lm*;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
ADA Compliant	Yes
Compliance	ADA
Location	Dry
Warranty	5 Years
Illumination Direction	Footlight Illumination
Mounting Style	All Orientation; Wall;
CEC Title 24 JA8	Yes, JA8-19
Canopy Dimensions	W3" x H5-1/8" x E1-5/8"

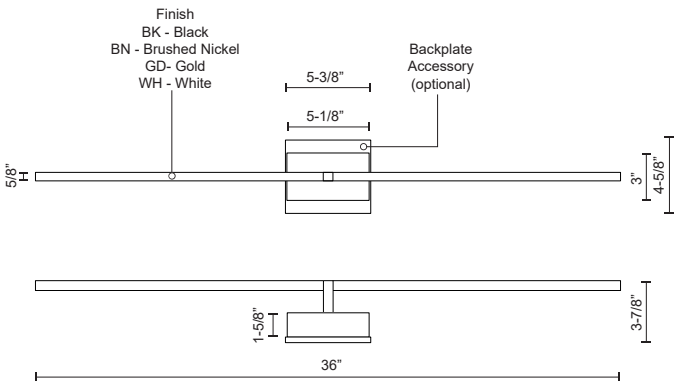

KUZCO

19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA

WWW.KUZCOLIGHTING.COM

COMMENT