EUROPA MP47613 PENDANTS






SPECIFICATION DETAILS

* For custom options, consult factory for details.

Light SourceLED with DC DriverNattage30WTotal Lumens2550ImDelivered Lumens1200ImVoltage120VColor Temperature3000KColor Temperature3000KDytional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyLED Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGass DetailsOpal GlassAdjustableYesRod Length45" Max (2 x 22-1/2" + 1 x 12")Ceiling AdaptorYesLocationDryMaranty5 Years		
Wattage30WNational Control30WTotal Lumens2550ImDelivered Lumens1200ImColor Temperature3000KColor Temperature3000KCRI (Ra)90CRIDytional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyLED Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGalass DetailsOpal GlassAdjustableYesCeiling AdaptorYesLocationDryMarranty5 Years	Fixture Dimensions	D4" x H3-5/8"
Total Lumens2550lmDelivered Lumens1200lmVoltage120VColor Temperature3000KStore Temperature3000KOptional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyCER Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGlass DetailsOpal GlassAdjustableYesCeiling AdaptorYesCocationDryMarranty5 Years	Light Source	LED with DC Driver
Delivered Lumens1200ImDolor Temperature3000KColor Temperature3000KColor Temperature3000KDytional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyDelivered Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGalass DetailsOpal GlassAdjustableYesRod Length45" Max (2 x 22-1/2" + 1 x 12")Ceiling AdaptorYesLocationDryMarranty5 Years	Wattage	30W
Voltage120VColor Temperature3000KCRI (Ra)90CRIOptional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyLED Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGlass DetailsOpal GlassAdjustableYesRod Length45" Max (2 x 22-1/2" + 1 x 12")Ceiling AdaptorYesLocationDryMarranty5 Years	Total Lumens	2550lm
Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, Hand Motion Select& Dimming Glass Details Opal Glass Adjustable Yes Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Marranty 5 Years	Delivered Lumens	1200lm
CRI (Ra)90CRIOptional Color Temps2700K - 5000K Available, Minimum Order Quantities ApplyLED Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingGlass DetailsOpal GlassAdjustableYesRod Length45" Max (2 x 22-1/2" + 1 x 12")Ceiling AdaptorYesLocationDryMarranty5 Years	Voltage	120V
Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, Hand Motion Select& Dimming Glass Details Opal Glass Adjustable Yes Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Marranty 5 Years	Color Temperature	3000К
ApplyLED Rated Life50,000 hoursDimming100% - 10%, Hand Motion Select& DimmingDiass DetailsOpal GlassAdjustableYesRod Length45" Max (2 x 22-1/2" + 1 x 12")Ceiling AdaptorYesLocationDryMarranty5 Years	CRI (Ra)	90CRI
Dimming 100% - 10%, Hand Motion Select& Dimming Glass Opal Glass Adjustable Yes Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Marranty 5 Years	Optional Color Temps	
Glass Details Opal Glass Adjustable Yes Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Narranty 5 Years	LED Rated Life	50,000 hours
Adjustable Yes Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Warranty 5 Years	Dimming	100% - 10%, Hand Motion Select& Dimming
Rod Length 45" Max (2 x 22-1/2" + 1 x 12") Ceiling Adaptor Yes Location Dry Warranty 5 Years	Glass Details	Opal Glass
Ceiling Adaptor Yes Location Dry Warranty 5 Years	Adjustable	Yes
Location Dry Narranty 5 Years	Rod Length	45" Max (2 x 22-1/2" + 1 x 12")
Narranty 5 Years	Ceiling Adaptor	Yes
	Location	Dry
Canopy Dimensions L25" x W4-3/4" x H1-3/8"	Warranty	5 Years
	Canopy Dimensions	L25" x W4-3/4" x H1-3/8"

DESCRIPTION

Perched at the end of an elongated thin tube rests a deceptively simple globe, emitting both ambient light while concealing the focused LED source. The versatile Europa ceiling-mount series is characterized by the integrated ball joint connectors that allow the adaptive placement of illuminance. Available as in single and multi-light configurations.

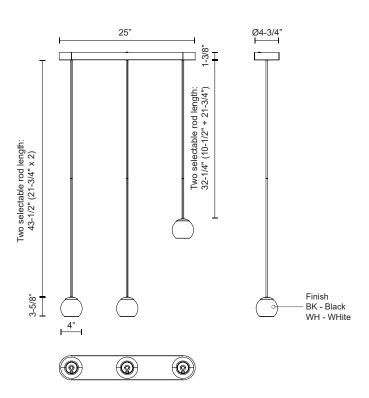

* Maximum two rods for installation

KUZCO

19054 28TH AVENUE SURREY - BC V3Z 6M3 CANADA COMMENT



WWW.KUZCOLIGHTING.COM