

WAC LIGHTING

Ocularc 3.0

0° - 35° Adjustable Round

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRA	F 50°	927 2700K - 90	900	1196	BK Black BN Brushed Nickel WT White
		930 3000K - 90	970	1285	
	N 25°	927 2700K - 90	915	2513	
		930 3000K - 90	985	2701	
	S 15°	927 2700K - 90	900	4384	
		930 3000K - 90	970	4712	

Example: **R3BRA-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

SPECIFICATIONS


Construction:	Die-cast aluminum trim and heat sink
Power:	11W
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated:Black, Electrostatically Powder Coated::White, Electrostatically Powder Coated::Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant



FINISHES:



LINE DRAWING:



WAC LIGHTING

Ocularc 3.0

Remodel Housing

Model & Product

R3BBRT-10 Ocularc 3.0 LED Remodel IC-Rated Housing

Example: **R3BBRT-10**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge cold rolled steel wiring box
Power:	11W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	4 1/4"
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, IC, Airtight

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:

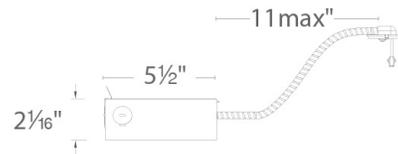

WAC LIGHTING

Ocularc 3.0

New Construction Housing

Model

R3BNICA-10 Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120V)
R3BNICA-10U Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)
R3BNICA-10U-EM Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)

Example: **R3BNICA-10**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge cold rolled steel wiring box
Power:	11W
Input:	120-277 VAC, 50/60Hz, 120 VAC
Dimming:	ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	4 1/4"
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, IC, Airtight

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:

