

# WAC LIGHTING

## Ocularc 3.0

### Downlight Round

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRD	F 50°	927 2700K - 90	900	1308	BK Black BN Brushed Nickel HZWT Haze/White WT White
		930 3000K - 90	970	1406	
	N 25°	927 2700K - 90	895	2767	
		930 3000K - 90	965	2973	
	S 15°	927 2700K - 90	895	4776	
		930 3000K - 90	965	5132	

Example: **R3BRD-F927-BK**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

#### SPECIFICATIONS


<b>Construction:</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED
	3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electrostatically Powder Coated:Black, Electrostatically Powder Coated::White, Electrostatically Powder Coated:::Brushed Nickel, Electrostatically Powder Coated::::Haze/White
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant



#### FINISHES:

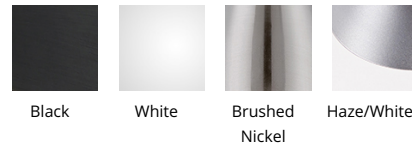

#### LINE DRAWING:



# WAC LIGHTING

## Ocularc 3.0

### Remodel Housing

#### Model & Product

R3BBRT-10 Ocularc 3.0 LED Remodel IC-Rated Housing

Example: **R3BBRT-10**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge cold rolled steel wiring box
Power:	11W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	4 1/4"
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, IC, Airtight

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

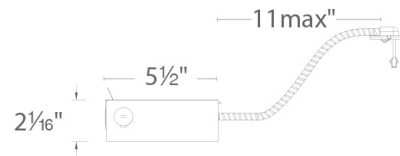

# WAC LIGHTING

## Ocularc 3.0

### New Construction Housing

#### Model

R3BNICA-10 Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120V)

R3BNICA-10U Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)

R3BNICA-10U-EM Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)

Example: **R3BNICA-10**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

Construction:	20 gauge cold rolled steel wiring box
Power:	11W
Input:	120-277 VAC, 50/60Hz, 120 VAC
Dimming:	ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	4 1/4"
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, IC, Airtight

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

