

# OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

## FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4¼"

## SPECIFICATIONS

**Construction:** Die-cast aluminum trim and heat sink

**Dimming:** ELV or TRIAC or 0-10V dimming compatible

**Input:** 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U

**Light Source:** 11W 95 CRI Single LED Module. Rated Life: 50,000 hours

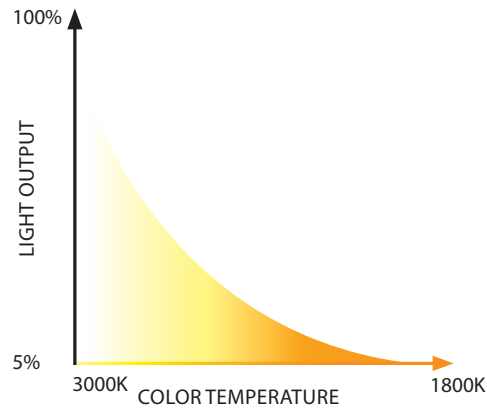
**Mounting:** Retention clips firmly hold trim to housing.

**Finish:** Powder coated

**Ceiling thickness:** ½" - 1"

**Standards:** ETL&cETL listed, Damp location listed

**Operating Temperature:** -4°F to 104°F (20°C to 40°C)



Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	<b>R3BRA</b> Round 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	745	2820	<b>WD</b> 3000K - 1800K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White <b>BK</b> Black
	<b>R3BSA</b> Square 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	745	2820	<b>WD</b> 3000K - 1800K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White <b>BK</b> Black

## R3BRA-\_\_WD-WT

Example: R3BRA-SWD-WT

waclighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760

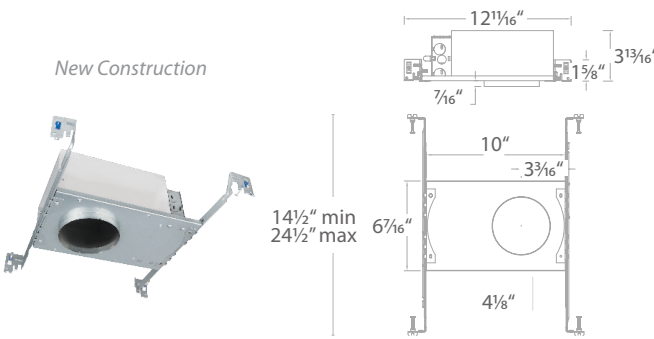
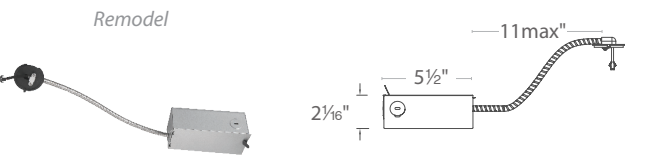
# OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

# WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  <p>12<sup>1</sup>/<sub>16</sub>"</p> <p>3<sup>13</sup>/<sub>16</sub>"</p> <p>7<sup>1</sup>/<sub>16</sub>"</p> <p>1<sup>1</sup>/<sub>8</sub>"</p> <p>10"</p> <p>3<sup>3</sup>/<sub>16</sub>"</p> <p>6<sup>7</sup>/<sub>16</sub>"</p> <p>4<sup>1</sup>/<sub>8</sub>"</p> <p>14<sup>1</sup>/<sub>2</sub>" min 24<sup>1</sup>/<sub>2</sub>" max</p>	<b>R3BNICA-10</b> IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth  Allows adjustment in any direction when used with adjustable trims
	<b>R3BNICA-10U</b> IC-Rated, Airtight	120V - 277V	<b>120V</b> 100% - 5% TRIAC, ELV, 0-10V	<b>277V</b> 100% - 1% 0-10V
<p><i>Remodel</i></p>  <p>11max"</p> <p>5<sup>1</sup>/<sub>2</sub>"</p> <p>2<sup>1</sup>/<sub>16</sub>"</p>	<b>R3BBRT-10</b> IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims  Ceiling thickness: 1/2" - 1"

Example: **R3BNICA-10**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760