

WAC LIGHTING

Ocularc 1.0

8W Open Reflector Round

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R1BRD-08	F 45°	927 2700K - 90	530	825	BK Black
		930 3000K - 90	570	892	BN Brushed Nickel
	N 25°	927 2700K - 90	620	2217	HZWT Haze/White
		930 3000K - 90	670	2397	WT White

Example: **R1BRD-08-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Cutout 2 1/2"
- Single spot light source
- Ceiling thickness: 1/2" - 1"
- Sold as New Construction, may be reconfigured in the field for Remodel
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim with aluminum heat sink
Power:	7.5W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Cut Out:	2 1/2"
Finish:	Electrostatically Powder Coated:Black, Electrostatically Powder Coated::Haze/White, Electrostatically Powder Coated:::White, Electrostatically Powder Coated:::Brushed Nickel
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant, IC, Airtight



FINISHES:

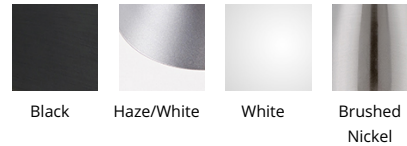

LINE DRAWING:

