


 $Pensi\ DC\ >\ {\tt Configure\ item\ number\ from\ attributes\ below}.$

	Finish	Blade Span	Blade Color	Light Option	Control Option
#PEN	-	-	-	-	-
	GW Gloss White AA Aluminum/Anthracit	52 52" Span	WH White AL Aluminum	NL No Light 151 7W GU10 LED	WC Wall Control RC Remote Control CC Wall/Remote Combo

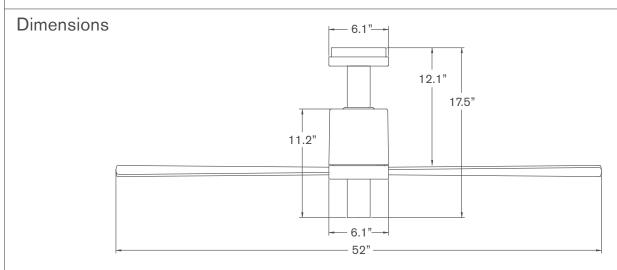

Specifications

- 6-speed, reversible DC motor
- Die cast and extruded aluminum construction
- 52" span, injection-molded ABS blades
- Pre-configured with a 4" down rod (longer options also available)
- Optional LED light: 7W, 90 CRI, 3000K, 500 lumens (dimmable), GU10 base; CA Title 24, JA8-2019 compliant
- For flat ceilings only
- Designed by Jorge Pensi
- ETL listed for dry and damp locations
- Weight: 16.0 lbs (7.3 kgs)

Performance Data

LOWEST SPEED

RPM: 45 CFM: 1,445 Watts: 2.35 CFM/W: 615

HIGHEST SPEED

RPM: 170 CFM: 7,020 Watts: 26.56 CFM/W: 264

Energy Guide Data

Average Energy Use 19 Watts

> Average Airflow 4,407 CFM

Yearly Energy Cost \$5

Average Efficiency 235 CFM/Watt

Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

The Modern Fan Co. tel 541-482-8545 toll free 888-588-3267 email info@modernfan.com website modernfan.com

Pensi DC



FAN FINISHES



PLYWOOD BLADES

Plywood blades are constructed of furniture grade veneers, painted or stained as shown here. Natural variations may exist in woodgrains and finishes.



PENSI DC CONTROLS

Pensi DC controls use RF transmission to a receiving unit included with each fan, providing six speeds, reversing and light function (on/off or dimming). Control selection is made at time of order and incorporated into fan item number. Controls utilize dedicated (unique) RF channels to avoid interference with other ceiling fans installed nearby. The wall control (if ordered) also includes a master power switch.

Wall Control (WC)

Remote Control (RC)

Wall/Remote Combo (CC)







- * The Pensi DC must use one of the above control options. Third party fan controls are not compatible with this product. The Remote Control (RC) can be used in combination with a standard power switch (on-off) in wall box.
- ** Wall control unit is designed for operation of a single fan/fan light only. For multiple units on a single switch leg, the remote control option can be used if the fans are within suitable range. Contact Modern Fan customer support with questions or for additional guidance.
 - *** To replace lost or damaged control components or to add secondary control to existing control sets (e.g. to add a handset to an existing wall control system), contact Modern Fan Co. customer support for ordering guidance.

DOWN RODS

The Pensi DC ships standard with a 4" down rod. Use the following part numbers to order accessory down rods.

	Finish			Length	
#DRP -			-		
	•		•		
	GW	Gloss White	11	11" for 24" OAL	
	AA	Anthracite	23	23" for 36" OAL	
			35	35" for 48" OAL	

Note: The Pensi DC fan is suitable for installation on flat ceilings only.