


## ASSEMBLY INSTRUCTIONS FOR YOUR CINCH FLOOR LAMP

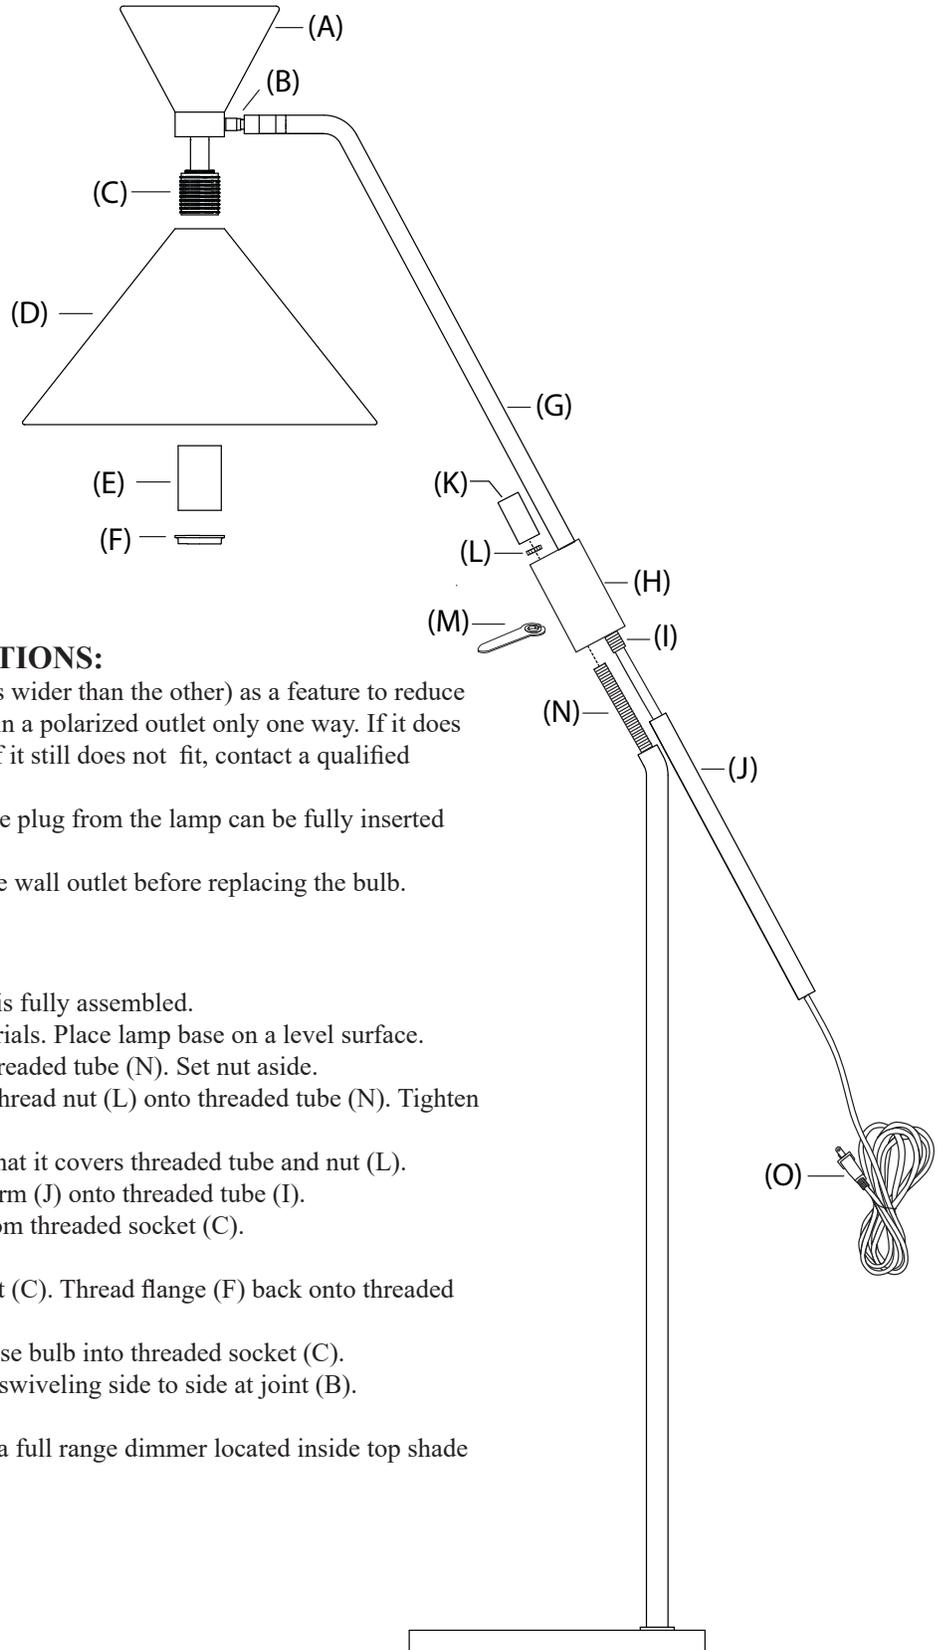

### IMPORTANT SAFETY INSTRUCTIONS:

- \* This lamp has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If it does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do NOT alter the plug.
- \* Do not use with an extension cord unless the plug from the lamp can be fully inserted into the extension cord receptacle.
- \* Switch power off and remove plug from the wall outlet before replacing the bulb.
- \*This lamp is UL rated for dry locations.

### ASSEMBLY INSTRUCTIONS

NOTE: Do not connect electricity until lamp is fully assembled.

1. Unpack all parts and remove packing materials. Place lamp base on a level surface.
2. Using wrench (M), remove nut (L) from threaded tube (N). Set nut aside.
3. Slide threaded tube (N) through hub (H). Thread nut (L) onto threaded tube (N). Tighten with wrench (M) until hand tight.
4. Thread cap (K) onto threaded tube (N) so that it covers threaded tube and nut (L).
5. Pulling cord taut to avoid damage, thread arm (J) onto threaded tube (I).
6. Remove flange (F) and socket cover (E) from threaded socket (C).
7. Slide shade (D) over threaded socket (C).
8. Place socket cover (E) over threaded socket (C). Thread flange (F) back onto threaded socket (C) to secure shade to fixture.
9. Install one 60W MAX. Type A, medium base bulb into threaded socket (C).
10. Move shade to desired position by gently swiveling side to side at joint (B).
11. Insert polarized plug (O) into wall outlet.
12. Control power to the fixture by operating a full range dimmer located inside top shade (A).