WAFER 0-10V | LED SURFACE MOUNT

57715 | 58711 | 58713 | 58715 | 58737 | *58780 | *58784

- Range Voltage Input 120-277V
- Die Cast Aluminum frame
- Edge Lit LED technology
- Energy Star and T24 Options
- Patented Driver WO2022166960A1 Installation on select models
- For Dimmer information: See Dimming Compatibility Chart

Job Name	:
Job Type	:
Quantity	:
Comments	<u> </u>






58780WT 7" Empty Shell



*58784WTWT Wafer LED 7" Emergency Back Up

PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

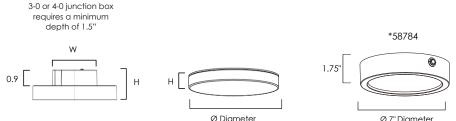

0.9 H	H [1.75"
	Ø Diameter	Ø 7" Diameter

UREMENTS	LAMPING							
DIMENSION	BULB TYPE	ССТ	CRI			DIMMABLE	V INPUT	
5.5"Ø x 0.5"H	10W Integrated LED	3000K	90+	1290	1200	0-10V	120-277V	
7"Ø x 0.5"H	15W Integrated LED	3000K	90+	930	640	0-10V	120-277V	
9"Ø x 0.5"H	20W Integrated LED	3000K	90+	1500	1100	0-10V	120-277V	
10"Ø x 0.5"H	20W Integrated LED	3000K	90+	2250	1600	0-10V	120-277V	
15"Ø x 0.5"H	30W Integrated LED	4000K	90+	3000	2500	0-10V	120-277V	
7"Ø x 1.5"H	17W Integrated LED	3000K	90+	1250	1150	0-10V	120-277V	
	DIMENSION 5.5"∅ × 0.5"H 7"∅ × 0.5"H 9"∅ × 0.5"H 10"∅ × 0.5"H 15"∅ × 0.5"H	DIMENSION BULB TYPE 5.5"∅ x 0.5"H 10W Integrated LED 7"∅ x 0.5"H 20W Integrated LED 9"∅ x 0.5"H 20W Integrated LED 10"∅ x 0.5"H 20W Integrated LED 15"∅ x 0.5"H 30W Integrated LED	DIMENSION BULB TYPE CCT 5.5"∅ x 0.5"H 10W Integrated LED 3000K 7"∅ x 0.5"H 15W Integrated LED 3000K 9"∅ x 0.5"H 20W Integrated LED 3000K 10"∅ x 0.5"H 20W Integrated LED 3000K 15"∅ x 0.5"H 30W Integrated LED 4000K	DIMENSION BULB TYPE CCT CRI 5.5"∅ x 0.5"H 10W Integrated LED 3000K 90+ 7"∅ x 0.5"H 15W Integrated LED 3000K 90+ 9"∅ x 0.5"H 20W Integrated LED 3000K 90+ 10"∅ x 0.5"H 20W Integrated LED 3000K 90+ 15"∅ x 0.5"H 30W Integrated LED 4000K 90+	DIMENSION BULB TYPE CCT CRI RATED 5.5"∅ x 0.5"H 10W Integrated LED 3000K 90+ 1290 7"∅ x 0.5"H 15W Integrated LED 3000K 90+ 930 9"∅ x 0.5"H 20W Integrated LED 3000K 90+ 1500 10"∅ x 0.5"H 20W Integrated LED 3000K 90+ 2250 15"∅ x 0.5"H 30W Integrated LED 4000K 90+ 3000	DIMENSION BULB TYPE CCT CRI RATED DELIVERED 5.5"∅ x 0.5"H 10W Integrated LED 3000K 90+ 1290 1200 7"∅ x 0.5"H 15W Integrated LED 3000K 90+ 930 640 9"∅ x 0.5"H 20W Integrated LED 3000K 90+ 1500 1100 10"∅ x 0.5"H 20W Integrated LED 3000K 90+ 2250 1600 15"∅ x 0.5"H 30W Integrated LED 4000K 90+ 3000 2500	DIMENSION BULB TYPE CCT CRI RATED DELIVERED DIMMABLE 5.5"∅ x 0.5"H 10W Integrated LED 3000K 90+ 1290 1200 0-10V 7"∅ x 0.5"H 15W Integrated LED 3000K 90+ 930 640 0-10V 9"∅ x 0.5"H 20W Integrated LED 3000K 90+ 1500 1100 0-10V 10"∅ x 0.5"H 20W Integrated LED 3000K 90+ 2250 1600 0-10V 15"∅ x 0.5"H 30W Integrated LED 4000K 90+ 3000 2500 0-10V	

Always consult a qualified electrician before installing any lighting product

*EMERGENCY BACK UP MODEL. MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

FINISHES OPTIONS:

White (WT)

Satin Nickel (SN)

MATERIAL:

Aluminum Polycarbonate Lens

AVAILABLE SIZES: *NOMINAL 5" | 7" | 9" | 10" | 15"

RATINGS:

cETLus Wet Location Energy Star 2.0 Title 24 JA8 Compliant ADA extension Dimmable









ADDITIONAL:

RATED LIFE: 50,000 Hours OPERATING TEMP: -20° C (-4°), 40°C (104°F) PHOTOMETRIC: Reports Available Patented Technology: WO2022166960A1 in 9" and above

