

General Product Information


This product is suitable for indoor dry and damp locations only.

This product is to be installed to a standard 4" junction box with 3" round plaster ring or an octagon junction box.

Fixtures shipped with bulb included can be dimmed with TRIAC or ELV dimmers.

CAUTION - RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN POWER OFF TO THE JUNCTION BOX**

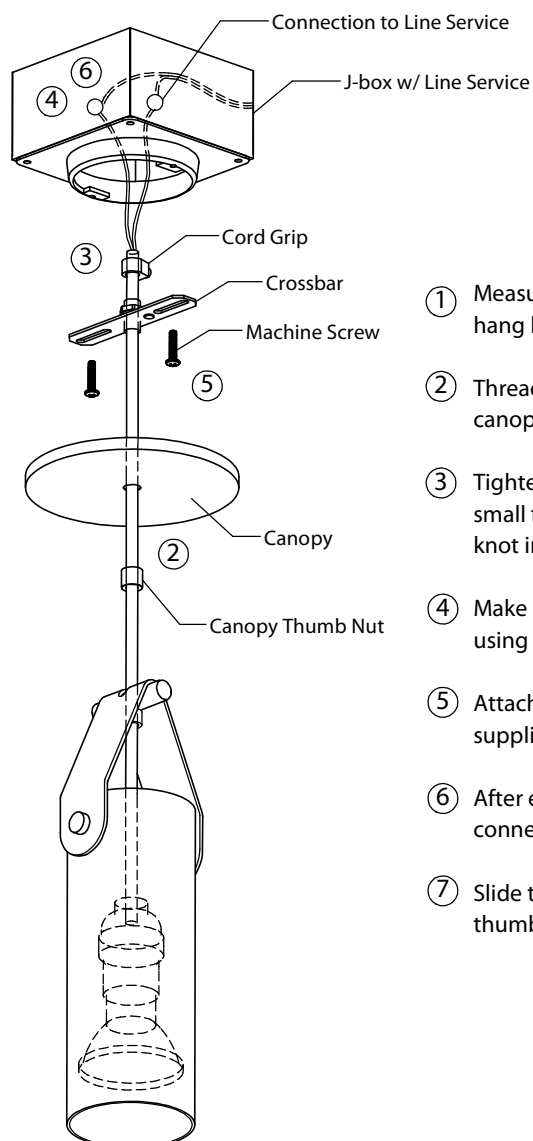

- ① Measure the desired height (H) that you want the fixture to hang below the ceiling.
- ② Thread the cable through the canopy thumb nut, low profile canopy, crossbar and strain relief fitting.
- ③ Tighten cord grip onto cable at desired height (H) using a small flathead screw driver. As an added safety measure, tie a knot in the cable above the cord grip.
- ④ Make electrical connections as shown in the image to the left using the supplied wire nuts.
- ⑤ Attach the crossbar assembly to the junction box using the supplied #8-32 screws.
- ⑥ After electrical connections have been made, place wire connections and excess wire into the junction box.
- ⑦ Slide the canopy up the cable and secure it by screwing the thumb nut onto the crossbar assembly.

