





dark stained walnut, gloss white

The Plura is a simple, straight forward fixture that is excellently executed. With the Plura it was about resolving the seams and edges and their relationships to one another. The result is a scalable fixture that has a sharp, sophisticated feel.

Nick Sheridan, Designer

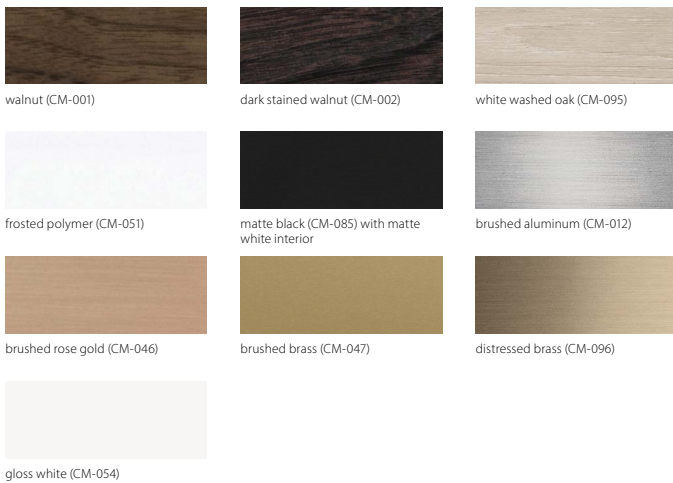

## Plura pendant

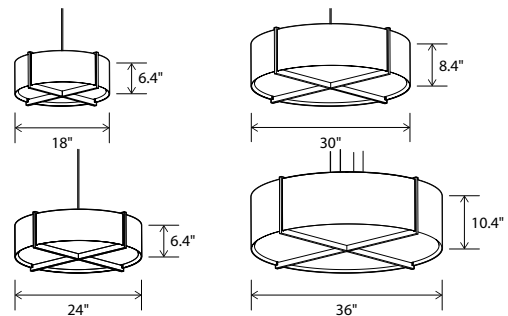

Dimensions:  
 Plura 18: 18" Ø, 6.4"  
 Plura 24: 24" Ø, 6.4"  
 Plura 30: 30" Ø, 8.4"  
 Plura 36: 36" Ø, 10.4"  
 Materials: solid wood, polymer  
 Product weight:  
 Plura 18: 5 lb  
 Plura 24: 6 lb  
 Plura 30: 9 lb  
 Plura 36: 13 lb

**Integrated LED Specifications**  
 Light output:  
 Plura 18 & 24: 1690 Lumens (source)  
 Plura 30 & 36: 2815 Lumens (source)  
 Light color\*: 2700 K or 3500 K  
 Color accuracy: 90+ CRI  
 Power usage:  
 Plura 18 & 24: 19.5 W  
 Plura 30 & 36: 32.5 W  
 Dimmable (see driver below)  
 Plura 18 & 24 driver location:  
 must be housed in J-box  
 Driver dimensions: 3.3" x 1.6" x 1", included  
 Plura 30 & 36 driver location:  
 housed in canopy  
**GU-24 Base Specifications**  
 Light source:  
 Plura 18 & 24: 2x GU-24 base socket  
 Plura 30 & 36: 4x GU-24 base socket  
 Lamping:  
 Plura 18 & 24: 2x GU-24 base self-ballasted bulbs, 18 W max each  
 Plura 30 & 36: 4x GU-24 base self-ballasted bulbs, 18 W max each  
 Bulbs not included  
 Input voltage: 300 V AC max  
 Wood grain will vary  
 Specifications subject to change



See below for canopy information  
 96" drop length, field adjustable  
 Suitable for a sloped ceiling  
 Wood grain will vary  
 Specifications subject to change


### MATERIAL & FINISH OPTIONS

Plura pendant part # 06-230-	
<b>Size</b>	
18" Ø	18
24" Ø	24
30" Ø	30
36" Ø	36
<b>Wood Body</b>	
walnut (CM-001)	W
dark stained walnut (CM-002)	D
white washed oak (CM-095)	O
<b>Shade Material</b>	
frosted polymer (CM-051)	
matte black (CM-085) with matte white interior	B
brushed aluminum (CM-012)	A
brushed rose gold (CM-046)	G
brushed brass (CM-047)	R
distressed brass (CM-096)	D
gloss white (CM-054)	W
<b>Lamping*</b>	
2700 K LED	27
3500 K LED	35
GU-24 base sockets	GU
<b>Driver (LED version only)</b>	
AC Input Voltage Range: 120-277 V	
120 V input: TRIAC, ELV & 0-10 V dimmable	
240 & 277 V input: only 0-10 V dimmable	P1

Includes frosted polymer (CM-051)

Also available in a flush mount version

\*Available in 3000K, 4000K and other color temperatures upon request

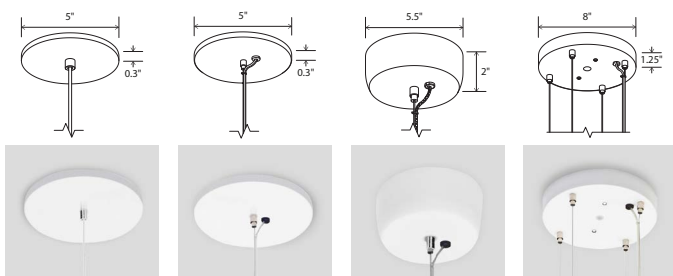


Plura 18 and Plura 24: textured white (CM-060) low-profile round canopy with white SVT

Plura 30 GU-24 Base Sockets: textured white (CM-060) low-profile round canopy clear SPT with steel cable

Plura 30 Integrated LED: textured white (CM-060) extended round canopy, clear SPT with steel cable

Plura 36: textured white (CM-060) 8" round canopy, clear SPT with steel cable

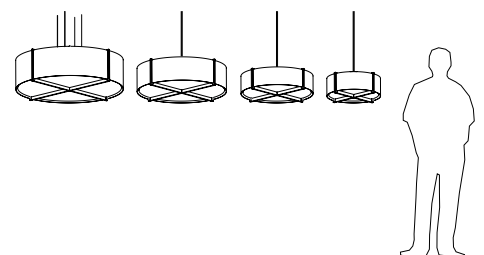

**▲WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)