

General Product Information



CAUTION - RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN POWER OFF TO THE JUNCTION BOX**

Junction Box Requirements: This fixture can be mounted to most standard junction boxes. It is the installer's responsibility to ensure that the site conditions, junction box, and fasteners used are suitable to support the weight of the fixture.

It is the installer's responsibility to verify that the provided suspension hardware is suitable for the site conditions.

Damage due to incorrect connections can be detected at the factory and is not covered under warranty.

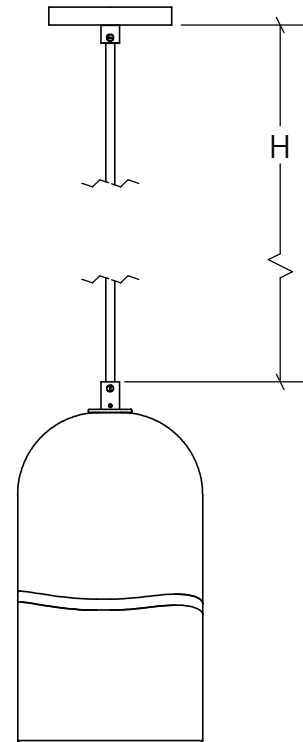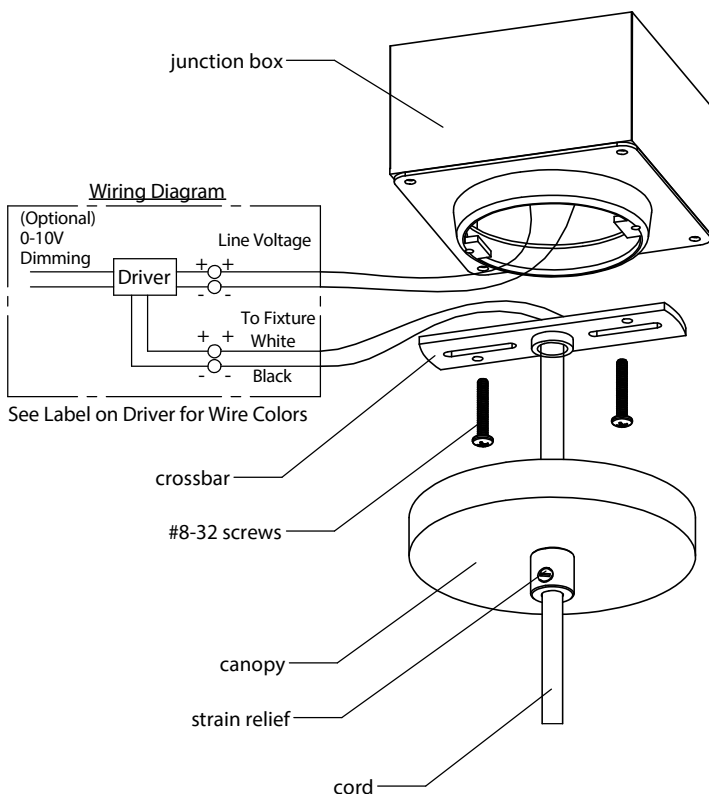

- ① Measure the desired height (H) that you want the fixture to hang below the ceiling.
- ② Thread the cord through the canopy and crossbar.
- ③ Tie a knot in the cable above the crossbar at the desired height (H). As an added safety measure, .
- ④ Make electrical connections shown in the images to the left using the supplied wire nuts.

CRITICAL NOTE: If 0-10V dimming control is to be used, connect 0-10V leads to the 0-10V dimmer. Otherwise, the tinned ends of the 0-10V leads should be snipped and capped individually such that they remain isolated from one another.

- ⑤ Place wire connections, driver, and excess wire into the junction box
- ⑥ Attach the crossbar to the junction box using the supplied #8-32 screws.
- ⑦ Slide the canopy to the junction box tighten the set screw.

