

Charleston Pendant

6691004 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

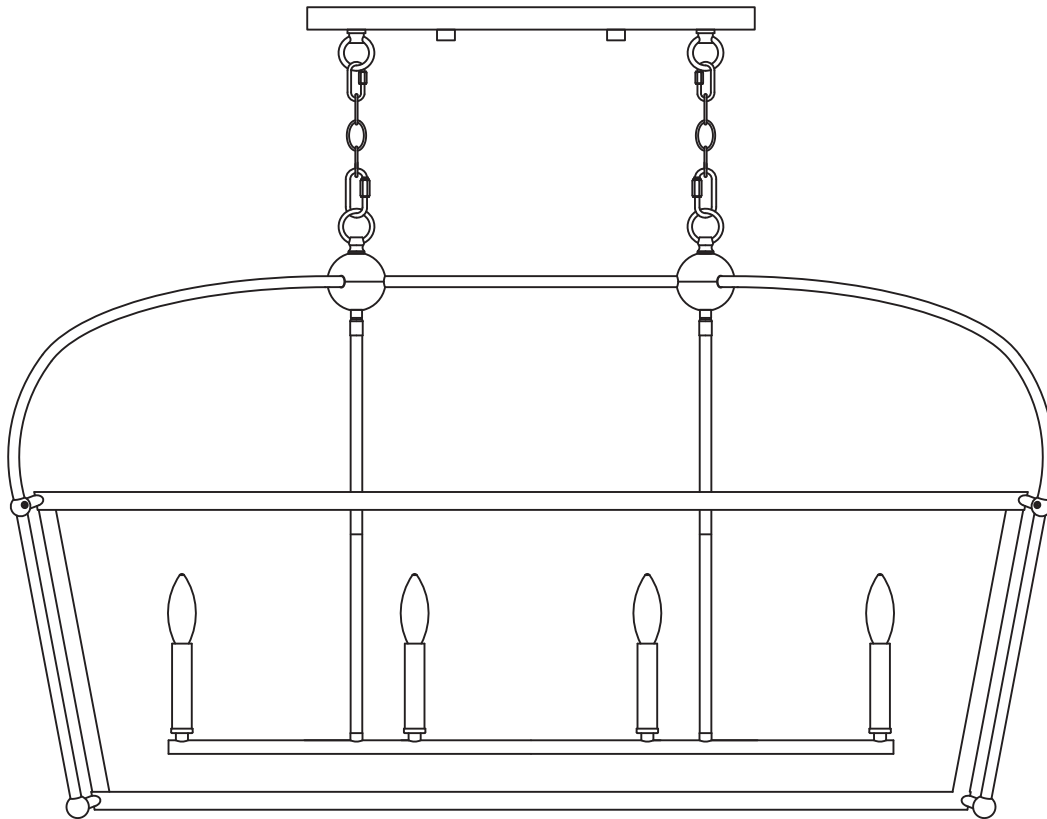

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

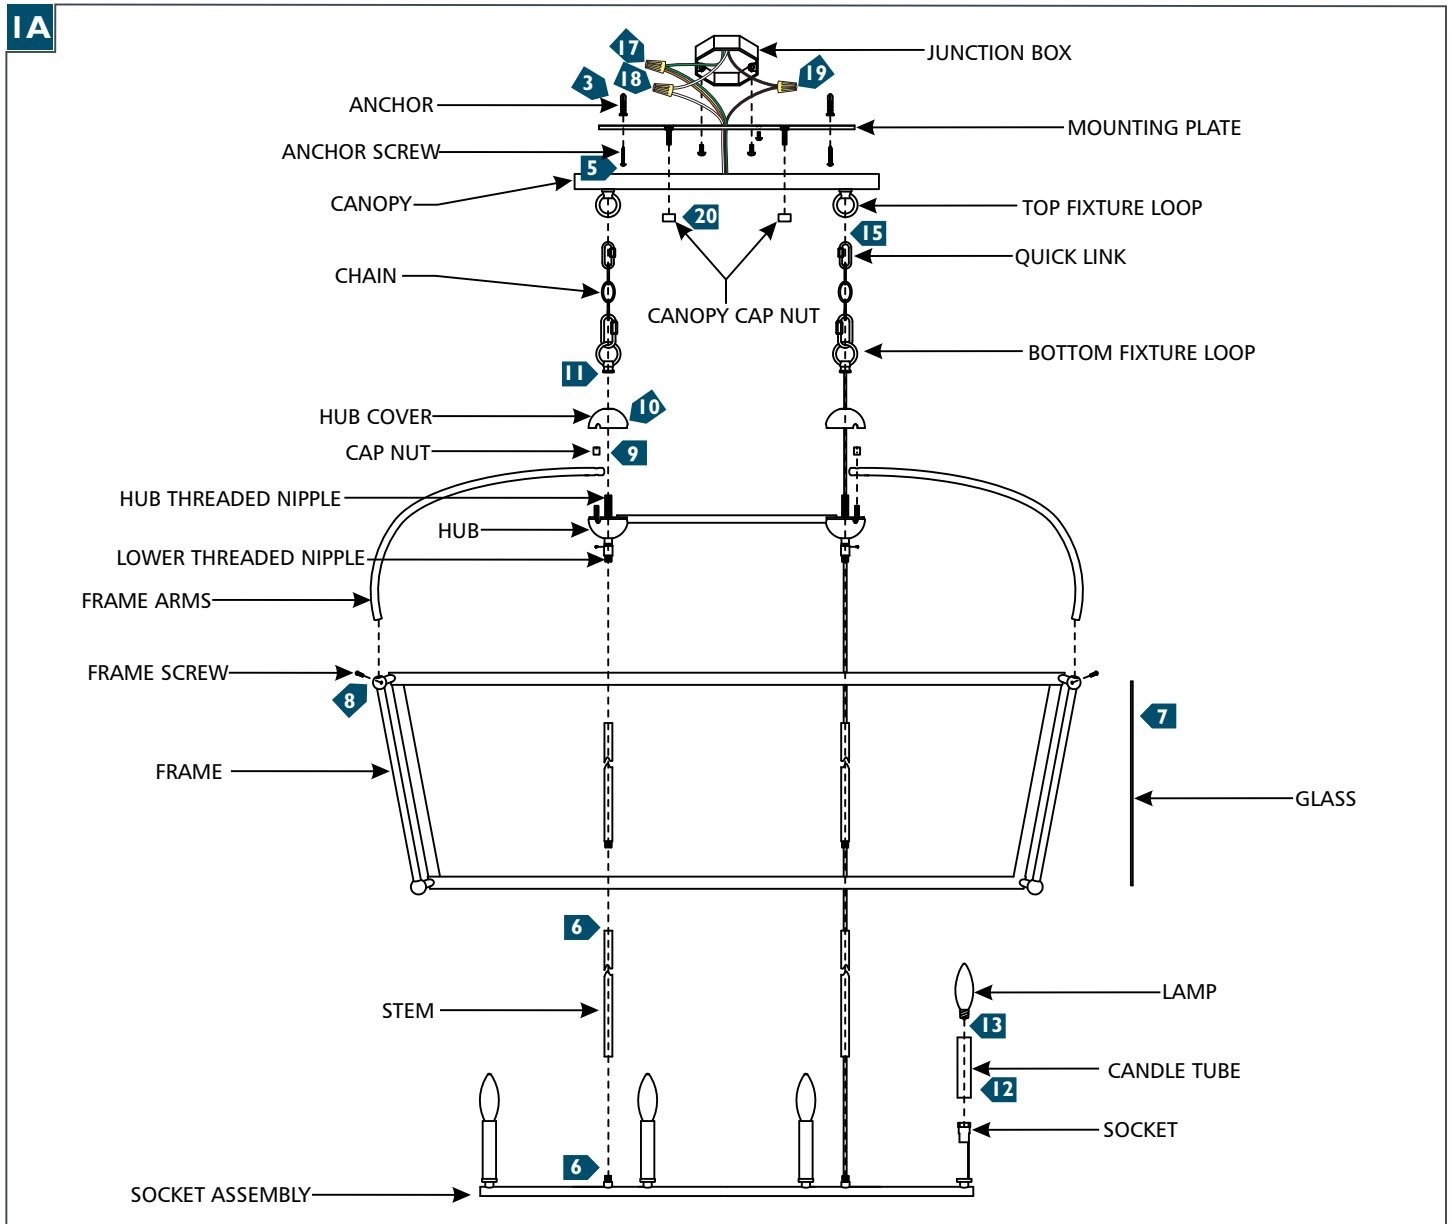

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor hole locations through the holes on the mounting plate. Remove the mounting plate.
- 3** Drill appropriate sized holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** Screw the anchor screws into the anchors.
- 6** Assemble both sets of stems, feed the wires through one of the stems and lower threaded nipple and screw them together, then screw them to socket assembly.
- 7** Slide the glass into the frame.
- 8** Install the fixture arms onto the frame using the frame screws.
- 9** Place the fixture frame over the socket/stem assembly, align and install the fixture arms onto the hubs, secure them in place with the cap nuts.
- 10** Feed the fixture wire through the hub cover over and place it over the hub. Repeat for other side without wires.
- 11** Feed the fixture wires through the bottom fixture loop and screw it onto the hub threaded nipple.
- 12** Install the candle tubes by sliding them over the sockets.
- 13** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.
- 14** Determine the wanted height of the fixture and remove a portion of the chain by opening a link from the top.
- 15** Connect the fixture to the canopy by using the quick link to connect the chains and the upper fixture loops.
- 16** Weave the cord through the chain and fixture loops, then out of the canopy. Trim the cord leaving enough to make electrical connections.
- 17** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 18** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 19** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 20** Neatly place all the wires into the junction box or canopy, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.