

Clark Pendant

6590501

1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

SAVE THESE INSTRUCTIONS!

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

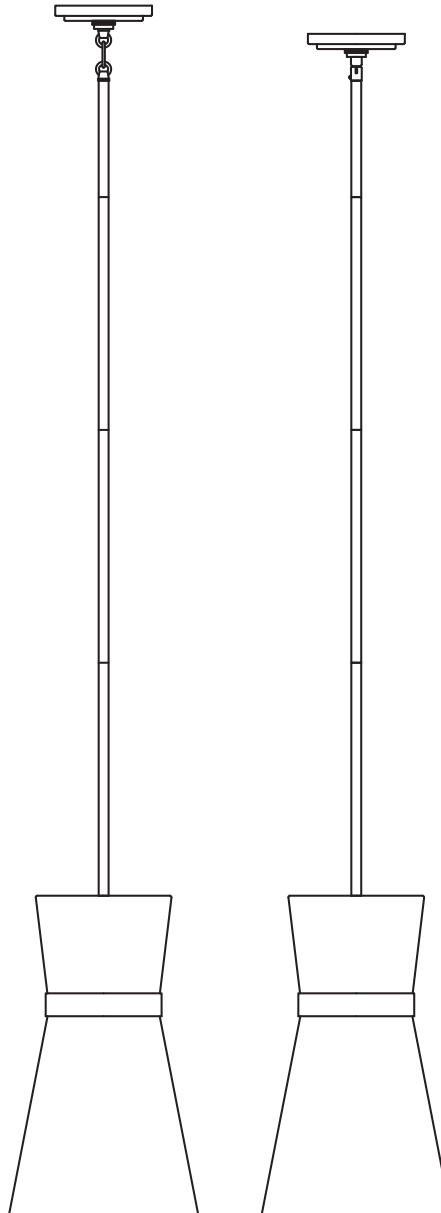

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

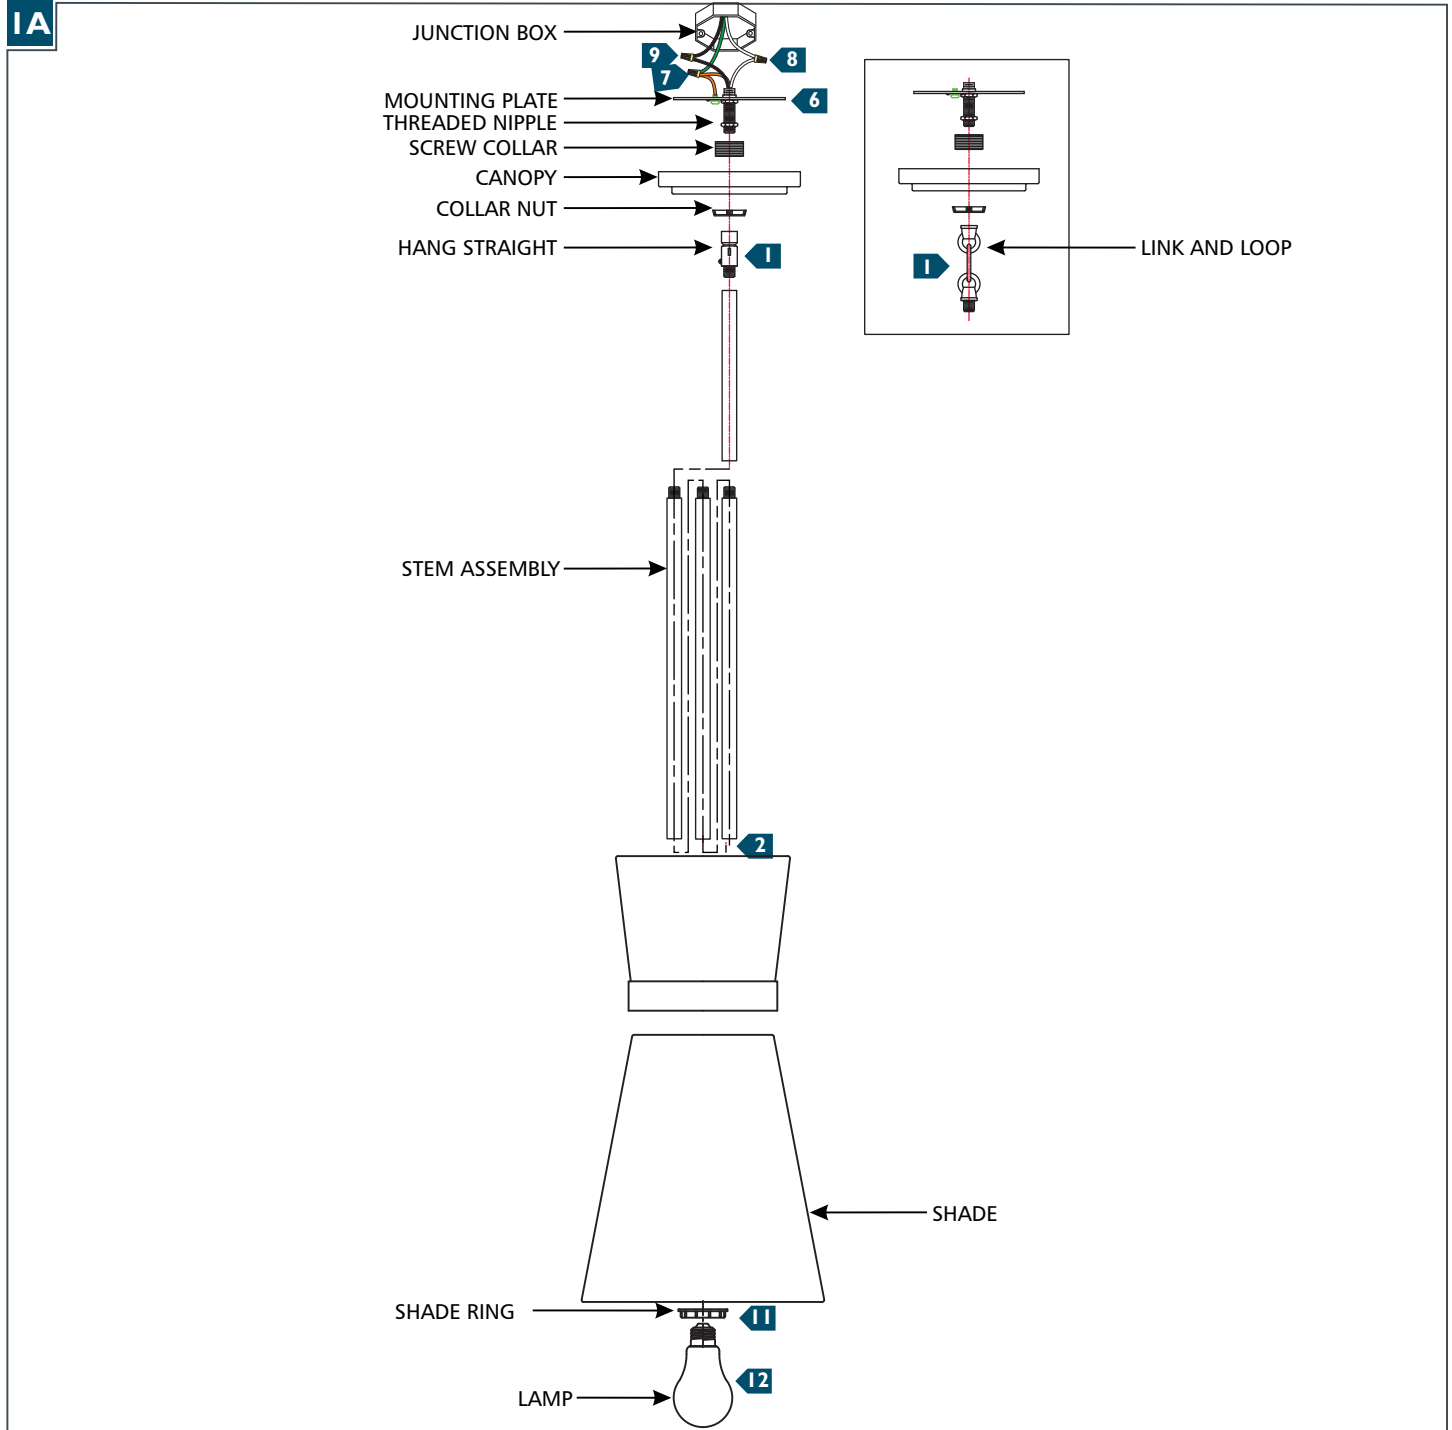

- 1** Determine the wanted height or look of the fixture with the provided stems, swivel, and/or chain and assemble them by screwing them together. All the parts may be used alone or used in combination. NOTE: Use hang straight for standard ceilings and use link and loop for sloped ceilings.
- 2** Feed the fixture wires through the stems/hang straight or link and loop assembly and screw the assembly to the socket assembly.
- 3** Unscrew the collar nut off the screw collar and place it onto the stem/hang straight or link and loop assembly followed by the canopy.
- 4** Screw the screw collar onto the threaded nipple.
- 5** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the hang straight or link and loop.
- 6** Align and secure the mounting plate to the junction box.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the ceiling and secure it in place with the collar nut.
- 11** Install the shade onto the socket and secure it in place with the shade ring.
- 12** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.