

# Jackie 6 Light Chandelier

3180706 | 1.2

VISUAL COMFORT & Co.

STUDIO COLLECTION

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

## CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE

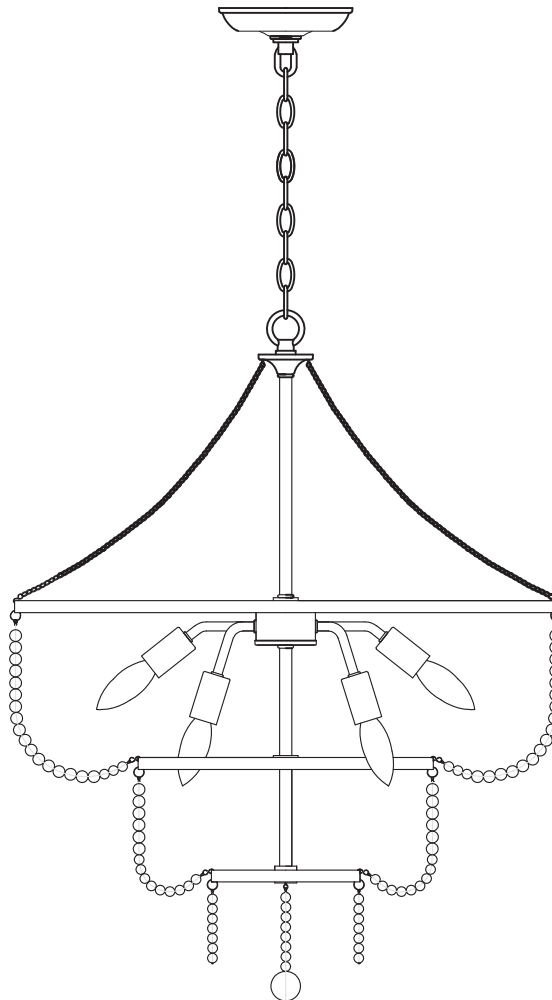

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

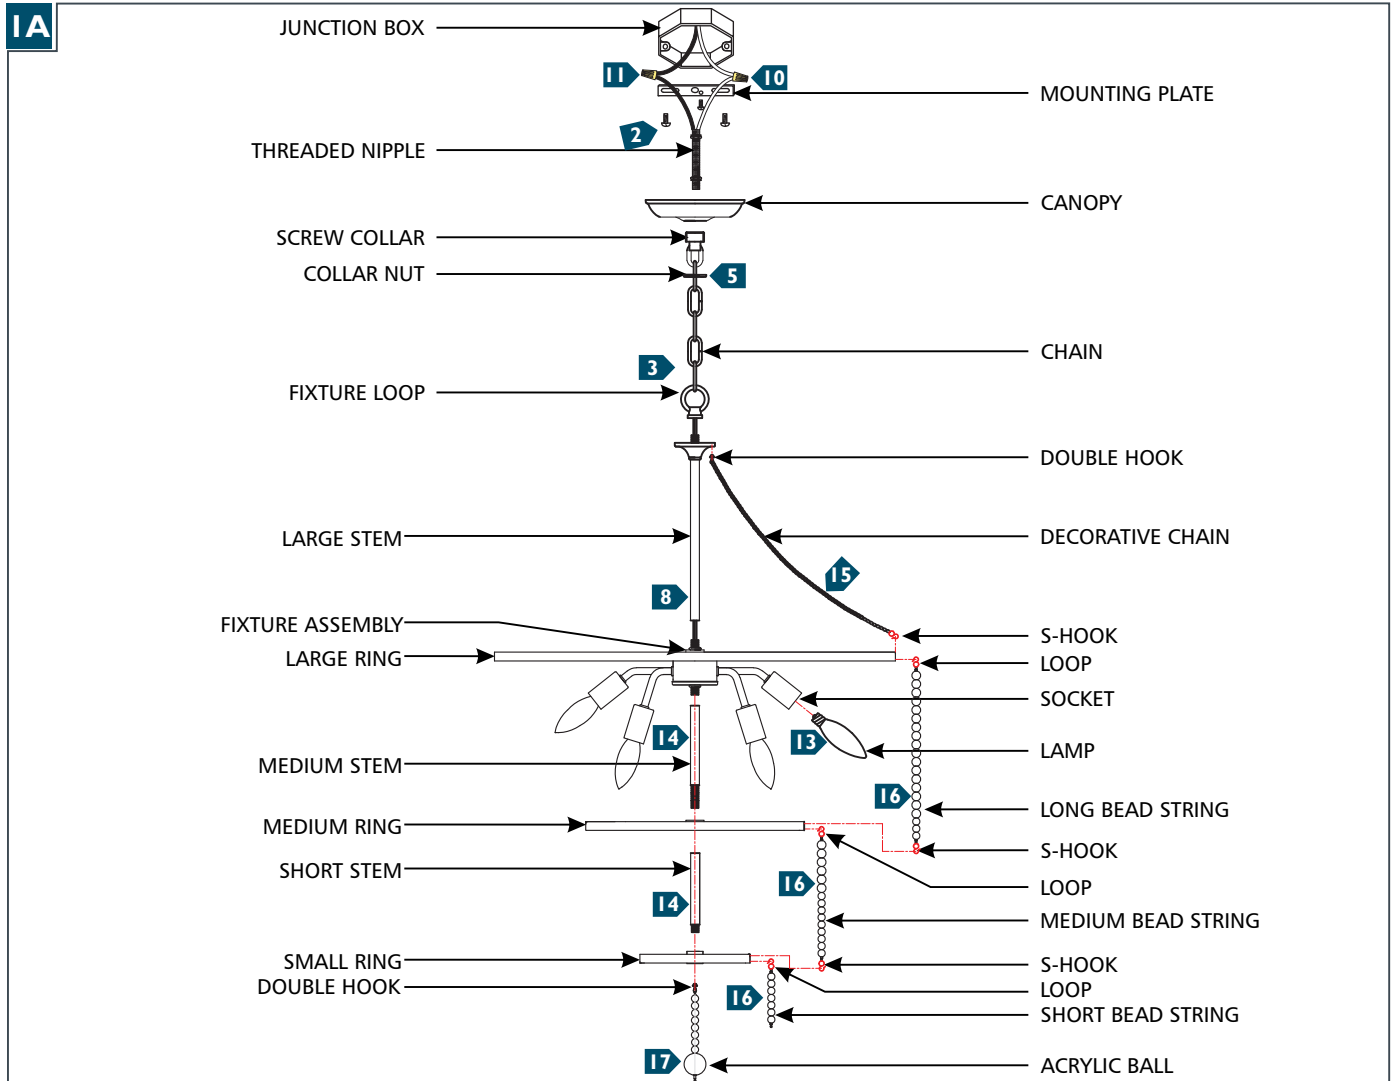

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- 4** Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- 5** Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- 6** Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link.
- 7** Weave the cord through the large stem, chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 8** Screw the large stem onto the fixture assembly, then screw the chain onto the large stem.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 14** Screw the medium stem onto the bottom of the fixture assembly, then screws the medium ring on to the medium stem. Screw the short stem onto the medium stem and ring assembly. Screw the short ring on to the bottom of the short stem.
- 15** Install the three decorative chains by pushing the double hooked end into the holes in the top of the large stem, then hook the "S" hook into the top of the large Ring.
- 16** Install the acrylic bead strings by hooking the loop to the bottom of the corresponding ring. Long string, to the Large ring, Medium string to the medium ring and short string to the small ring. For the long and Medium strings hook their S-hooks to the ring below them.
- 17** Install the acrylic ball by pushing the double hook into the bottom of the small ring.