

Jackie Pendant

5180704 | I.I

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

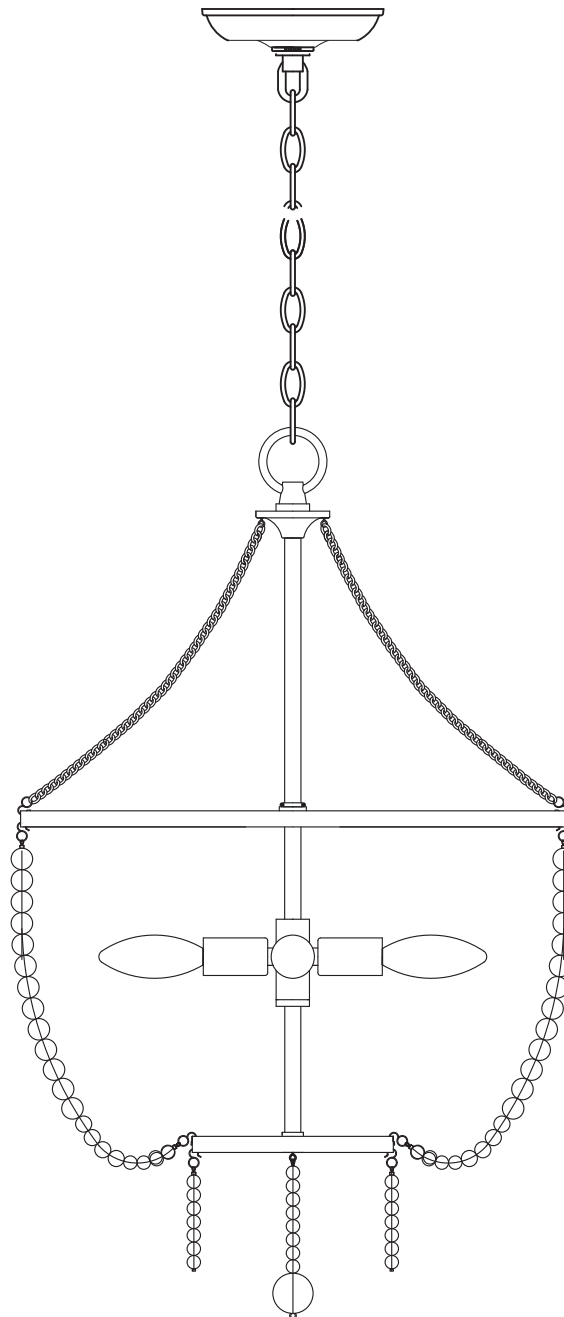

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

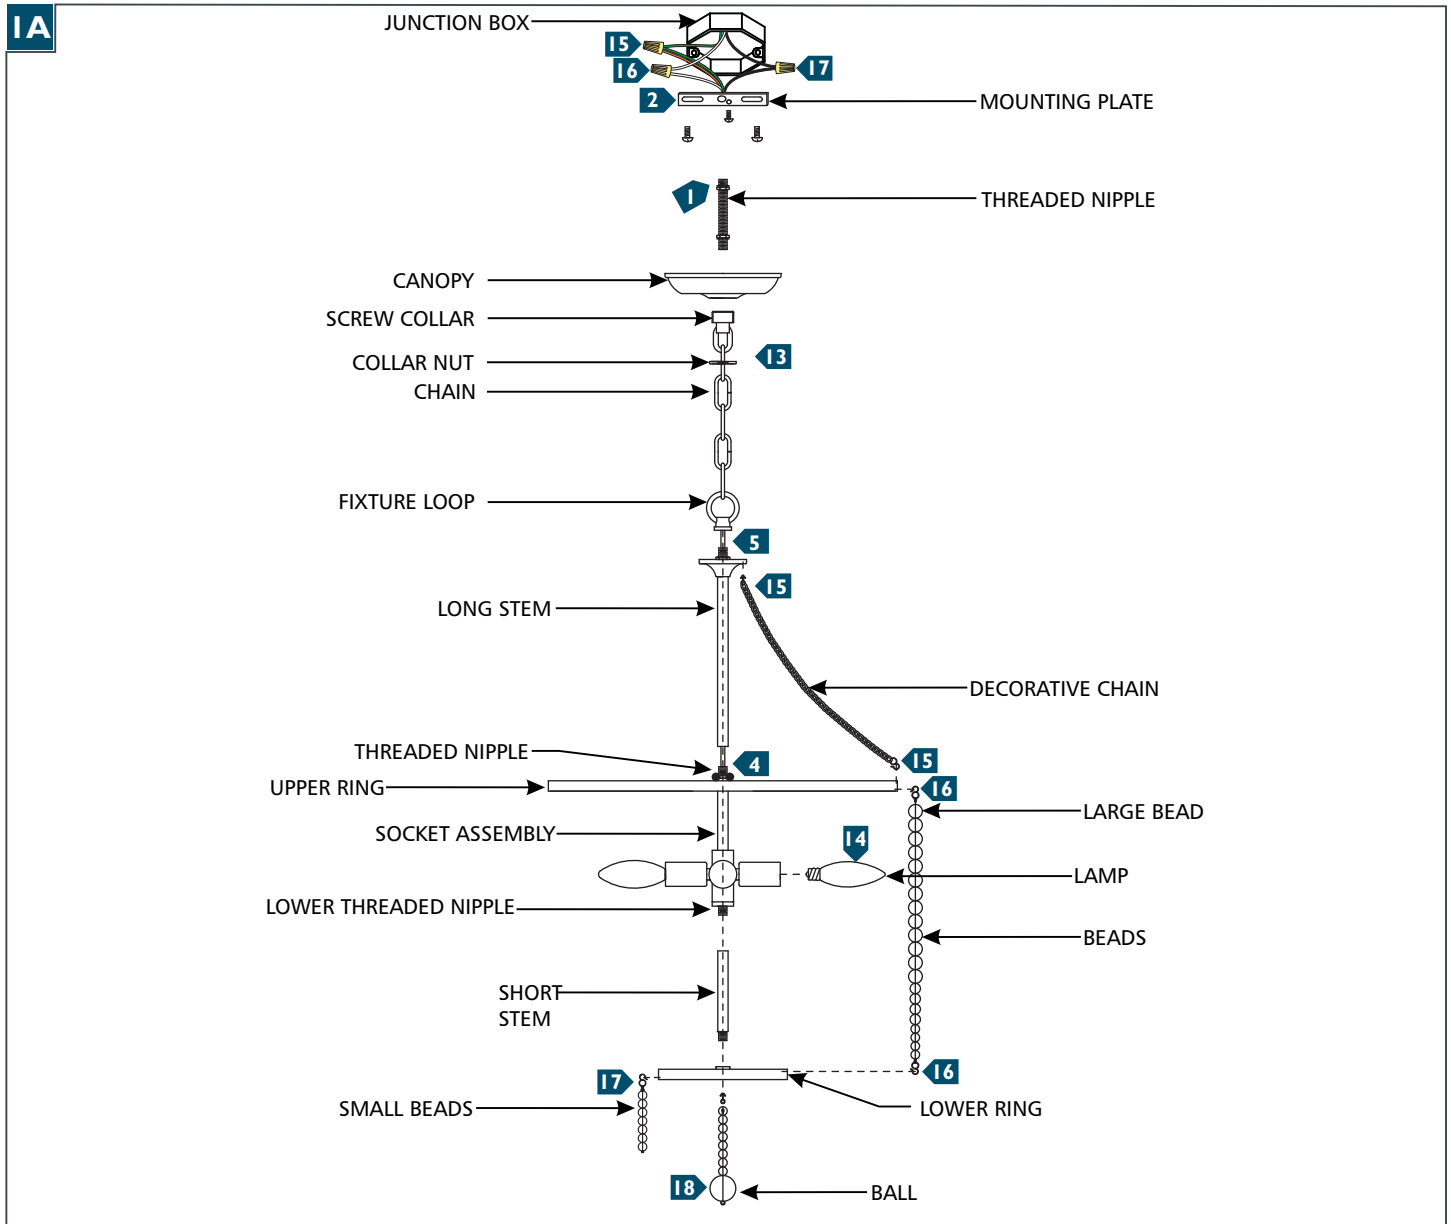

- 1** Screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2** Secure the mounting plate to the junction box.
- 3** Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
- 4** Feed the wires through the long stem, then screw the long stem to the socket assembly.
- 5** Feed the fixture wires through the fixture loop and screw it onto the long stem.
- 6** Screw the short stem onto the bottom of the socket assembly, then screw the lower ring onto the short stem.
- 7** Determine the wanted height of the fixture and remove a portion of the chain by opening a link from the top.
- 8** Install the canopy and the collar nut onto the chain (in that order) then install the fixture assembly onto the screw collar using a quick link.
- 9** Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 14** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.
- 15** Install the decorative chain by pushing the double hook into the top of the long stem and hook the other side to the upper hole of the upper ring. Repeat for each decorative chain.
- 16** Install the beads by hooking the end with the largest bead to the lower holes of the upper ring and the other end to the lower ring.
- 17** Install the small beads by hooking them into the bottom hole on the lower ring.
- 18** Install the ball string by pushing the double hook into the bottom of the small ring.