

# Jackie Semi-Flush Mount

7780703 | 1.0

## VISUAL COMFORT & Co.

STUDIO COLLECTION

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

**SAVE THESE INSTRUCTIONS!**

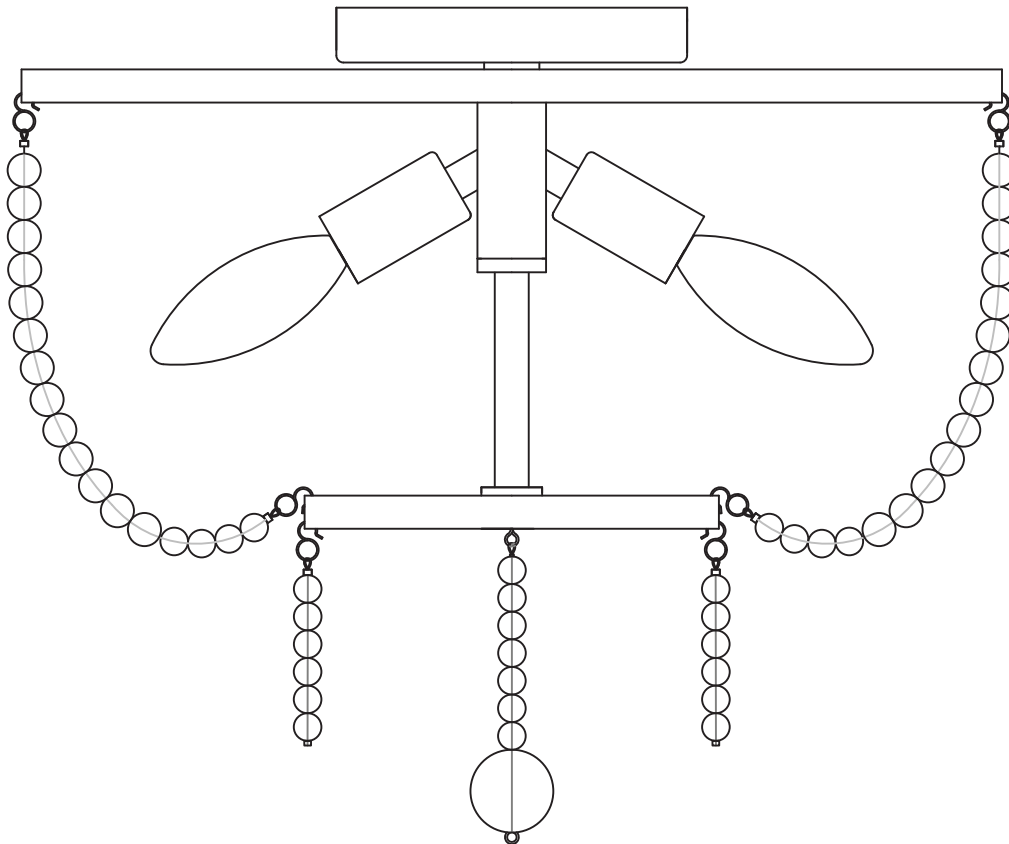

VISUAL COMFORT &amp; Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

IA

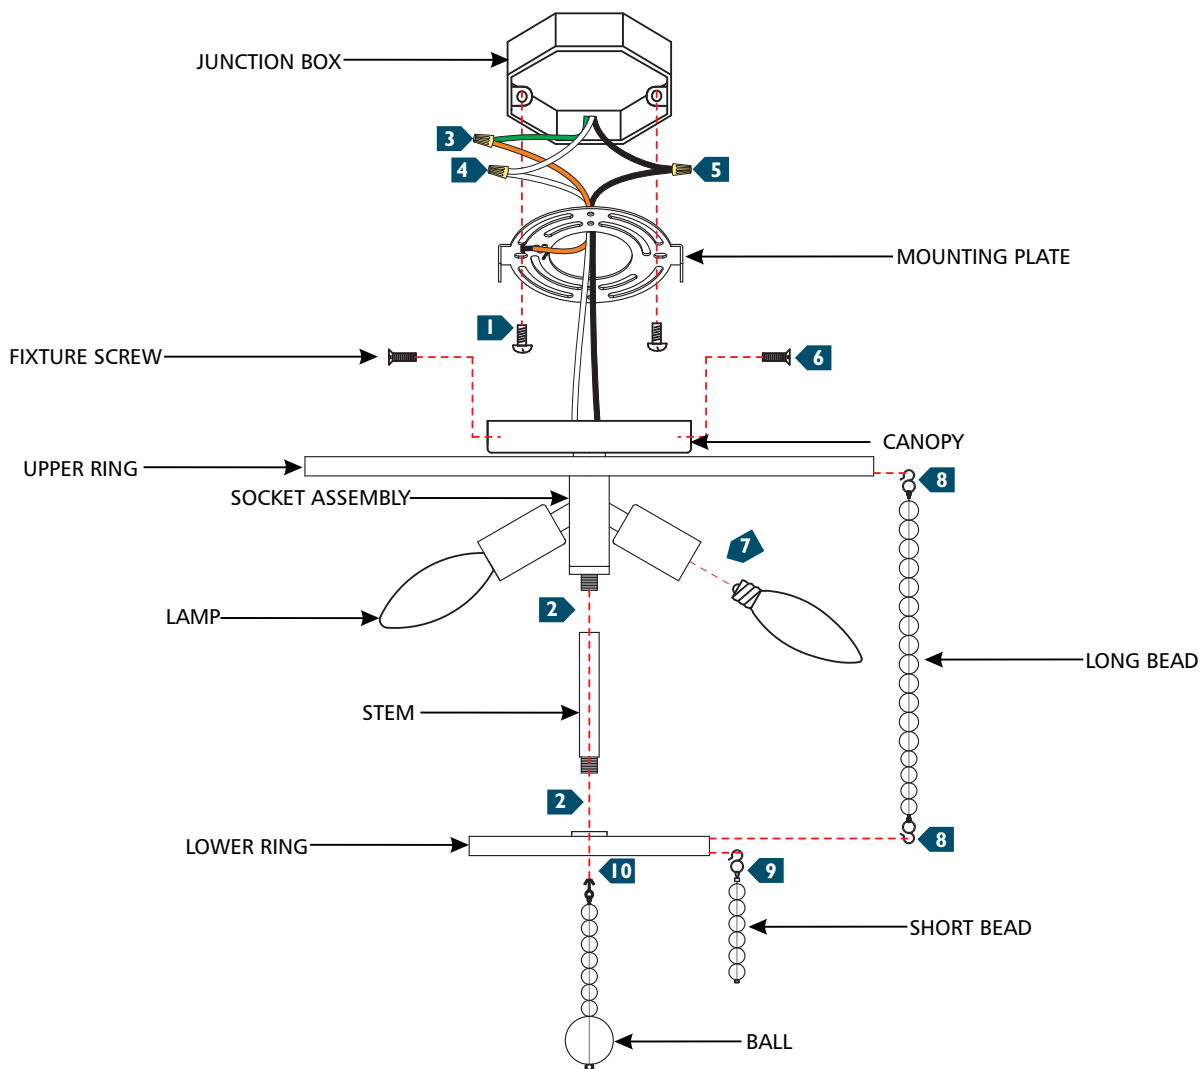

- 1** Secure the mounting plate to the junction box.
- 2** Install the stem to the socket assembly, the lower ring to the stem.
- 3** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 6** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place with the fixture screws.
- 7** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.
- 8** Install the long bead strings by hooking them into a hole on the top ring and then to the corresponding upper hole on lower ring.
- 9** Install the short bead strings by hooking them onto the lower holes on the lower ring.
- 10** Install the ball string by pushing the double hook into the bottom of the small ring.