VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction hoves

This product is safety listed for damp locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


SAVE THESE INSTRUCTIONS!

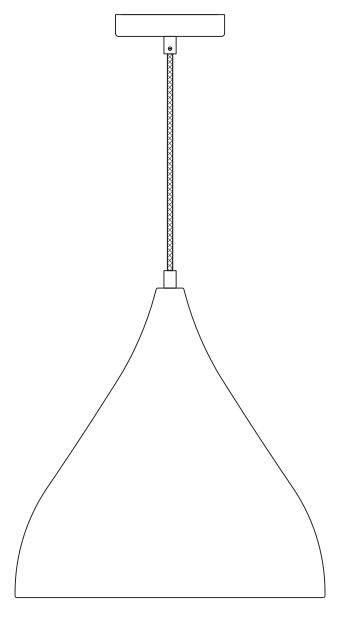

VISUAL COMFORT & CO.

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.visualcomfort.com

Install the Fixture

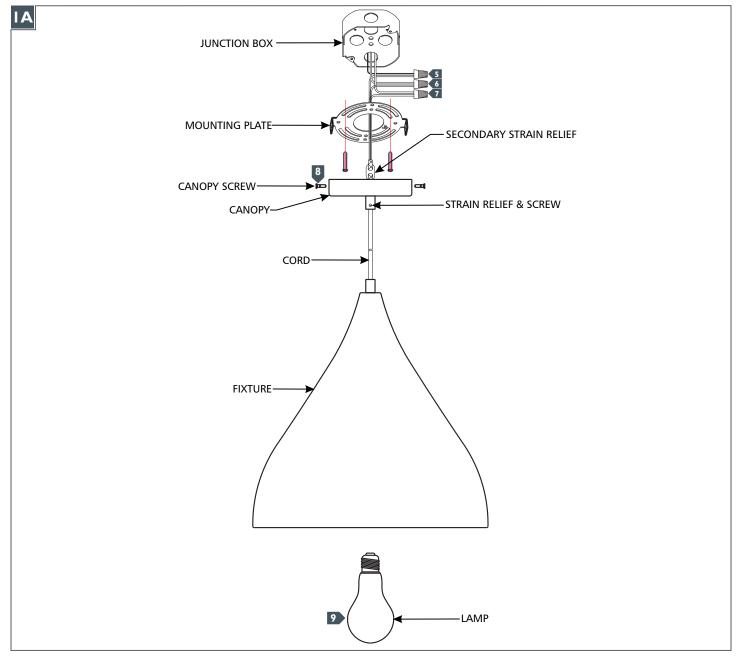

- Feed the fixture cord through the strain relief and canopy until the desired height is achieved, then tighten the strain relief screw.
- 2 Trim the cord leaving enough for electrical connections, strip 4" of insulation from the end (make sure not to nick the inner wires), and then strip the ends of the inner wires.
- 3 Feed the cord through the secondary strain relief.
- 4 Secure the mounting plate to the junction box.
- 5 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- B Neatly place all the wires into the junction box, place the canopy onto the mounting plate, align the holes on the canopy with the screw holes on the mounting plate, and secure it in place with the canopy screws.
- Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.