

Wyn Pendant

5106712, 5206712 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


VISUAL COMFORT & Co.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.visualcomfort.com


©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

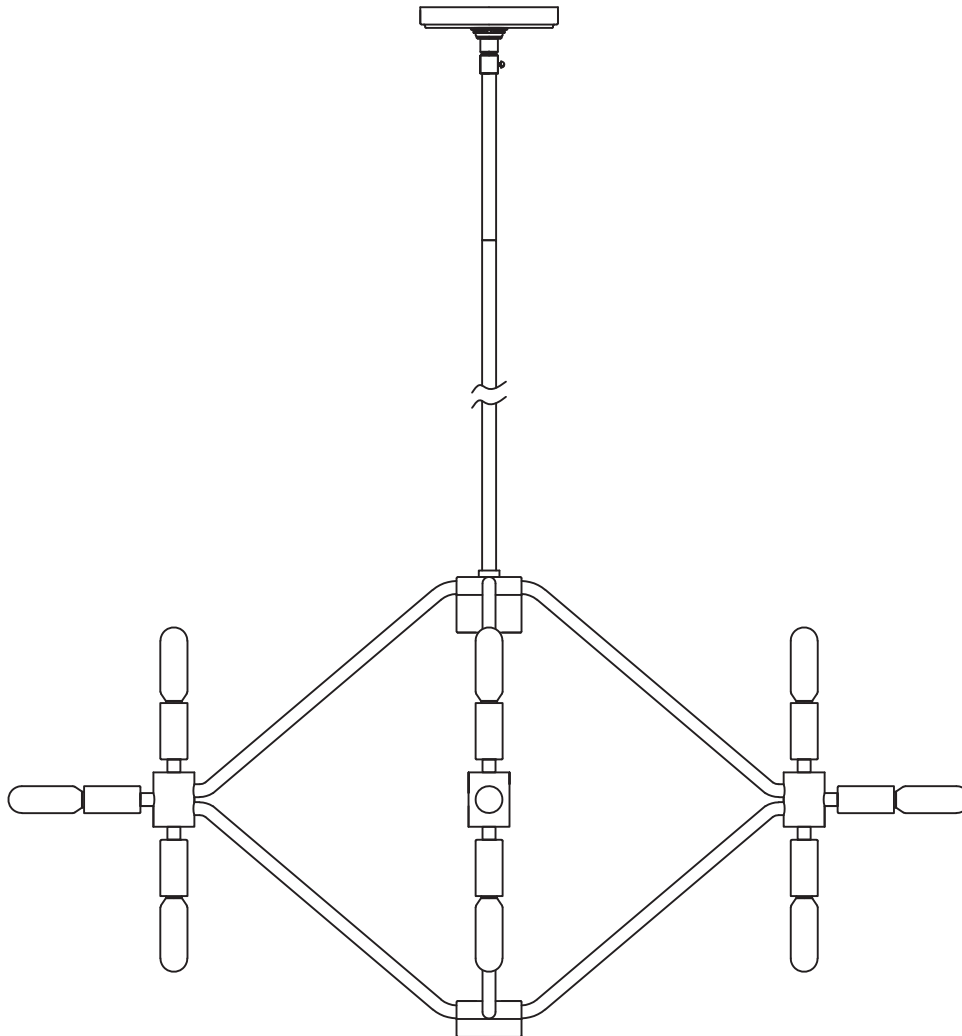

SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

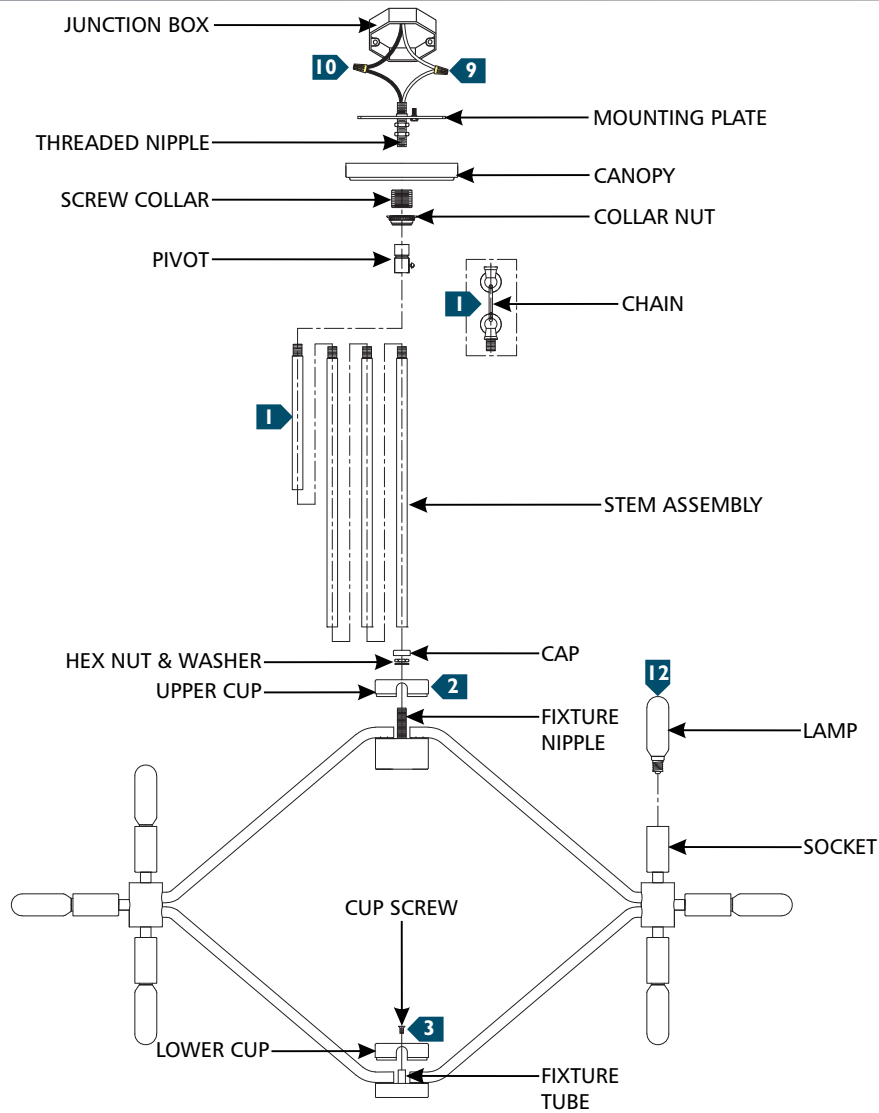

- 1** Determine the wanted height or look of the fixture with the provided pivot, stems and/or chain and assemble them by screwing them together. All the parts may be used alone or used in combination.
- 2** Spread the arms out evenly, then feed the fixture wires through the upper cup, washer, hex nut, and cap, then secure in place by screwing the hex nut onto the fixture nipple. Slide cap onto the fixture nipple.
- 3** Install the lower cup onto the fixture tube and secure in place using the cup screw.
- 4** Feed the fixture wires through the stems/chain and screw the assembly onto the fixture nipple.
- 5** Unscrew the collar nut off the screw collar and place it onto the stem/chain followed by the canopy.
- 6** Feed the fixture wires through the screw collar, threaded nipple. Then screw the screw collar to the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
- 7** Align and secure the mounting plate to the junction box.
- 8** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 9** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 11** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 12** Screw the lamps into the sockets. Refer to the label in the socket for Max Wattage Information.