

# Zire Mini-Pendant

6190301 | 1.0

## GENERATION LIGHTING

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


## GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.visualcomfort.com](http://www.visualcomfort.com)


©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

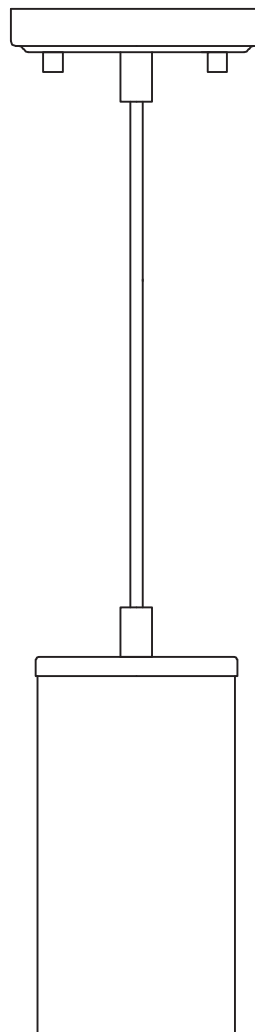

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

1A

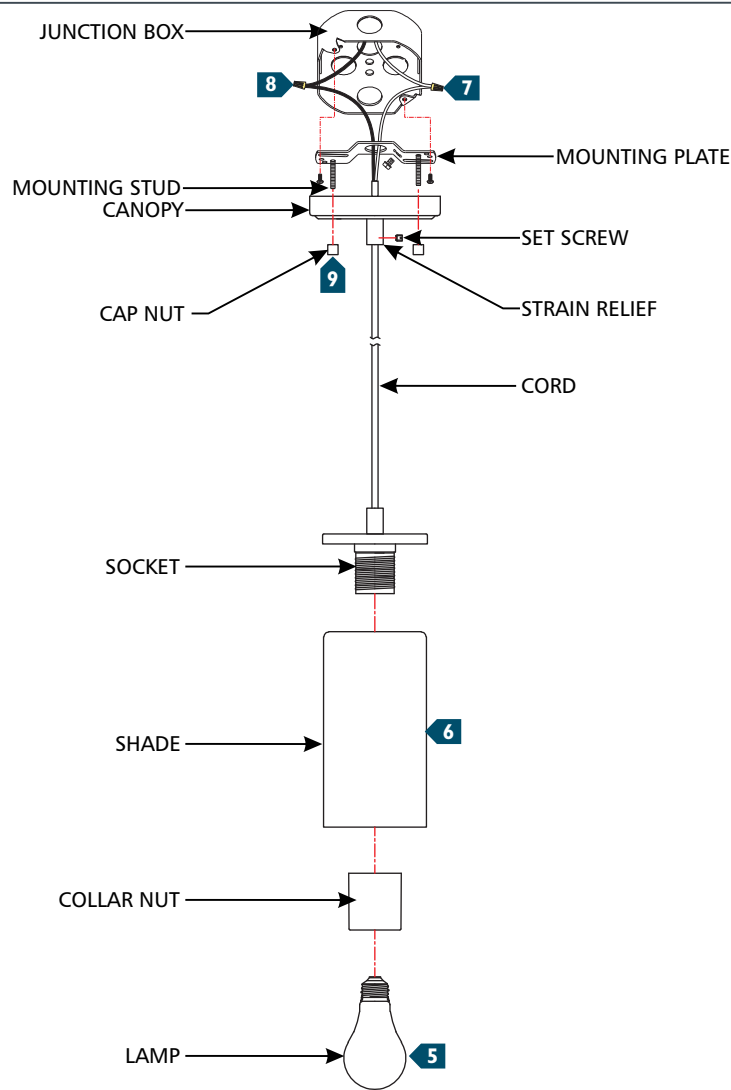

- 1 Secure the mounting plate to the junction box.
- 2 Feed the fixture cord through the strain relief and canopy until the desired length is determined, then tighten the strain relief set screw.
- 3 Cut the excess cord leaving 6" of cord behind, strip the insulation 4" (Make sure not to nick the inner wires), and strip the end of the wires.
- 4 Place the shade over the socket and secure it in place by screwing the shade collar nut onto the socket.
- 5 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9 Neatly place all wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.