


GLIDE GLASS DOWNLIGHT

CENTER FEED LED SUSPENSION WITH POWER

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 02.10.22

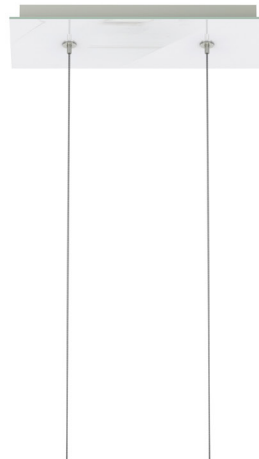


DESCRIPTION

Glide Glass Downlight is a linear LED fixture that offers direct illumination within a clean, contemporary style. Glide is available in various increments, 3 wattages, a 100° beam spread, optional black or white louvers, a variety of finishes, and color temperatures including two Warm Dim options (**27D & 30D**). Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

INSTALLATION

- Includes a 12" Rectangular Canopy used for sizes 36"-96", or a 26" Rectangular Canopy is used for sizes 108"-120"
- Includes adjustable 12ft coaxial cables (fixtures exceeding 84" come with additional aircraft cables)

GLASS FINISHES



Black Glass **GBK** White Glass **GWH** Mirrored Glass **GMI**

LENS

- Diffused White 100° lens offered with optional black or white louvers

APPLICATIONS

Designed for indoor use only. Ideal applications for Residential, Commercial and Hospitality environments.

LAMPING

- Choose from multiple color temperatures from 2400K-4000K including Warm Dim
- Warm Dim - 2700K to 2000K (**27D**) or 3000K to 2000K (**30D**)
- 50,000 Hour Lamp Life

POWER SUPPLY (INCLUDED IN CANOPY)

- UNI Driver: Universal Dimming (TRIAC, ELV, 0-10V)**
- 120V/24V Uni-Drivers

DIMMER (SOLD SEPARATELY)

- ELV (Electronic Low Voltage)
- Triac (Magnetic)
- 0-10V

APPROVALS

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed. Made in America.



Mirrored Glass C1 Canopy, shown with FJ Piston in Satin Nickel (FJ Piston sold separately)

System	Wattage Per Foot	Power Feed	Length in Inches	Color Temperature	Glass Finish
GLD	5W	C	72	27K	GBK
GLD Glide Downlight	5W 4.4 Watt	C Center Feed	36, 48, 60, 72, 84, 96, 108, 120	24K 2400K Very Warm White	GBK Black Glass
GLDB Glide Downlight with Black Louver	7W 7.5 Watt			27K 2700K Incandescent White	GWH White Glass
GLDW Glide Downlight with White Louver	10W 9.6 Watt			27D 2700K Warm Dim (5W only)	GMI Mirrored Glass
				30K 3000K Warm White	
				30D 3000K Warm Dim (5W only)	
				35K 3500K Neutral White	
				40K 4000K Cool White	

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

GLIDE GLASS DOWNLIGHT

CENTER FEED LED SUSPENSION WITH POWER


NOMINAL LAMP DATA: Lamp data for the Glide Glass Downlight Center Feed

GLD																	
100 Degree Diffused White Lens																	
DESCRIPTION	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
WATTS PER FOOT	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
COLOR TEMPERATURE	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	264	290	359	317	359	363	395	431	475	518	593	645	559	615	671	769	836
LUMENS PER WATT (lm/w)	60	65	75	72	75	83	89	59	65	71	81	88	58	64	70	80	87
CRI	90+	95+	92+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+

GLDW																	
100 Degree Diffused White Lens with White Louver																	
DESCRIPTION	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
WATTS PER FOOT	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
COLOR TEMPERATURE	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	185	203	252	222	252	254	276	302	332	363	415	452	392	430	470	539	586
LUMENS PER WATT (lm/w)	42	46	52	50	52	58	63	41	45	50	57	62	41	45	49	56	61
CRI	90+	95+	92+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+


GLDB																	
100 Degree Diffused White Lens with Black Louver																	
DESCRIPTION	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
WATTS PER FOOT	5w (4.4 watts)							7w (7.5 watts)					10w (9.6 watts)				
COLOR TEMPERATURE	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	116	127	157	139	157	159	173	189	208	227	260	283	245	269	294	337	366
LUMENS PER WATT (lm/w)	26	29	33	31	33	36	39	26	28	31	36	39	25	28	31	35	38
CRI	90+	95+	92+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+

*27D, 30D - Warm Dim (4.8 Watts)

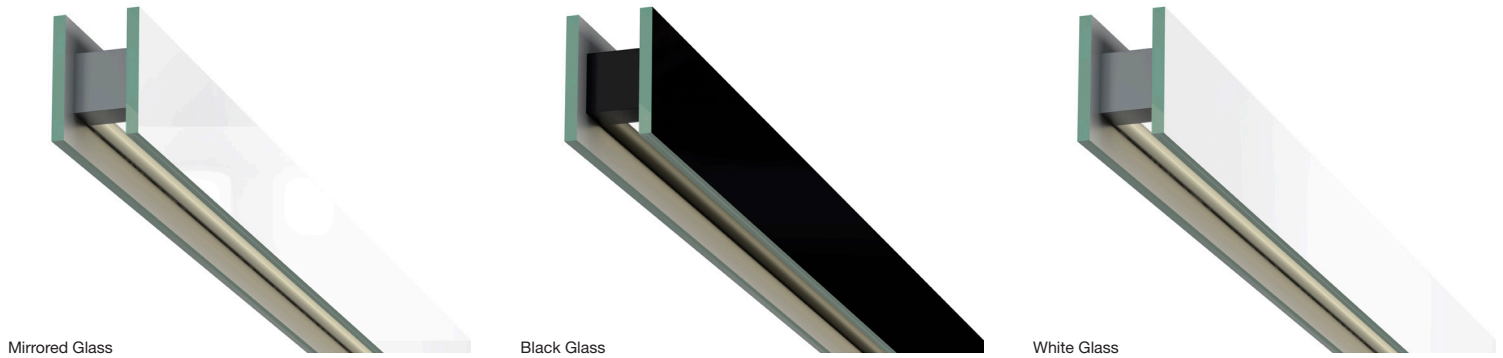

PROJECT	FIXTURE TYPE	DATE	White Glass
---------	--------------	------	-------------

Drawings: Canopy and Channel Sizes for the Glide Glass Downlight - Center Feed

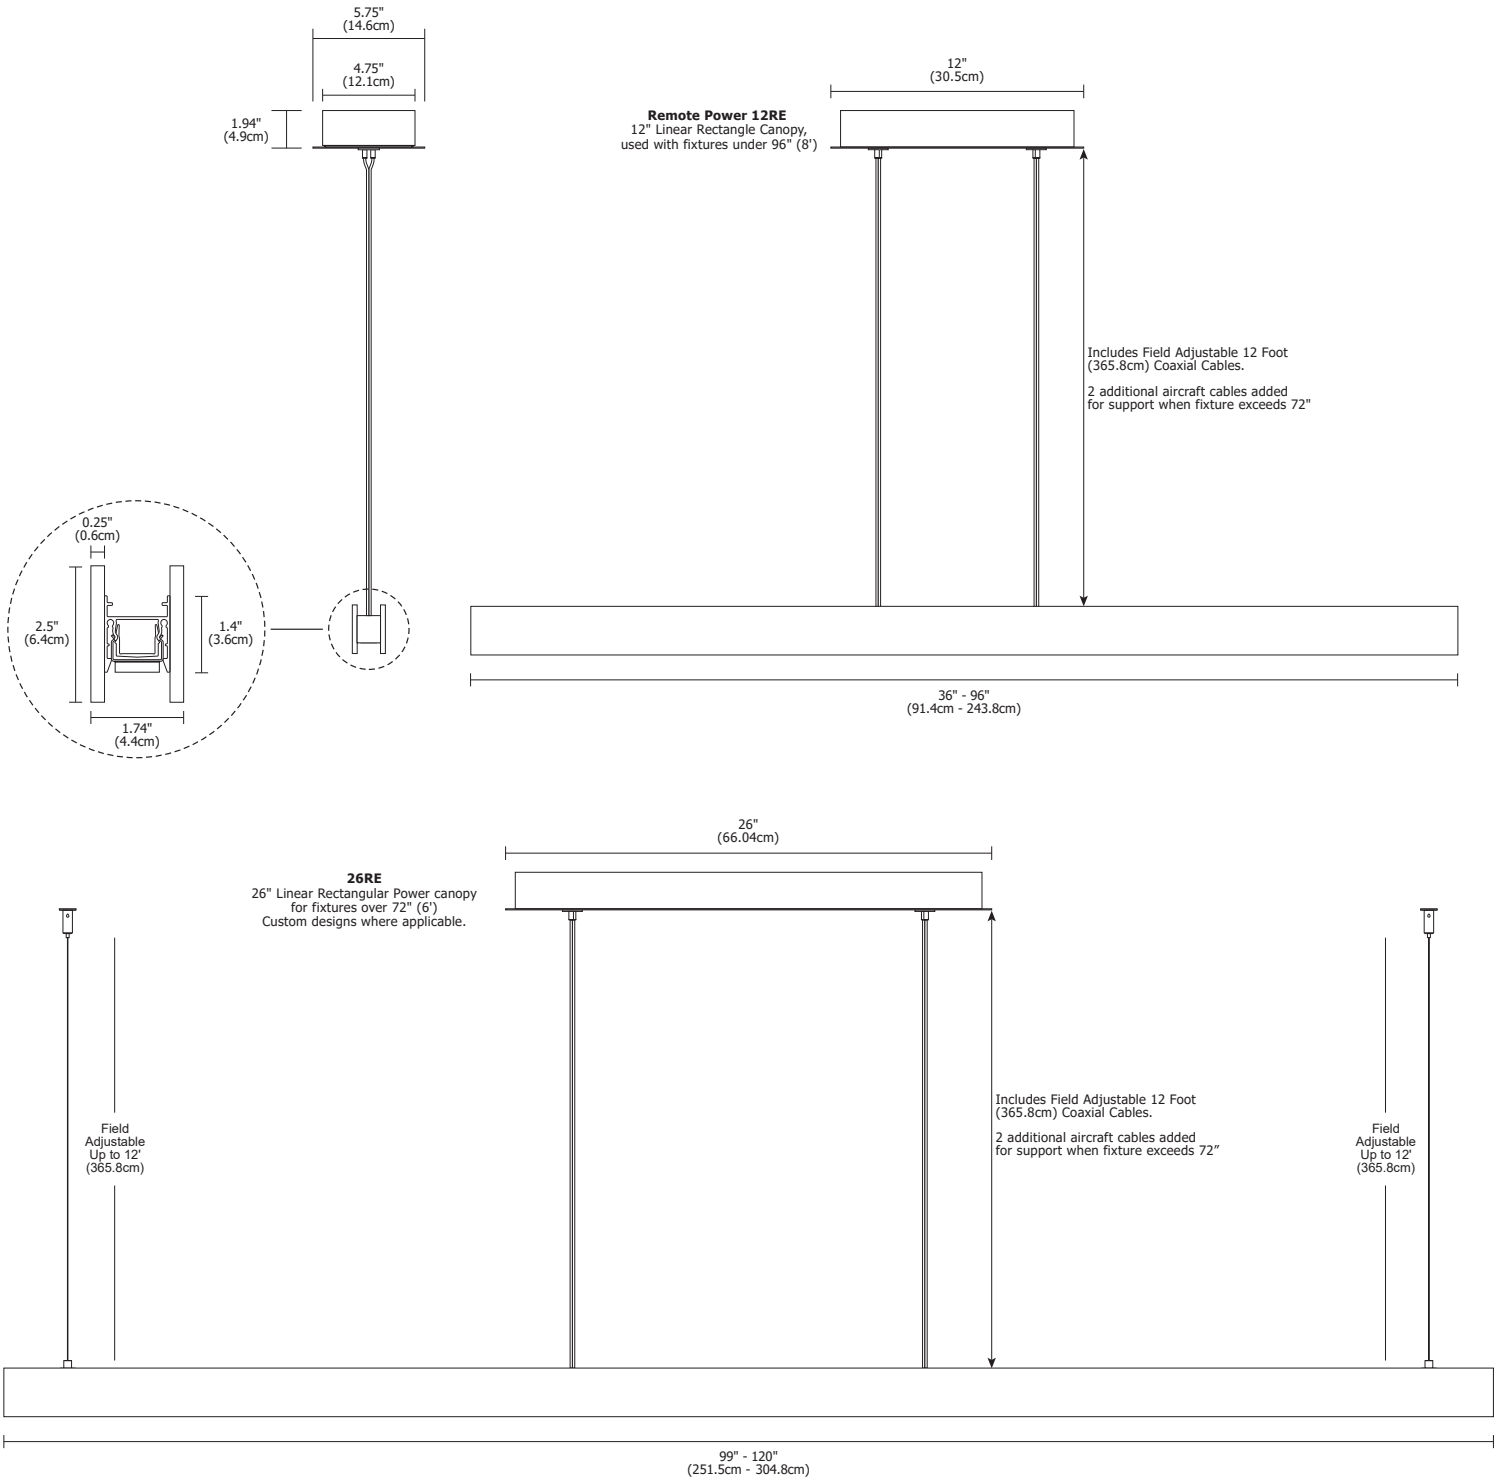

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


SUSPENSION TM30 DATA

CENTER FEED LED SUSPENSION WITH POWER

TM-30-15 DATA: The data below is for SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


SUSPENSION TM30 DATA

CENTER FEED LED SUSPENSION WITH POWER

TM-30-15 DATA: The data below is for SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--