


**ACADIA Chandelier**  
**3-6142-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

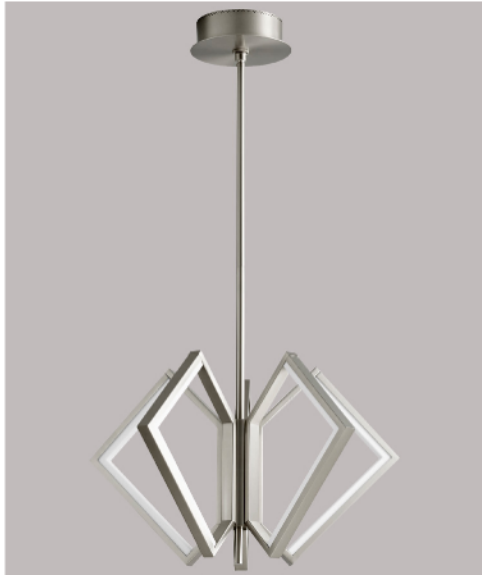

-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	75.6W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 2500 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	24Vdc Constant Voltage, 3.2A max current
<b>DIMMING</b>	TRIAC Dimming (Forward Phase, Magnetic Low Voltage)
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.



**DIMENSIONS**

<b>Dia. Canopy:</b>	<b>6.69"</b>
<b>W. Fixture:</b>	<b>25.00"</b>
<b>H. Fixture:</b>	<b>15.25"</b>
<b>Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height</b>	

Note: Canopy swivel allows up to a 22° slope

Order example for standard fixture:  
**3-6142-40** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V Only

