

**ALBEDO Outdoor**  
**3-770-15**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black (Lit)



-15 Black

LIGHT SOURCE	(1x) 6W LED with Driver on board, 3000K, CRI 90
LUMINAIRE POWER	6.6W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 182 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DIMMING	TRIAC Dimming 100-10%
CONSTRUCTION	Cast Aluminum Housing
DIFFUSER	- Clear Bubble Crystal Glass
FINISHES	Black (-15)
MOUNTING	4" Octagonal J-Box (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	cETL Wet listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

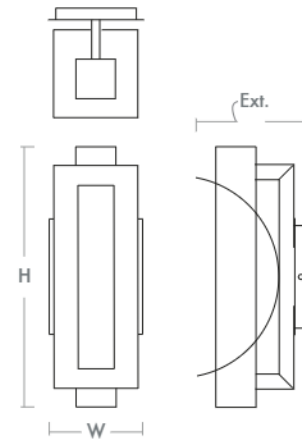

**DIMENSIONS**

<b>W:</b>	<b>5.00"</b>
<b>H:</b>	<b>14.00"</b>
<b>Ext:</b>	<b>5.875"</b>
<b>M.C:</b>	<b>7.00" From top of fixture</b>

Order example for standard fixture:  
**3-770-15** (x-xxx: LED Sequence # / -xx: Finish)

