

APERTO Outdoor
3-722-15


oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



-15 Black

LIGHT SOURCE 1 x 12W LED with Driver on board, 3000K, CRI 90
LUMINAIRE POWER 12W at 120V
RATED LIFE 50000 hr RL
OPTIONAL COLOR TEMPERATURES 3000K Only
LUMEN OUTPUT Delivered: 465 lm (LM-79)
INPUT VOLTAGE 120V AC, 50/60Hz
DRIVER OUTPUT N/A
DIMMING TRIAC Dimming
CONSTRUCTION Cast Aluminum Housing
DIFFUSER - Etched White Glass
FINISHES Black (-15)
MOUNTING 4" Octagonal J-Box
 (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS ETL Wet listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

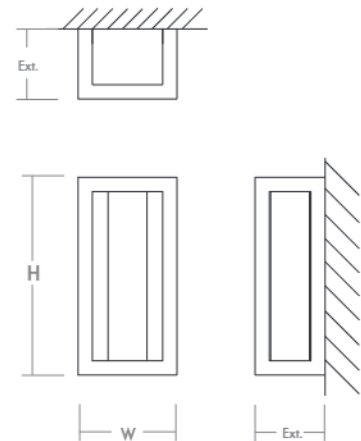

DIMENSIONS
W: 6.00"
H: 12.00"
Ext: 4.25"
M.C: 4.00" From top of fixture

Order example for standard fixture:
3-722-15 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

