

ARCHER Vanity
3-575-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____




-20 Polished Nickel



-24 Satin Nickel

LIGHT SOURCE 1 x 11.7W LED, 3000K, CRI 90
LUMINAIRE POWER 14.2W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 1206 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 350mA, 14.7W max power
DIMMING TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Acrylic
DIFFUSER - Matte White Acrylic
FINISHES Polished Nickel (-20), Satin Nickel (-24)
MOUNTING 4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant,
Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

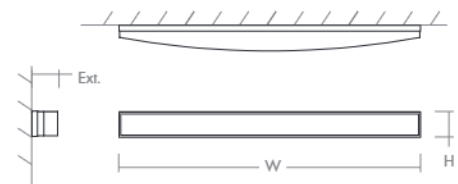

DIMENSIONS

W: 26.75"

H: 2.25"

Ext: 2.50"

M.C: 1.125" From Top of Fixture

Order example for standard fixture:

3-575-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-575-2724**

27: 2700K, 35: 3500K, 40: 4000K

