

**BALANCE Vanity**  
**3-547-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-20 Polished Nickel



-24 Satin Nickel

LIGHT SOURCE	1 x 11.7W LED, 3000K, CRI 90
LUMINAIRE POWER	14.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1020 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

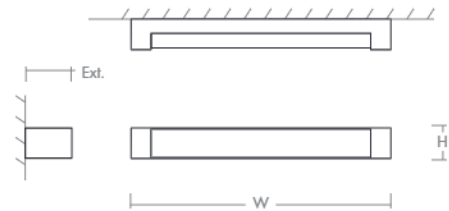

**DIMENSIONS**

<b>W:</b>	<b>24.75"</b>
<b>H:</b>	<b>2.50"</b>
<b>Ext:</b>	<b>3.50"</b>
<b>M.C:</b>	<b>1.25" From top of fixture</b>

Order example for standard fixture:

**3-547-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-547-2724**

27: 2700K, 35: 3500K, 40: 4000K

