

BEACON Wall Sconce
3-587-xxx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-95 Old World



-24 Satin Nickel




-1 White Cotton



-2 Matte White Acrylic

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Fabric: 668 lm (LM-79) (-2) Acrylic: 441 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic /or Fabric
DIFFUSER/ METAL FINISHES	(-124) White Cotton / Satin Nickel (-195) White Cotton / Old World (-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World
MOUNTING	4" Octagonal J-Box
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

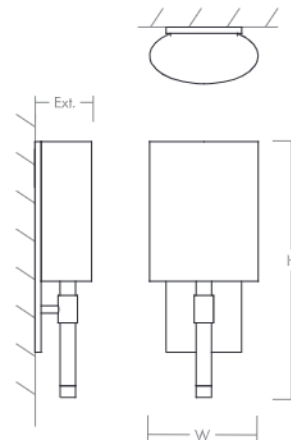

DIMENSIONS

W:	7.00"
H:	16.50"
Ext:	3.75"
M.C:	4.50" From top of fixture

Order example for standard fixture:
3-587-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-587-27124**
 27: 2700K, 35: 3500K, 40: 4000K

