

**DARIO Wall Sconce**  
**3-400-xxxx**

oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-1541 Black/Weathered Oak



-640 White/Aged Brass




-1524 Black/Satin Nickel



-1540 Black/Aged Brass

<b>LIGHT SOURCE</b>	(2x) 3W LED Arrays, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	7.3W Input Power
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 270 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	180mA, 7.6W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	White/Aged Brass (-640), Black/Satin Nickel (-1524), Black/Aged Brass (-1540), Black/Weathered Oak (-1541)
<b>MOUNTING</b>	4" Octagonal J-Box*, 4" Square J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

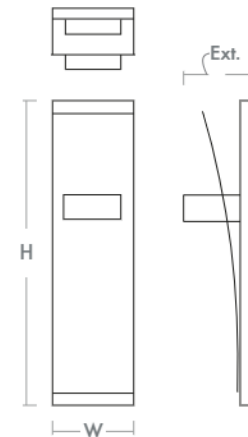

**DIMENSIONS**

<b>W:</b>	<b>4.25"</b>
<b>H:</b>	<b>16.00"</b>
<b>Ext:</b>	<b>3.25"</b>
<b>M.C:</b>	<b>8.00" From top of fixture</b>

Order example for standard fixture:

**3-400-640** (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-400-27640**

27: 2700K, 35: 3500K, 40: 4000K

